



THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.  
COPY RIGHT@2020 RION TECHNOLOGY

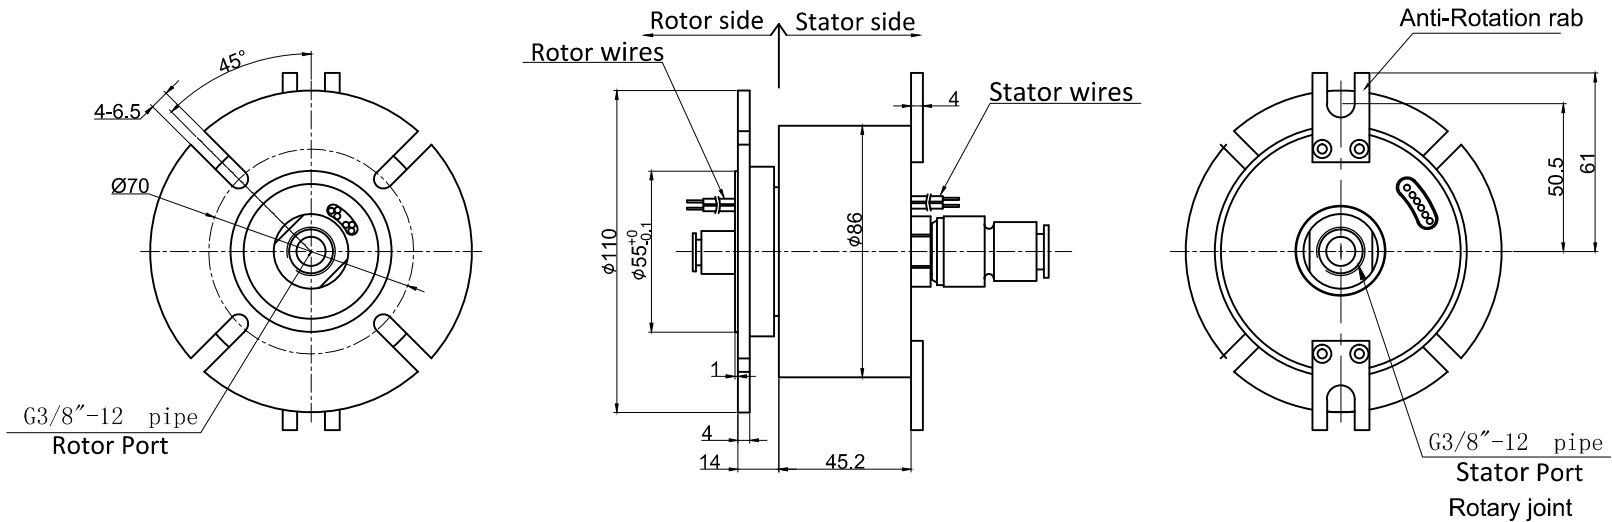

Rotary joints:	The road:	1 passage gas
	Channel pressure:	1 MPa
	Quality interface:	Air
	Working Speed:	0-10rpm
	Working Temperature:	-30°C + 80°C
	Housing Material:	AL Alloy

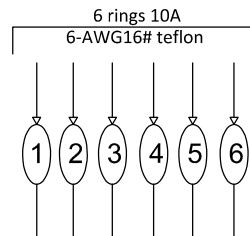

UNLESS OTHERWISE SPECIFIED		1 passage gas+6 rings 10A	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR		TOLERANCES (EXCEPT AS NOTED)	
2.MATERIAL & FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		MODEL RAPH100-04-G1201-P0610	
DECIMAL X±.1		SIZE A	
XXX±.005		R E V. A / 0	
FILLETS R.015 FINISH ✓		SCALE 1:1	
THIRD ANGLE PROJECTION		UNIT mm	
ANGULAR±1°		RION	

### Electrical Specification

1 Rings	6	2 Current	Power module:6rings, 10A/ring
2 Voltage	0-380VDC/VAC		
3 Insulation Resistance	500MΩ@500VDC		
4 Electrical noise	Max.10mΩ;		
5 Dielectric strength	500VAC@50Hz;60S		

### Mecchanical Specification

6 Speed	0~100RPM;	7 Torque	Max.0.2 N.M;
8 Life	Typical 10million revolutions, but strongly depends on your working conditions		

### Environmental adaptability

9 Working temperature	-40℃~+80℃	10 Storage temperature	-45℃~+85℃
11 humidity	85±3%(30℃+5℃)		
12 Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times		
13 IP Class	IP51		

### Materral/Attachment

14 Contact Material	noble metal	15 Housing material	AL Alloy+engineering plastic
16 Lead wire	Rotor:300mm(See wiring diagram) Stator:300mm(See wiring diagram)		