
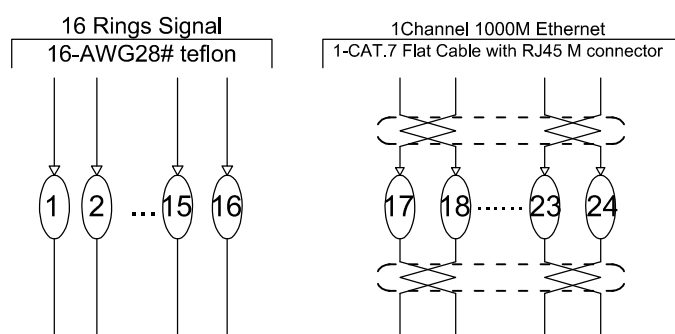



THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2020 RION TECHNOLOGY

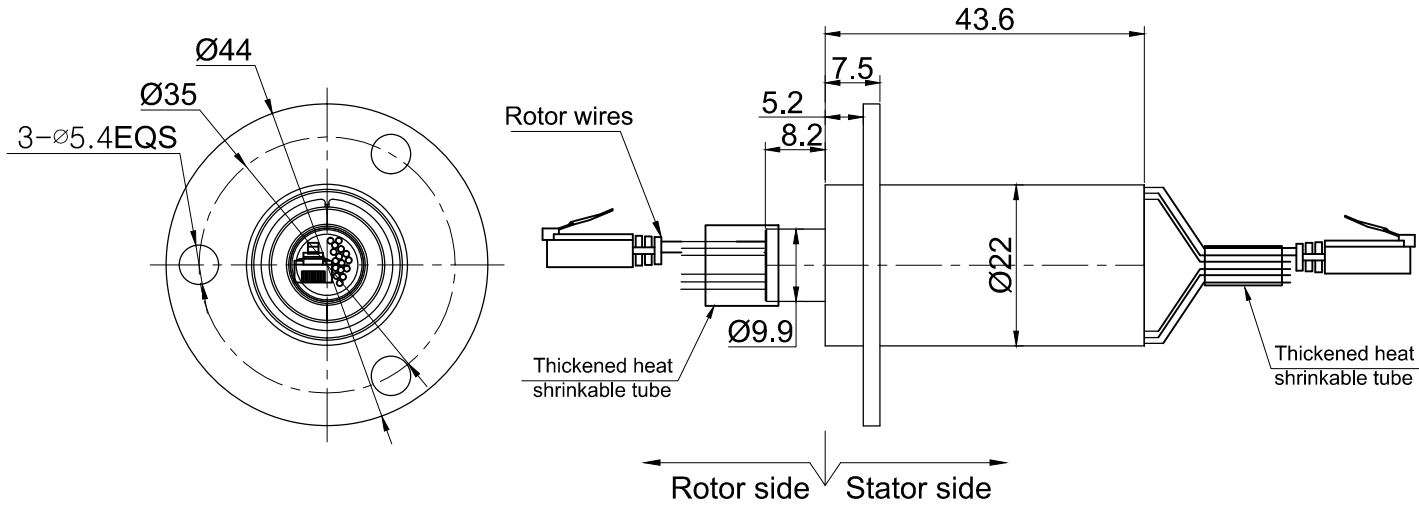

Electrical Specification			
1 Rings	24	2 Current	Signal module:16 Rings Signal + 1Channel 1000M Ethernet
2 Voltage	0-120VDC/VAC		
3 Insulation Resistance	100MΩ@220VDC		
4 Electrical noise	Max.10mΩ;		
5 Dielectric strength	100VAC@50Hz;60S		

Mechanical Specification			
6 Speed	0~250RPM;	7 Torque	Max.0.2 N.M;
8 Life	Typical 10million revolutions, but strongly depends on your working conditions		

Environmental adaptability			
9 Working temperature	-40℃~+80℃	10 Storage temperature	-45℃~+85℃
11 humidity	85±3%(30℃+5℃)		
12 Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times		
13 IP Class	IP51		

UNLESS OTHERWISE SPECIFIED		16 Rings Signal +1Channel 1000M Ethernet	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		TOLERANCES (EXCEPT AS NOTED)	
2.MATERIAL &FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		MODEL	RE1221-S16
FILLETS R.015	FINISH <input checked="" type="checkbox"/>	DECIMAL	X±.1 XX±.03 XXX±.005
THIRD ANGLE PROJECTION	ANGULAR±1°		
		SIZE	A
		R.E.V.	A / 0
		SCALE	1:1
		UNIT	mm

Material/Attachment			
14 Contact Material	noble metal	15 Housing material	engineering plastic
16 Lead wire	Rotor:300mm(See wiring diagram) Stator:300mm(See wiring diagram)		