


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORISED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.  
COPY RIGHT@2020 RION TECHNOLOGY

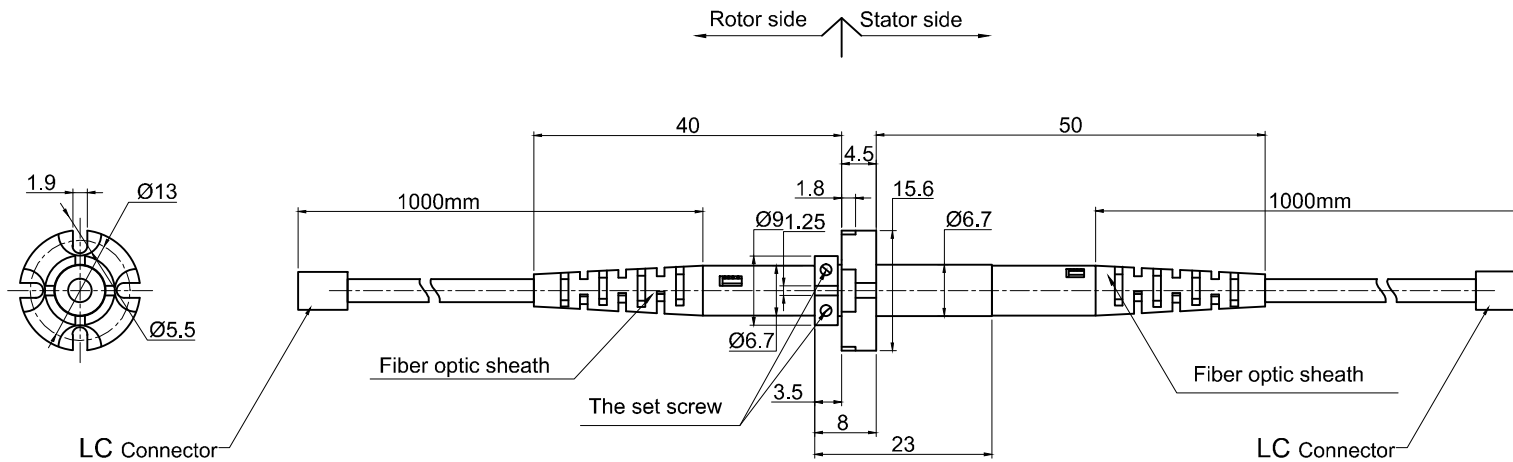

UNLESS OTHERWISE SPECIFIED		1 channel single mode fiber	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		TOLERANCES EXCEPT AS NOTED:	MODEL RFO100A-01-LC-01
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		DECIMAL X±.1 XX±.03 XXX±.005	SIZE A
FILLETS R.015	FINISH	FRACTIONAL±1/16	R E V. A / 0
THIRD ANGLE PROJECTION		ANGULAR±1°	SCALE 1:1
			UNIT mm

Optical fiber:	
1.SMF optical fiber(9/125um)	2.Wavelength: 1310nm~1550nm
3.Insertion loss (23°): <1.5dB	4.Insertion loss ripple: <0.6dB
5.Return loss: >55dB	6.Power:MAX 0.5W
7.Max Speed: 600rpm	8.Work temperature: -40°C ~+ 80°C
9. Type: LC	10.IP Class:IP65