



THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2020 RION TECHNOLOGY

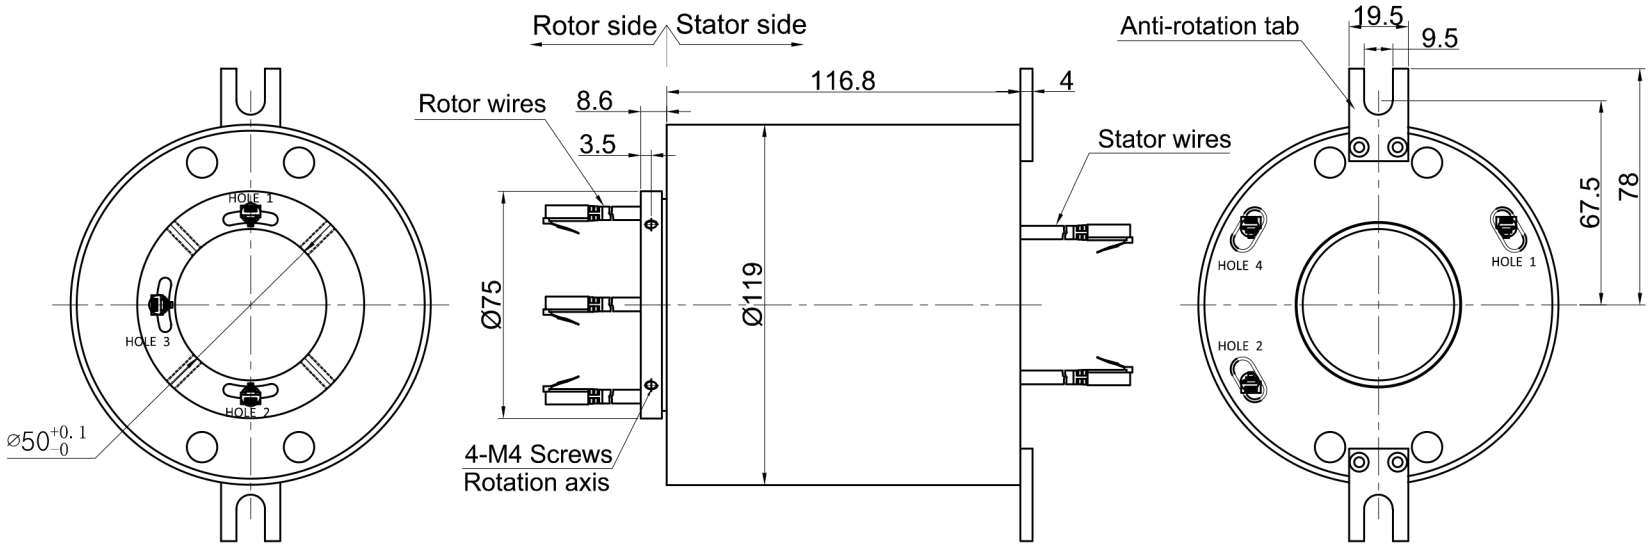

12 Rings EtherCat Signal+3 Rings shield
CAT.5E cable with RJ45 M connector

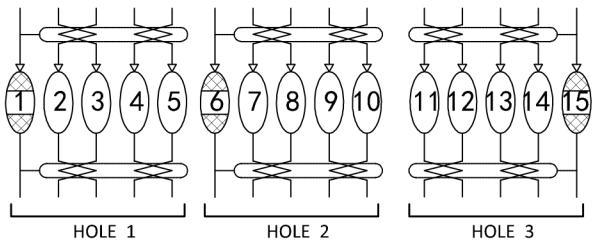

Electrical Specification

1 Rings	15	2 Current	Signal module:12 rings, EtherCat 3 rings, shield
2 Voltage	0-380VDC/VAC		
3 Insulation Recistance	500MΩ@500VDC		
4 Electrical noise	Max.10mΩ;		
5 Dielectric strength	500VAC@50Hz;60S		

Mecchanical Specification

6 Speed	0~250RPM;	7 Torque	Max.2 N.M;
8 Life	Typical 10million revolutions, but strongly depends on your working conditions		

Environmental adaptability

9 Working temperature	-40℃~+80℃	10 Storage temperature	-45℃~+85℃
11 humidity	85±3%(30℃+5℃)		
12 Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times		
13 IP Class	IP65		

Materral/Attachment

14 Contact Material	noble metal	15 Housing material	AL Alloy
16 Lead wire	Rotor:300mm(See wiring diagram) Stator:300mm(See wiring diagram)		

UNLESS OTHERWISE SPECIFIED		12 Rings EtherCat Signal+3 Rings shield	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		TOLERANCES EXCEPT AS NOTED	
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		MODEL RX00709002	
DECIMAL X±.1 XX±.03 XXX±.005		RION	
FILLETS R.015 FINISH ✓		SIZE A	
THIRD ANGLE PROJECTION		REV. A/0	
FRACTIONAL±1/16 ANGULAR±1°		SCALE 1:1	
		UNIT mm	