
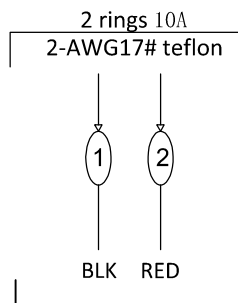


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2020 RION TECHNOLOGY

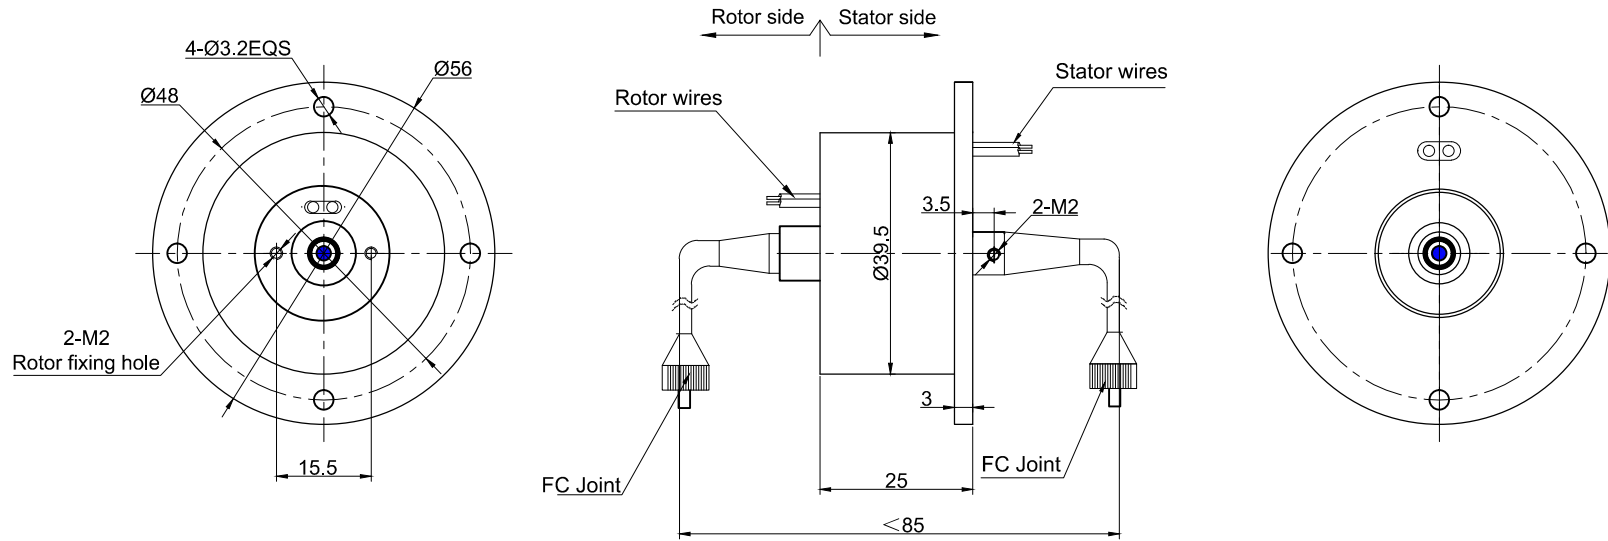

Optical fiber:	
1.SMF optical fiber(9/125um)	2.Wavelength: 1310nm~1550nm
3.Insertion loss (23°): <4 dB	4.Type: FC
5.Return loss: >50dB	6.Lead wire: Rotor:500mm Stator:210mm

Electrical Specification			
1 Rings	2	2 Current	Power module:2 rings;10A/ring
3 Voltage	0-800VDC		
4 Insulation Resistance	1000MΩ@1000VDC		
5 Electrical noise	Max.10mΩ;		
6 Dielectric strength	1000VDC;60S		
Mecchanical Specification			
7 Speed	0~250RPM;	8 Torque	Max.0.2 N.M;
9 Life	Typical :10million revolutions, but strongly depends on your working conditions		
Environmental adaptability			
10 Working temperature	-40℃~+80℃	11 Storage temperature	-45℃~+85℃
12 humidity	85±3%(30℃+5℃)		
13 Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times		
14 IP Class	IP51		
Materral/Attachment			
15 Contact Material	noble metal	16 Housing material	SS304
17 Lead wire	Rotor:1200mm(See wiring diagram) Stator:520mm(See wiring diagram)		

UNLESS OTHERWISE SPECIFIED		1 channel single mode fiber+2 rings 10A	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR		TOLERANCES (EXCEPT AS NOTED)	
2.MATERIAL & FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		MODEL	RX00804002
DECIMAL X±.1 XX±.03 XXX±.005		SIZE	A
FILLET R.015	FINISH ✓	R E V.	A / 0
THIRD ANGLE PROJECTION		SCALE	1:1
ANGULAR±1°		UNIT	mm