
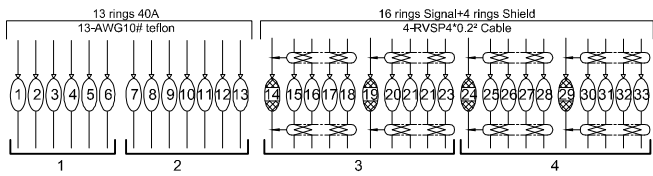


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2020 RION TECHNOLOGY

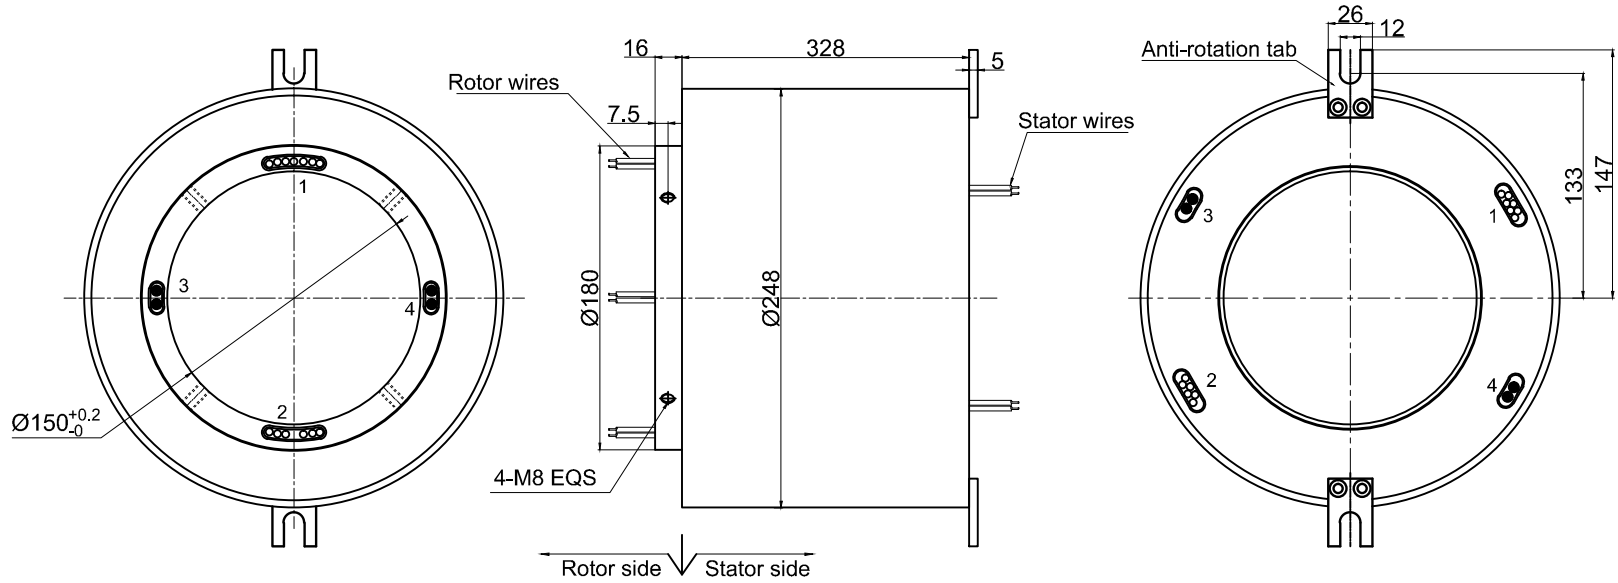

Electrical Specification			
1 Rings	33	2 Current	Power module: 13 rings,40A/ring Signal module: 16 rings Signal+ 4 rings Shield
2 Voltage	0-300VDC/VAC		
3 Insulation Resistance	500M Ω @500VDC		
4 Electrical noise	Max.5m Ω ;		
5 Dielectric strength	500VAC@50Hz;60S		
Mechanical Specification			
6 Speed	0~300RPM;	7 Torque	Max.0.3 N.M;
8 Typical Life	10million revolutions, but strongly depends on your working conditions		
Environmental adaptability			
9 Working temperature	-40 $^{\circ}$ C~+80 $^{\circ}$ C	10 Storage temperature	-45 $^{\circ}$ C~+85 $^{\circ}$ C
11 humidity	85 \pm 3%(30 $^{\circ}$ C+5 $^{\circ}$ C)		
12 Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times		
13 IP Class	IP51		
Material/Attachment			
14 Contact Material	noble metal	15 Housing material	ALL Alloy
16 Lead wire	Rotor:1500mm(See wiring diagram) Stator:1500mm(See wiring diagram)		

UNLESS OTHERWISE SPECIFIED

1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT

TOLERANCES EXCEPT AS NOTED:

DECIMAL	X \pm .1
	XX \pm .03
	XXX \pm .005

FILLET R.015 FINISH \checkmark

THIRD ANGLE PROJECTION

13 rings 40A+
16 rings Signal+4 rings Shield
MODEL RX01102006

RION

SIZE	A
RE V.	A / 0
SCALE	1:1
UNIT	mm

FRACTIONAL 1/16 ANGULAR $\alpha \pm 1^{\circ}$