
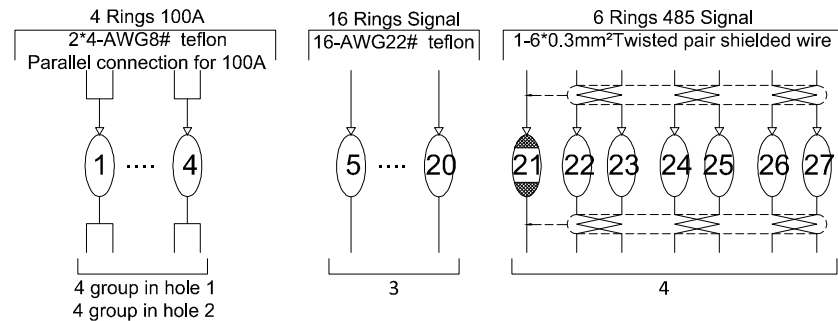


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2020 RION TECHNOLOGY

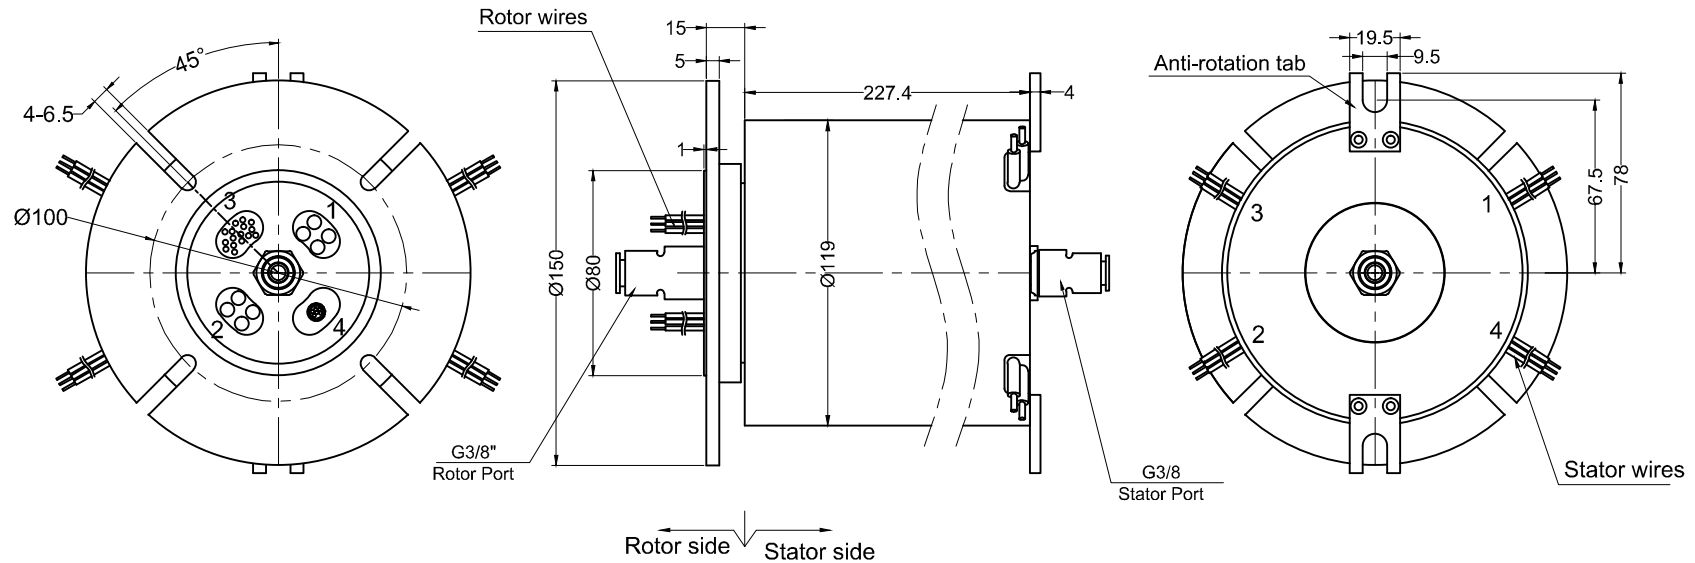

UNLESS OTHERWISE SPECIFIED		1 passage Air+ 4 rings 100A + 23 rings signal	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR		MODEL RX01112001	
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		SIZE A	
FILLETS R.015 FINISH <input checked="" type="checkbox"/>		RE V. A / 0	
THIRD ANGLE PROJECTION		SCALE 1:1	
		UNIT mm	
		RION	
		FRACTIONAL 1/16	
		ANGULAR $\pm 1^\circ$	

Technical parameters of rotary joint

1 Pressure	Max 1 Mpa	2 Passage	1 passage Air
3 Texture of material	Aluminium alloy	4 Tracheal connector	G3/8"
5 Media type	Compressed air		

Electrical Specification

1 Rings	27	2 Current	Power module: 4 rings; 100A/ring
3 Voltage	0-380VDC/VAC		Signal module: 23 rings signal
4 Insulation Resistance	500M Ω @500VDC		
5 Electrical noise	Max.10m Ω ;		
6 Dielectric strength	500VAC@50Hz;60S		

Mechanical Specification

7 Speed	0~100RPM;	8 Torque	Max.0.5N.M;
9 Typical Life	10million revolutions, but strongly depends on your working conditions		

Environmental adaptability

10 Working temperature	-30 $^\circ$ C~+80 $^\circ$ C	11 Storage temperature	-35 $^\circ$ C~+85 $^\circ$ C
12 humidity	85 \pm 3%(30 $^\circ$ C+5 $^\circ$ C)		
13 Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times		
14 IP Class	IP51		

Material/Attachment

15 Contact Material	noble metal	16 Housing material	ALL Alloy
17 Lead wire	Rotor:300mm(See wiring diagram) Stator:300mm(See wiring diagram)		