



THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORISED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2020 RION TECHNOLOGY

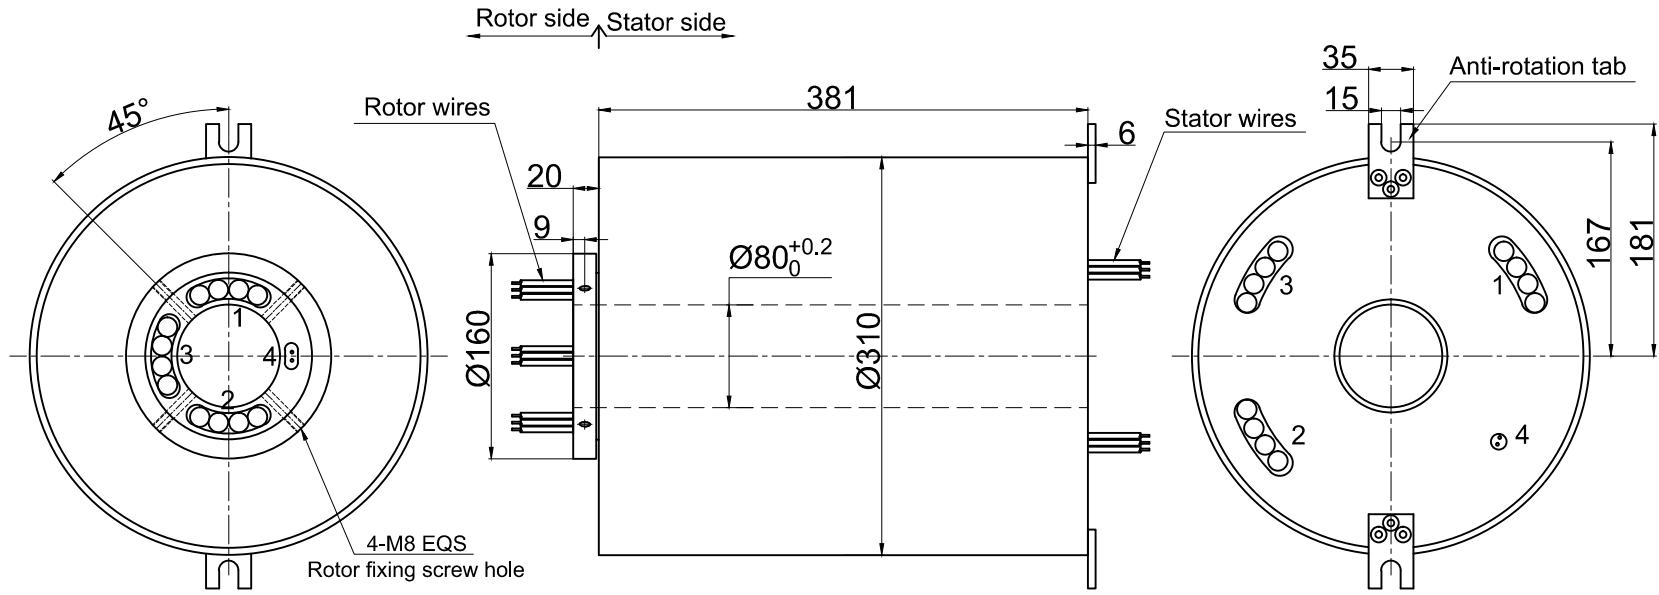

3 rings 350A
3*4-25mm² High voltage line (10KV) (4 line parallel for 350A)

2 rings signal
2-AWG18# Silicone thread

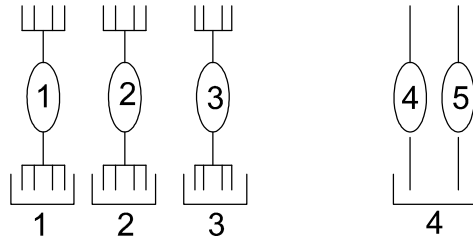

Electrical Specification			
1 Rings	5	2 Current	Power module:3 rings; 350A/ring Signal module:2 rings signal
3 Voltage	0-750VAC(Power) 0-300VAC(Signal)		
4 Insulation Resistance	1000MΩ@500VDC(Power) 500MΩ@500VDC(Signal)		
5 Electrical noise	Max.10mΩ;		
6 Dielectric strength	2500VAC@50Hz/3000(Power) 500VAC@50Hz/600(Signal)		
Mechanical Specification			
7 Speed	0~100RPM;	8 Torque	Max.0.5 N.M;
9 Typical Life	10million revolutions, but strongly depends on your working conditions		
Environmental adaptability			
10 Working temperature	-30℃~+80℃	11 Storage temperature	-35℃~+85℃
12 humidity	85±3%(30℃+5℃)		
13 Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times		
14 IP Class	IP54		
Material/Attachment			
15 Contact Material	noble metal	16 Housing material	ALL Alloy+Engineering plastic
17 Lead wire	Rotor:600mm(See wiring diagram) Stator:600mm(See wiring diagram)		

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		3 rings 350A + 2 rings signal	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR		MODEL		RX01120003	
2.MATERIAL & FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		DECIMAL		X±.1 XX±.03 XXX±.005	
FILLETS R.015		FINISH		✓	
THIRD ANGLE PROJECTION		FRACTIONAL		1/16	
ANGULAR±1°		RION		SIZE A	
		R.E.V.		A / 0	
		SCALE		1:1	
		UNIT		mm	