



THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.  
COPY RIGHT@2020 RION TECHNOLOGY

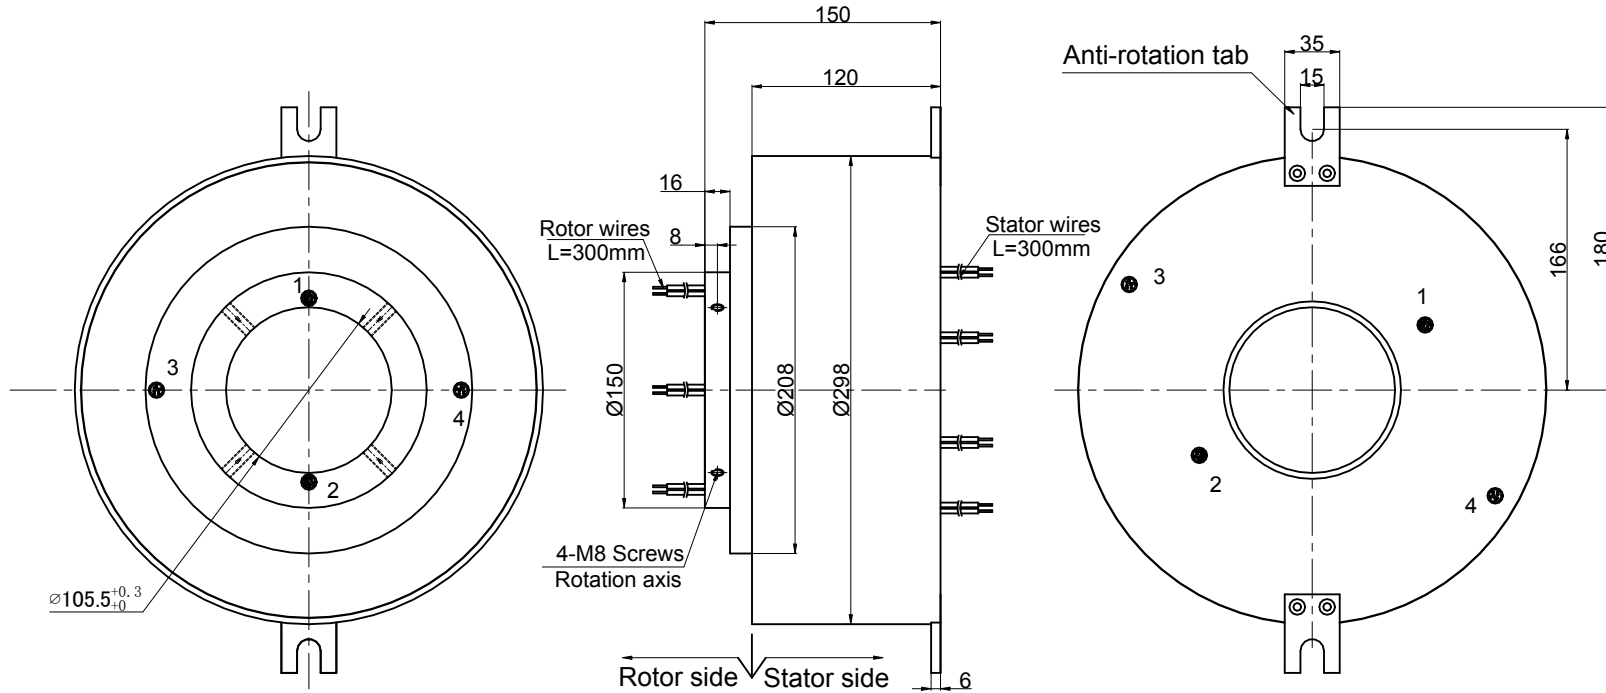

Electrical Specification			
1 Rings	40	2 Current	Signal module:40 rings signal
3 Voltage	0-300VDC/VAC		
4 Insulation Resistance	500MΩ@600VDC		
5 Electrical noise	Max.10mΩ;		
6 Dielectric strength	800VAC@50Hz;60S		

Mechanical Specification			
7 Speed	0~300RPM;	8 Torque	Max.0.2 N.M;
9 Typical Life	10million revolutions, but strongly depends on your working conditions		

Environmental adaptability			
10 Working temperature	30 ℃~+80 ℃	11 Storage temperature	-35 ℃~+85 ℃
12 humidity	85±3%(30 ℃±5 ℃)		
13 Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times		
14 IP Class	IP51		

Material/Attachment			
15 Contact Material	noble metal	16 Housing material	AL Alloy
17 Lead wire	Rotor:(See wiring diagram) Stator:(See wiring diagram)		

UNLESS OTHERWISE SPECIFIED		40 rings signal	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		TOLERANCES (EXCEPT AS NOTED)	
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		MODEL	RX01218005
FILLET R.015	FINISH	DECIMAL	Xs.1 XXs.03 XXXs.005
THIRD ANGLE PROJECTION		RION	
ANGULAR±1°		SIZE	A
		R.E.V.	A/0
		SCALE	1:1
		UNIT	mm