



THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2020 RION TECHNOLOGY

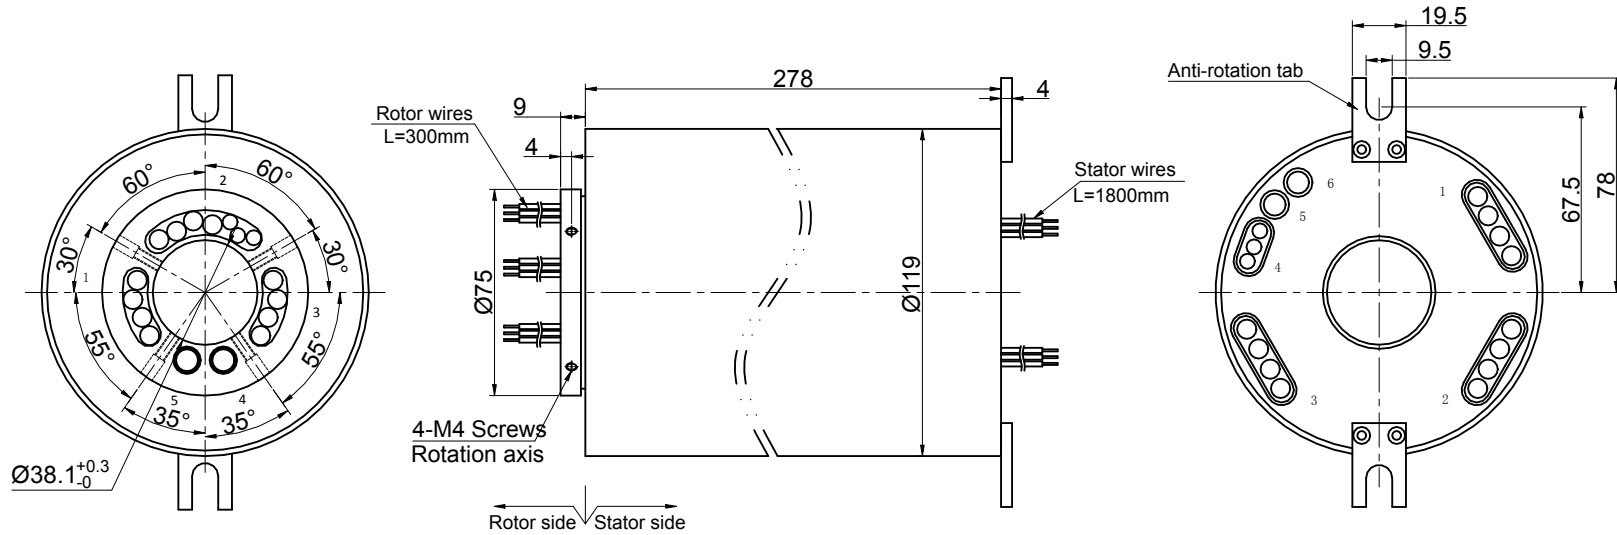

10² Sheathed silicone cable:Diameter $\varnothing 7$
6² Sheathed silicone cable:Diameter $\varnothing 5.5$

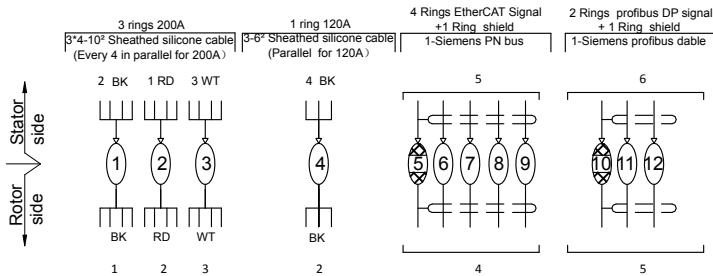

Electrical Specification			
1 Rings	12	2 Current	Power module: 3 rings; 200A/ring + 1 ring; 120A/ring Signal module: 6 rings signal + 2 rings shield
3 Voltage	0-480VDC/VAC		
4 Insulation Resistance	1000M Ω @800VDC		
5 Electrical noise	Max.5m Ω ;		
6 Dielectric strength	1000VAC@50Hz;60S		
Mechanical Specification			
7 Speed	0~250RPM;	8 Torque	Max.0.2 N.M;
9 Typical Life	20million revolutions, but strongly depends on your working conditions		
Environmental adaptability			
10 Working temperature	30 $^{\circ}$ C~+80 $^{\circ}$ C	11 Storage temperature	-35 $^{\circ}$ C~+85 $^{\circ}$ C
12 humidity	85 \pm 3%(30 $^{\circ}$ C+5 $^{\circ}$ C)		
13 Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times		
14 IP Class	IP51		
Material/Attachment			
15 Contact Material	noble metal	16 Housing material	AL Alloy
17 Lead wire	Rotor:(See wiring diagram) Stator:(See wiring diagram)		

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		3 rings 200A+ 1 ring 120A + 6 rings signal + 2 rings shield	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		DECIMAL Xs.1 XXs.03 XXXs.005		MODEL RX01223003	
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		FRACTIONAL \pm 1/16 ANGULAR \pm 1 $^{\circ}$			
FILLET R.015	FINISH \checkmark	SIZE	A	RE.V.	A/0
THIRD ANGLE PROJECTION		SCALE	1:1	UNIT	mm