

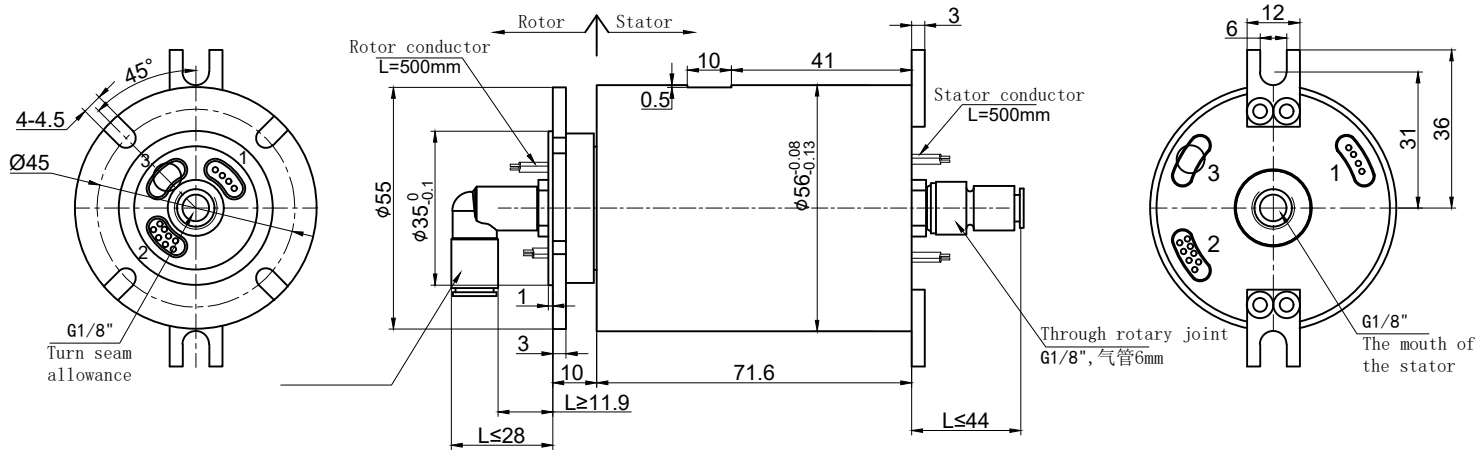


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.  
COPY RIGHT@2023 RION TECHNOLOGY

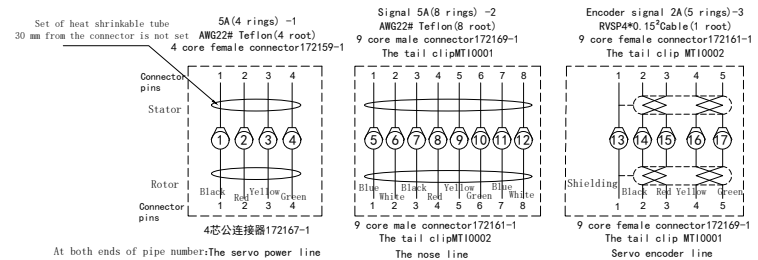

gas slip ring parameters

Channel:	1 road gas
Medium:	compressed air
Pressure:	0.8MPA
Specifications:	G1/8"

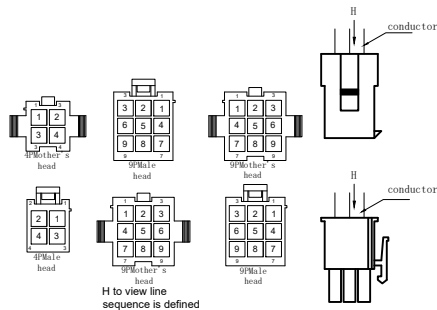

For note:	1 channel gas+4 rings 5A+13 rings Signal		
Ring the number:	18	Dynamic resistance:	Max. 10m $\Omega$
Working voltage:	0-380VAC/VDC	Work speed:	0-350 RPM
Dielectric strength:	500M $\Omega$ @500VDC	Protection grade:	IP51
Compressive strength:	500VAC@50HZ:60S	Working temperature:	-30 $^{\circ}$ C + 80 $^{\circ}$ C
		Storage temperature:	-35 $^{\circ}$ C + 85 $^{\circ}$ C
Contact materials:	Precious metals	Torsional force :	1 N.m
Install the aperture:	0	Spindle materials:	Aluminum alloy
Shell material:	Aluminum alloy +Engineering plastics		

UNLESS OTHERWISE SPECIFIED		Slip ring shape figure	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR		MODEL	RAPH100-02-G0803-P0405-S13
2.MATERIAL & FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		DECIMAL	X $\pm$ .1 XX $\pm$ .03 XXX $\pm$ .005
FILLET R.015	FINISH	FRACTIONAL	1/16
THIRD ANGLE PROJECTION		ANGULAR	$\pm$ 1 $^{\circ}$
DWG.NO	FSD	DATE	2022-11-09
SIZE	A	SCALE	1:1
UNIT	mm		

