
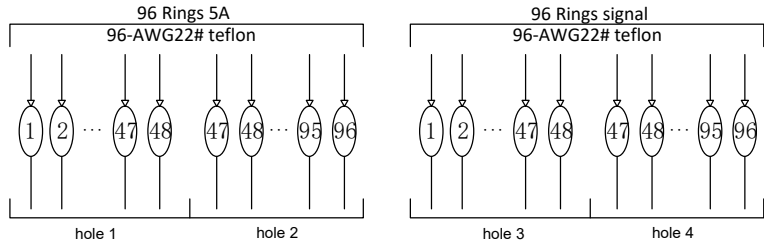


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2023 RION TECHNOLOGY

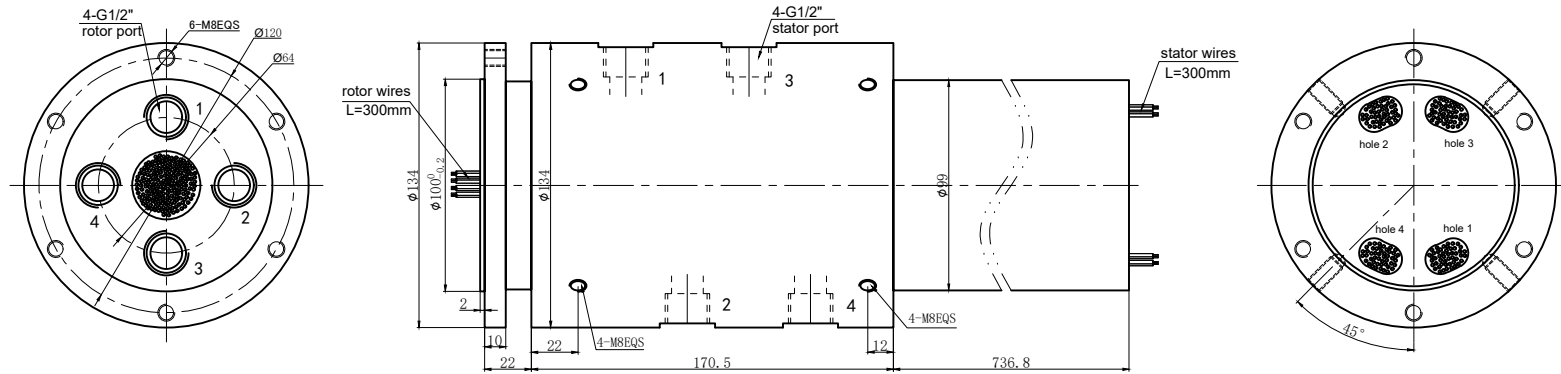

Electrical Specification

1	Rings	192	2	Current	Power module: 96 ring;5A/ring Signal module: 96 ring;5A/ring
2	Voltage	0-380VDC/VAC			
3	Insulation Resistance	500MΩ@500VDC			
4	Electrical noise	Max.10mΩ;			
5	Dielectric strength	500VAC@50Hz;60S			

Mechanical Specification

6	Speed	0~20RPM;	7	Torque	Max.10 N.M;
---	-------	----------	---	--------	-------------

Environmental adaptability

8	Working temperature	-30℃~+80℃	9	Storage temperature	-35℃~+85℃
10	humidity	85±3%(30℃+5℃)			
11	Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times			
12	IP Class	IP51			

Material/Attachment

13	Contact Material	noble metal	14	Housing material	Al Alloy
15	Lead wire	Rotor:(See wiring diagram) Stator:(See wiring diagram)			

Rotary joints:	The road:	4 passages air
	Channel pressure:	7KG
	Quality interface:	air
	Working Speed:	0-20rpm
	Working Temperature:	-30℃ + 80℃
	Housing Material:	AL Alloy
	Axles Material:	AL Alloy

<p>UNLESS OTHERWISE SPECIFIED</p> <p>1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR</p> <p>2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT</p> <p>FILLETS R.015 FINISH <input checked="" type="checkbox"/></p> <p>THIRD ANGLE PROJECTION </p>	<p>TOLERANCES (EXCEPT AS NOTED)</p> <p>0.5-6±0.1</p> <p>6-30±0.2</p> <p>30-120±0.3</p> <p>120-100±0.5</p> <p>100-1000±0.8</p> <p>1000-2000±1.2</p>	<p>4 passages air</p> <p>+96 rings 5A Power+96 rings signal</p>				
		MODEL	RAPH400-05-P9605-S96-VD			
				SIZE	A	
		<p>ANGULARS:1*</p>		RE V.	A / 0	
DWG.NO	CBH	DATE	2023-03-30	UNIT	mm	
		SCALE	1:1			