


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.  
COPY RIGHT@2023 RION TECHNOLOGY

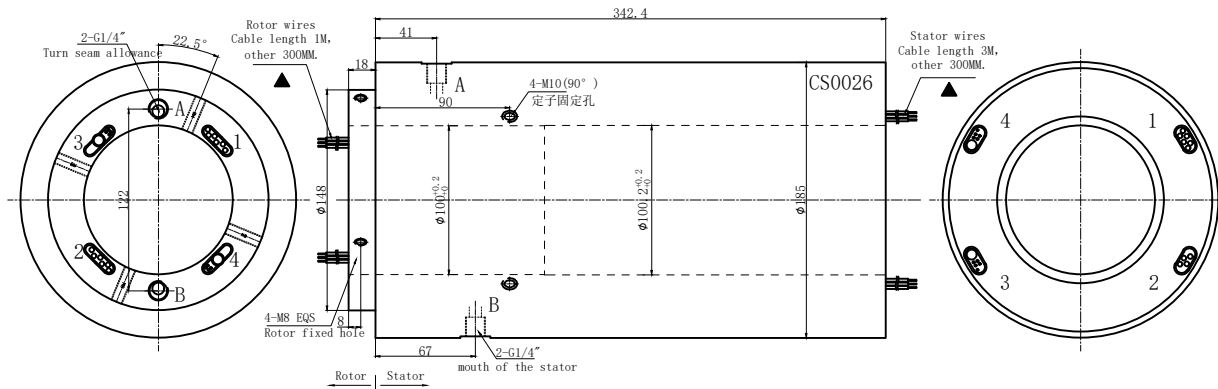


2 Channel	G1/4 "
Pressure	Air pressure ≤ 1 Mpa
Torsion	T ≤ 15N.M
Medium type	compressed air
Maximum speed	10 RPM
Temperature	-20° C ~ + 80° C
Material	ALL Alloy

1 Rings	33	2 Current	Power module: 5 rings, 40A/ring Signal module: 10 rings signal+ 2 channel 1000M Ethernet
2 Voltage	0-380VAC/VDC		
3 Insulation Resistance	800MΩ@500VDC		
4 Electrical noise	Max.10mΩ;		
5 Dielectric strength	1000VAC@50Hz;60S		

6 Speed	0~10RPM;	7 Torque	Max.15 N.M;
---------	----------	----------	-------------

9 Working temperature	-20°C~+80°C	10 Storage temperature	-20°C~+80°C
11 humidity	85±3%(30°C+5°C)		
12 Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times		
13 IP Class	IP51		

14 Contact Material	noble metal	15 Housing material	ALL Alloy
16 Lead wire	Rotor: (See wiring diagram) Stator: (See wiring diagram)		

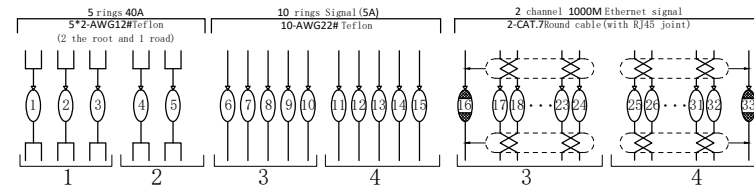

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		5 rings 40A+10 rings signal+ 2 channel 1000M Ethernet	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR		DECIMAL Xs.1 XX±.03 XXX±.005		MODEL REPH200-03-P0540-S10-2E-ID100	
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		FILLETS R.015 FINISH		RION	
THIRD ANGLE PROJECTION		FRACTIONAL±1/16 ANGULAR±1°		SIZE A	
DWG.NO		FSD		DATE 2022-11-09	
				R E V. A / 0	
				SCALE 1:1	
				UNIT mm	