

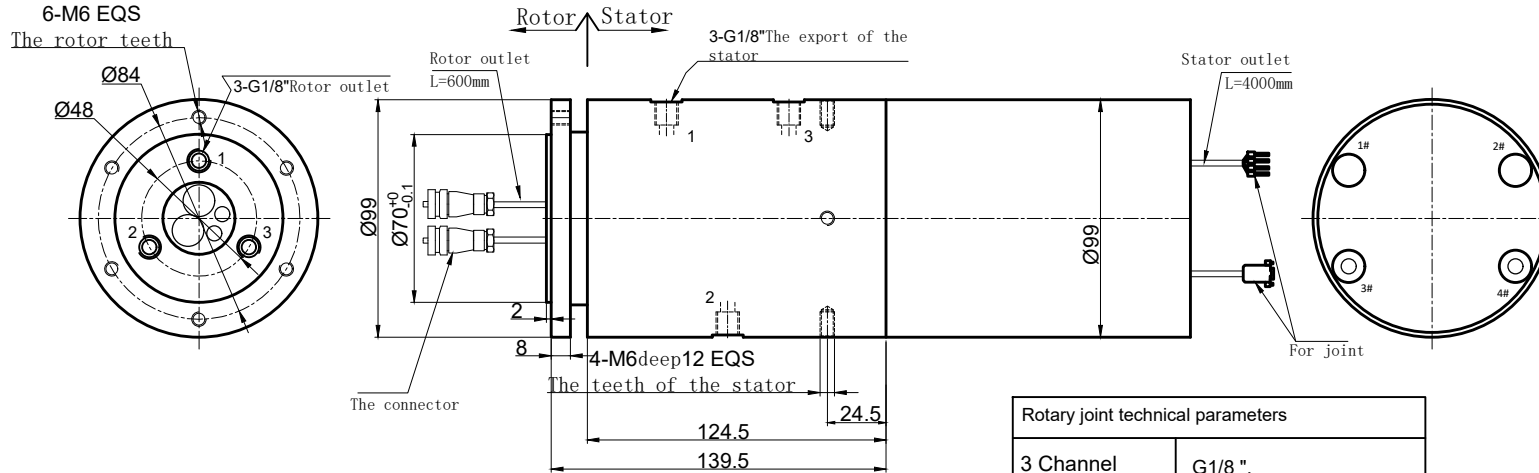


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2023 RION TECHNOLOGY

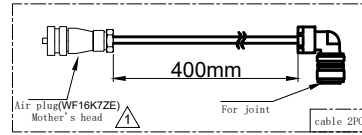

Rotary joint technical parameters	
3 Channel	G1/8 "
Pressure	Air pressure 1 Mpa
Torsion	T≤2.0N.M
Medium type	compressed air
Maximum speed	0-30 RPM
Temperature	-30° C ~+ 80° C
Material	ALL Alloy

Electrical Specification			
1 Rings	24	2 Current	Power module:8 rings ,25A/ring Signal module: 2 rings PE+14 rings Signal
2 Voltage	0-380VAC/VDC		
3 Insulation Resistance	500MΩ@500VDC		
4 Electrical noise	Max.5mΩ;		
5 Dielectric strength	800VAC@50Hz;60S		
Mechanical Specification			
6 Speed	0~30RPM;	7 Torque	Max.2 N.M;
Environmental adaptability			
9 Working temperature	-30℃~+80℃	10 Storage temperature	-30 ~+80
11 humidity	85±3%(30℃+5℃)		
12 Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times		
13 IP Class	IP51		
Material/Attachment			
14 Contact Material	noble metal	15 Housing material	ALL Alloy
16 Lead wire	Rotor: (See wiring diagram) Stator: (See wiring diagram)		

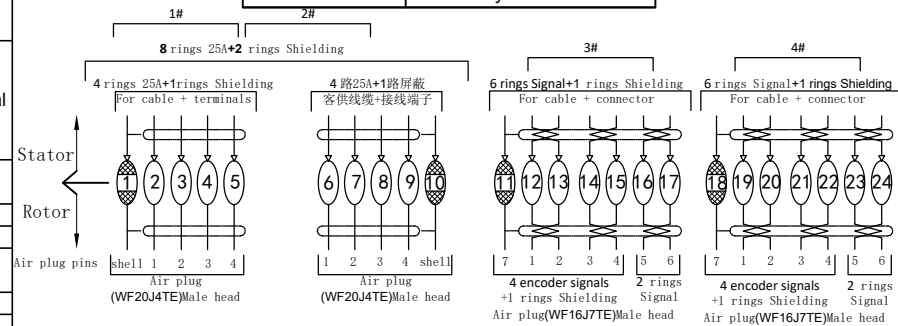

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		3 channel gas+8 rings 25A +2 rings PE+14 rings Signal	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		DECIMAL X±.1		MODEL	
2.MATERIAL &FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		XX±.03		REPH300-02-P0825-02PE-S14	
FILLETS R.015		XXX±.005			
FINISH		FRACTIONAL±1/16			
THIRD ANGLE PROJECTION		ANGULAR±1°		R E V.	A / 0
				SCALE	1:1
DWG.NO	FSD	DATE	2022-11-09	UNIT	mm