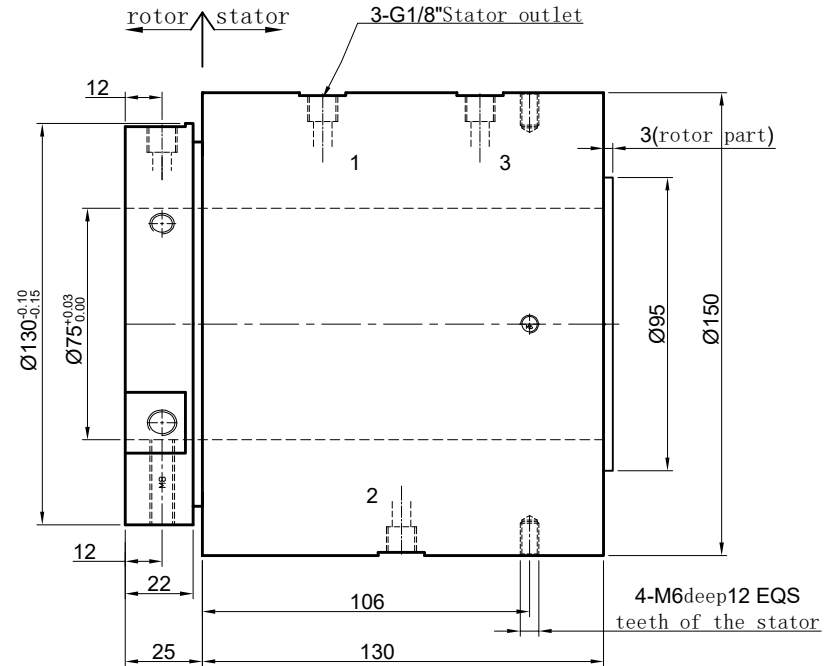
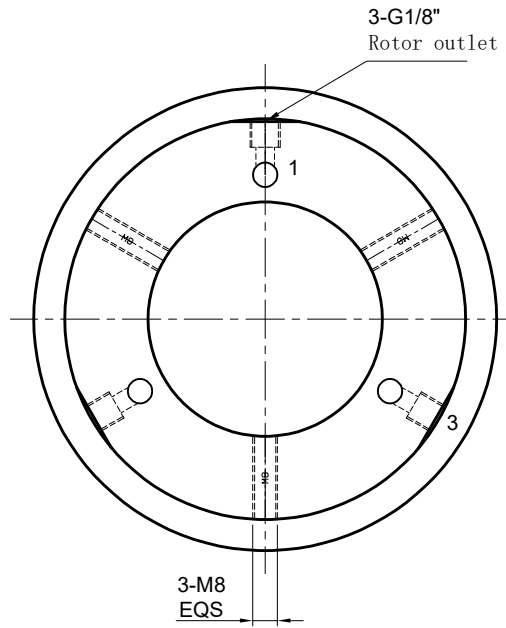





THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.  
COPY RIGHT@2020 RION TECHNOLOGY



### Rotary joint technical parameters

3 Channel	G1/8 "
Maximum speed	0-30 RPM
Pressure	Air pressure 1 Mpa
Torsion	$T \leq 10N \cdot M$
Temperature	-30°C ~+ 80°C
Medium type	compressed air
Material	Aluminum alloy

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		3 channel gas	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		DECIMAL X±.1		MODEL	
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		XX±.03		REPH300-02	
FILLETS R.015		XXX±.005			
FINISH $\sqrt{\text{V}}$		FRACTIONAL±1/16			
THIRD ANGLE PROJECTION		ANGULAR±1°		R E V.	A / 0
				SCALE	1:1
DWG.NO	FSD	DATE	2022-11-09	UNIT	mm