


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2023 RION TECHNOLOGY

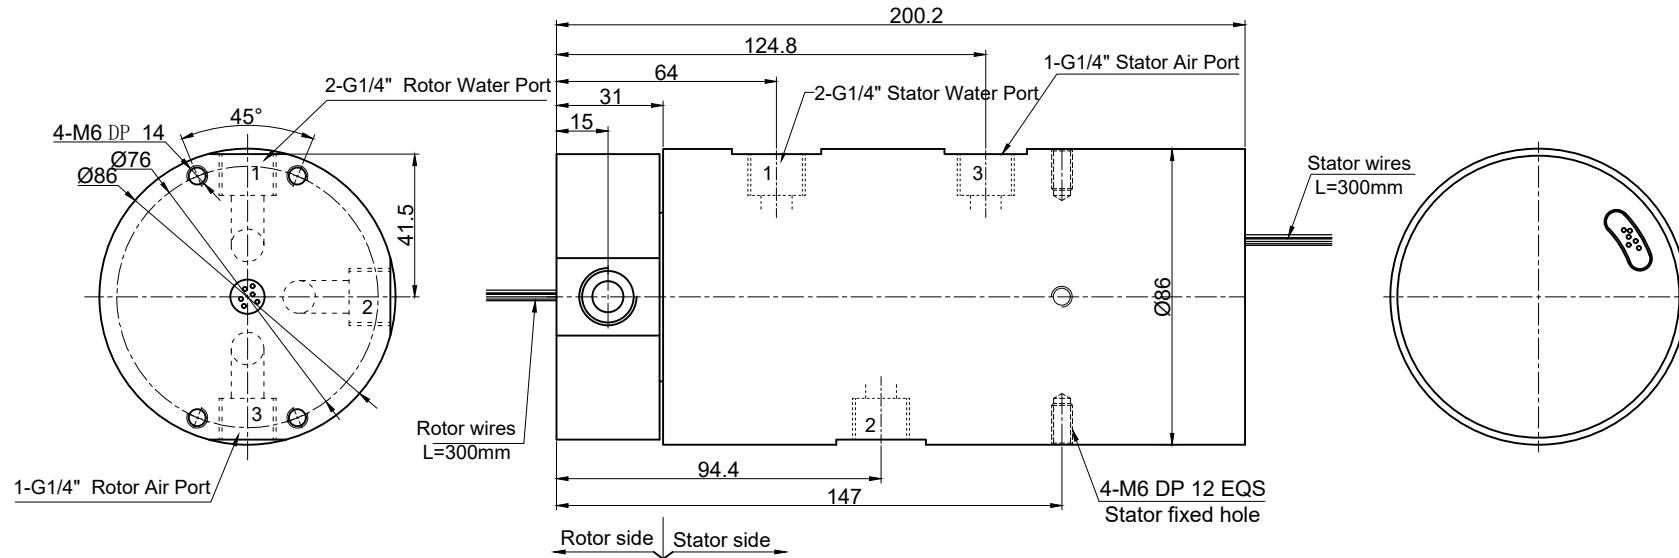

Electrical Specification

1	Rings	6	2	Current	Power module: 6rings 5A
3	Voltage	0-380VDC/VAC			
4	Insulation Resistance	500MΩ@500VDC			
5	Electrical noise	Max.10mΩ;			
6	Dielectric strength	500VAC@50HZ;60S;			

Mechanical Specification

7	Speed	0~100RPM;	8	Torque	Max.10 N.M;
9	Life	Typical: 20million revolutions, but strongly depends on your working conditions			

Environmental adaptability


10	Working temperature	-30℃~+80℃	11	Storage temperature	-35 ~+85
12	humidity	85±3%(30 +5)			
14	Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times			
15	IP Class	IP51			

Material/Attachment

16	Contact Material	Precious metal	17	Housing material	AL Alloy+engineering plastic
18	Lead wire	Rotor:(See wiring diagram) Stator:(See wiring diagram)			

rotary joints specifications

Passage	2 passage wdter+1 passage Gas
Channel pressure	10bar
Working speed	0-100RPM
Working Temperature	-30℃-80℃
Medium Type	compressed air / water



UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		6rings 5A	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR		2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		MODEL	
FILLETS R.015		FINISH		REPH300-03-P0605	
THIRD ANGLE PROJECTION		FRACTIONAL±1/16		RION	
ANGULAR±1°		ANGULAR±1°		SIZE A	
DWG.NO		LJ		DATE 2022/10/10	
UNIT		mm		SCALE 1:1	