
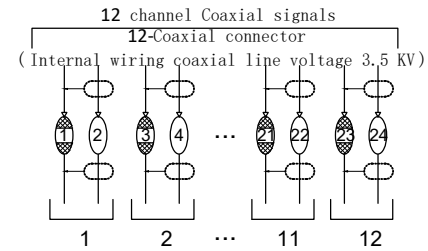


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.  
COPY RIGHT@2023 RION TECHNOLOGY

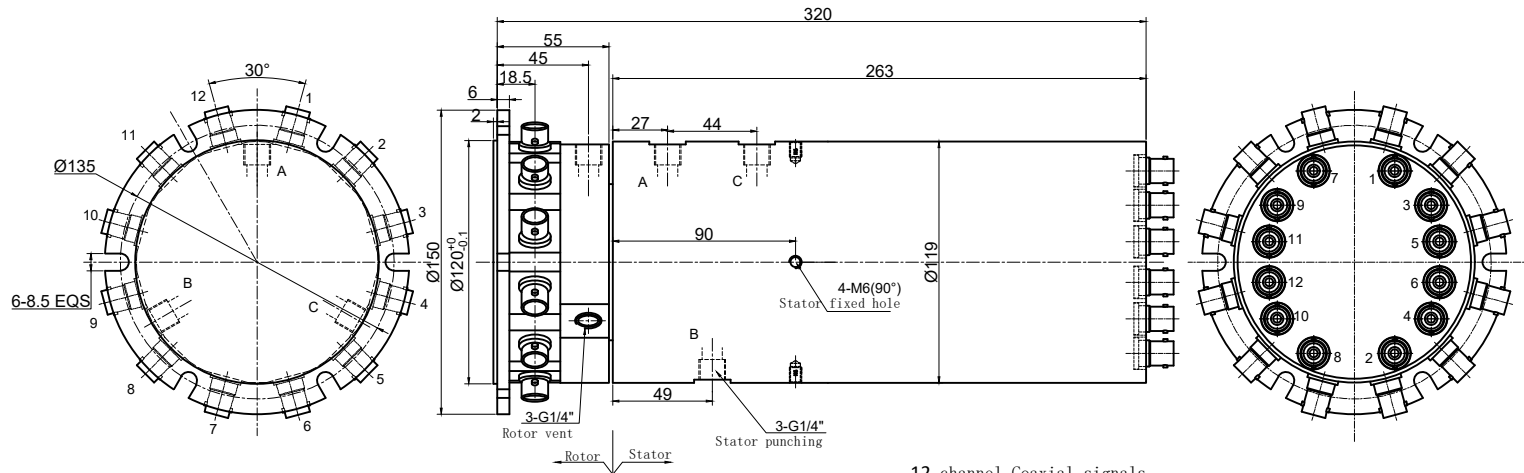

### Electrical Specification

1	Rings	24	2	Current	Signal module: 12 channel Coaxial signals
2	Voltage	0-700VAC			
3	Insulation Resistance	800MΩ@600VDC			
4	Electrical noise	Max.10mΩ;			
5	Dielectric strength	3500VAC@3000Hz;60S			

### Mechanical Specification

6	Speed	0~100RPM;	7	Torque	Max.5 N.M;
---	-------	-----------	---	--------	------------

### Environmental adaptability

9	Working temperature	-20℃~+80℃	10	Storage temperature	-20 ~+80
11	humidity	85±3%(30℃+5℃)			
12	Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times			
13	IP Class	IP51			

### Material/Attachment

14	Contact Material	noble metal	15	Housing material	ALL Alloy+ engineering plastics
16	Lead wire	Rotor: (See wiring diagram) Stator: (See wiring diagram)			

Rotary joint technical parameters	
3 Channel	Tracheal joint G1/4 "
Pressure	< 1 Mpa
Torsion	<5. ON. M
Medium type	compressed air
Maximum speed	0-100 RPM
Temperature	-20° C ~+ 80° C
Material	ALL Alloy

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		12 channel Coaxial signals	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		DECIMAL X±.1		MODEL	
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		XX±.03		REPH300-03-S24-HV	
FILLETS R.015		XXX±.005		SIZE	
FINISH ✓		FRACTIONAL±1/16		R E V.	
THIRD ANGLE PROJECTION		ANGULAR±1°		A / 0	
DWG.NO		FSD		SCALE	
DATE		2022-11-09		1:1	
UNIT		mm			

