



THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2023 RION TECHNOLOGY

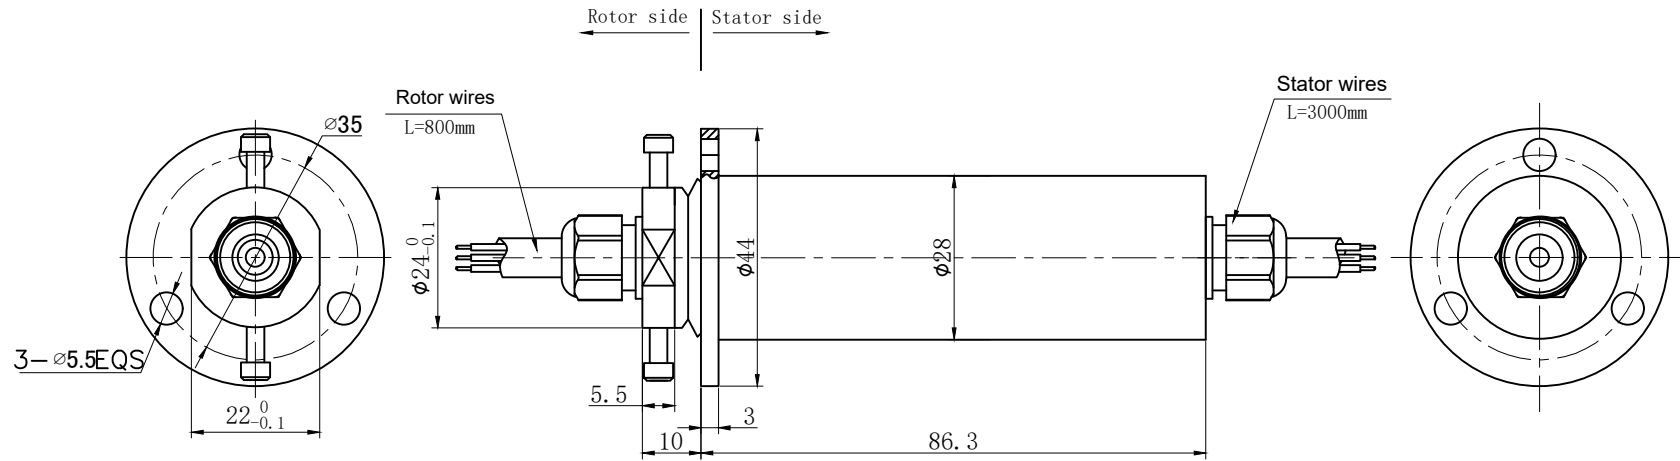

Electrical Specification

1	Rings	3	2	Current	Signal module:3 rings signal
2	Voltage	0-240VDC/VAC			
3	Insulation Resistance	200MΩ@240VDC			
4	Electrical noise	Max.10mΩ;			
5	Dielectric strength	200VAC@50Hz;60S			

Mechanical Specification

6	Speed	0~366RPM;	7	Torque	Max.1.5 N.M;
---	-------	-----------	---	--------	--------------

Environmental adaptability

8	Working temperature	-30℃~+80℃	9	Storage temperature	-35℃~+85℃
10	humidity	85±3%(30℃+5℃)			
11	Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times			
12	IP Class	IP68 Explosion Proof			

Material/Attachment

13	Contact Material	noble metal	14	Housing material	Stainless steel
15	Lead wire	Rotor:(See wiring diagram) Stator:(See wiring diagram)			

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		3 rings signal					
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR		DECIMAL X±1		MODEL	RFS028-S03-EX-GV2				
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		XX±.03			SIZE	A			
FILLETS R.015 FINISH ✓		XXX±.005			RE V.	A / 0			
THIRD ANGLE PROJECTION		FRACTIONAL±1/16		SCALE	1:1				
		ANGULAR±1°		DWG.NO	CBH	DATE	2021-12-09	UNIT	mm