



THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2023 RION TECHNOLOGY

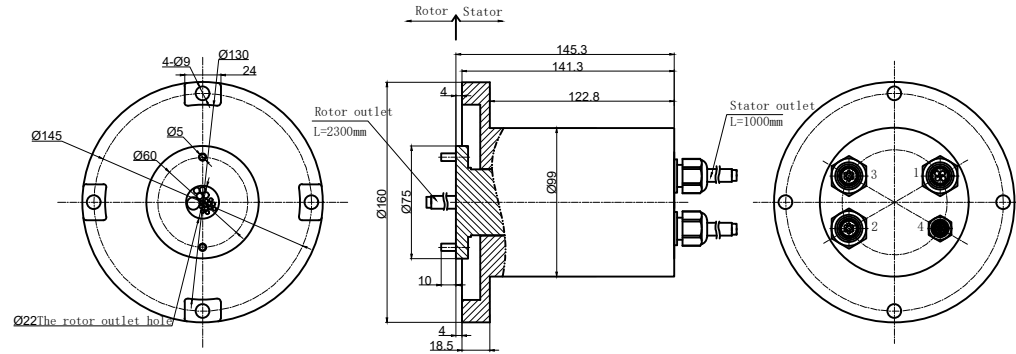

80(Set of heat shrinkable tube, prevent the corrugated pipe and line string)

Molding outer diameter:Ø23
(If the line is difficult to wear, corrugated pipe can be cut package combined heat shrinkable tube)



Pay attention to: 2.Set of the corrugated tube rotor and stator.
Corrugated pipe distance plug-in distance of about 150 mm.



DT series connection

Pay attention to: 1.Rotor side tube and pressure welding wire according to the requirements set number pin; Plug shell, CARDS, sealed plugging don't pressure welding, the use of plastic bags
Separate packing around the rotor side wires along with the goods send ration on the client.

Electrical Specification

1	Rings	19	2	Current	Power module:4 rings ,25A/ring +12路10A Signal module: 1-Canbus Signal
2	Voltage	0-440VAC/VDC			
3	Insulation Resistance	1000MΩ@500VDC			
4	Electrical noise	Max.10mΩ;			
5	Dielectric strength	1000VAC@50Hz;60S			

Mechanical Specification


6	Speed	0~250RPM;	7	Torque	Max.2 N.M;
---	-------	-----------	---	--------	------------

Environmental adaptability

9	Working temperature	-30℃~+80℃	10	Storage temperature	-30 ~+80
11	humidity	85±3%(30℃+5℃)			
12	Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times			
13	IP Class	IP67			

Material/Attachment

14	Contact Material	noble metal	15	Housing material	ALL Alloy
16	Lead wire	Rotor: (See wiring diagram) Stator: (See wiring diagram)			

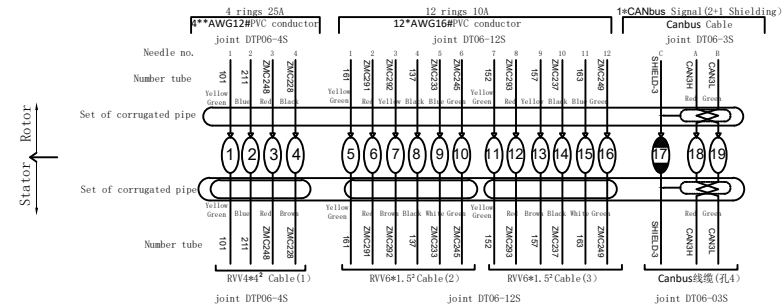

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		4 rings 25A+12 rings 10A+1-Canbus Signal					
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		DECIMAL X±.1		MODEL	RG099-P0425-P1210-S03-IP67-CE-V01				
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		XX±.03			SIZE	A			
FILLETS R.015		XXX±.005			RE.V.	A / 0			
THIRD ANGLE PROJECTION		FRACTIONAL±1/16		SCALE	1:1				
		ANGULAR±1°		DWG.NO	FSD	DATE	2022-11-09	UNIT	mm