


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.  
COPY RIGHT@2023 RION TECHNOLOGY

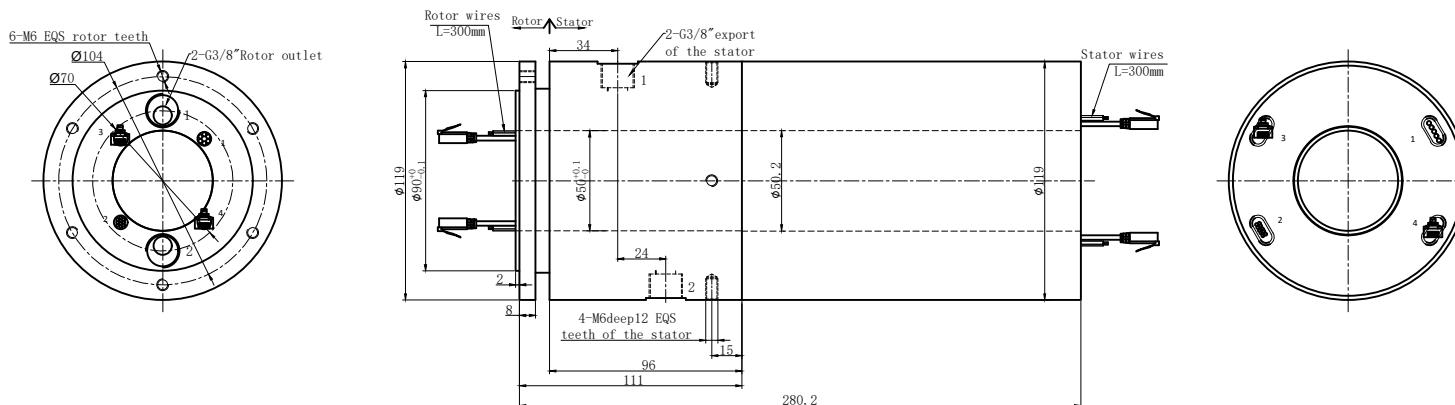

2 Channel	Tracheal joint G3/8 "
Pressure	Air pressure 1 Mpa
Torsion	T≤5.0N.M
Medium type	compressed air
Maximum speed	0-100 RPM
Temperature	-30° C ~+ 80° C
Material	ALL Alloy

### Electrical Specification

1 Rings	33	2	Current	Power module:5 rings ,10A/ring Signal module: 10 rings signal +2-1000M Ethernet signal
2 Voltage	0-380VAC/VDC			
3 Insulation Resistance	500MΩ@600VDC			
4 Electrical noise	Max.10mΩ;			
5 Dielectric strength	500VAC@50Hz;60S			

### Mechanical Specification


6 Speed	0~250RPM;	7 Torque	Max.5 N.M;
---------	-----------	----------	------------

### Environmental adaptability

9 Working temperature	-30℃~+80℃	10 Storage temperature	-30℃~+80℃
11 humidity	85±3%(30℃+5℃)		
12 Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times		
13 IP Class	IP51		

### Material/Attachment

14 Contact Material	noble matal	15 Housing material	ALL Alloy
16 Lead wire	Rotor: (See wiring diagram) Stator: (See wiring diagram)		

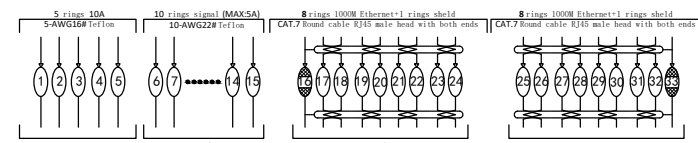

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		5 rings 10A+10 rings signal +2-1000M Ethernet signal	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR 2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		MODEL		RJ2050-P0510-S10-2E	
FILLETS R.015		FINISH			
THIRD ANGLE PROJECTION		FRACTIONAL±1/16			
ANGULAR±1°		DECIMAL X±.1 XX±.03 XXX±.005		RE V.	A / 0
DWG.NO		FSD	DATE	SCALE	1:1
			2022-11-09	UNIT	mm