


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.  
COPY RIGHT@2020 RION TECHNOLOGY

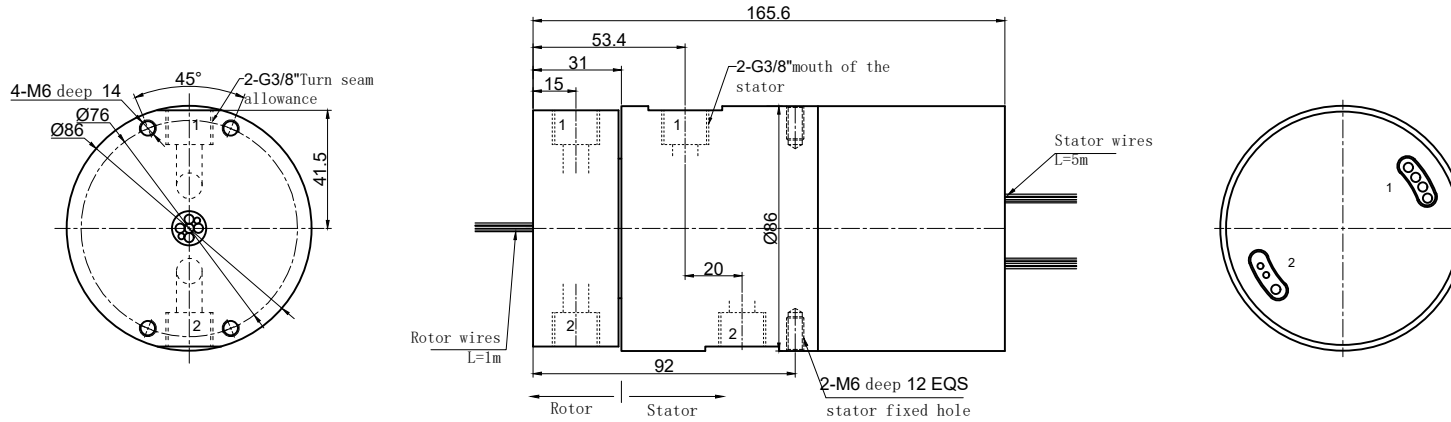

### Electrical Specification

1	Rings	5	2	Current	Power module:2 rings ,50A/ring+ 1 rings ,20A/ring Signal module: 2 rings 10A
2	Voltage	0-380VAC/VDC			
3	Insulation Resistance	500MΩ@500VDC			
4	Electrical noise	Max.10mΩ;			
5	Dielectric strength	500VAC@50Hz;60S			

### Mechanical Specification

6	Speed	0~150RPM;	7	Torque	Max.1 N.M;
---	-------	-----------	---	--------	------------


### Environmental adaptability

9	Working temperature	-30℃~+80℃	10	Storage temperature	-30 ~+80
11	humidity	85±3%(30℃+5℃)			
12	Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times			
13	IP Class	IP51			

### Material/Attachment

14	Contact Material	noble metal	15	Housing material	ALL Alloy+Engineering plastics
16	Lead wire	Rotor: (See wiring diagram) Stator: (See wiring diagram)			

Rotary joint technical parameters	
2 Channel	Tracheal joint G3/8 "
Pressure	Air pressure ≤1 Mpa
Torsion	T≤1 N. M
Medium type	compressed air
Maximum speed	0-150 RPM
Temperature	-30° C ~+ 80° C
Material	ALL Alloy

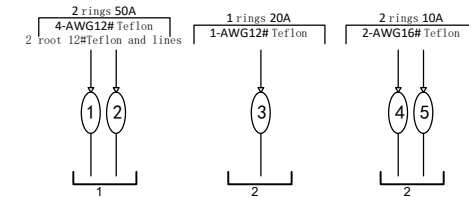

UNLESS OTHERWISE SPECIFIED 1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR 2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		TOLERANCES (EXCEPT AS NOTED) DECIMAL X±.1 XX±.03 XXX±.005		2 rings 50A+1 rings 20A+2 rings 10A	
FILLETS R.015 FINISH $\checkmark$		THIRD ANGLE PROJECTION		MODEL RK23-P0250-P0120-P0210	
		FRACTIONAL±1/16 ANGULAR±1°			
				SIZE	A
				RE V.	A / 0
				SCALE	1:1
DWG.NO	FSD	DATE	2022-11-09	UNIT	mm