
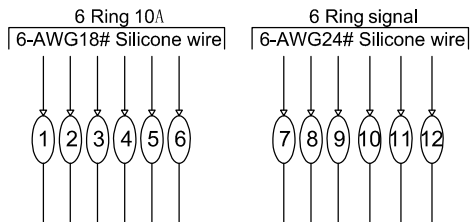
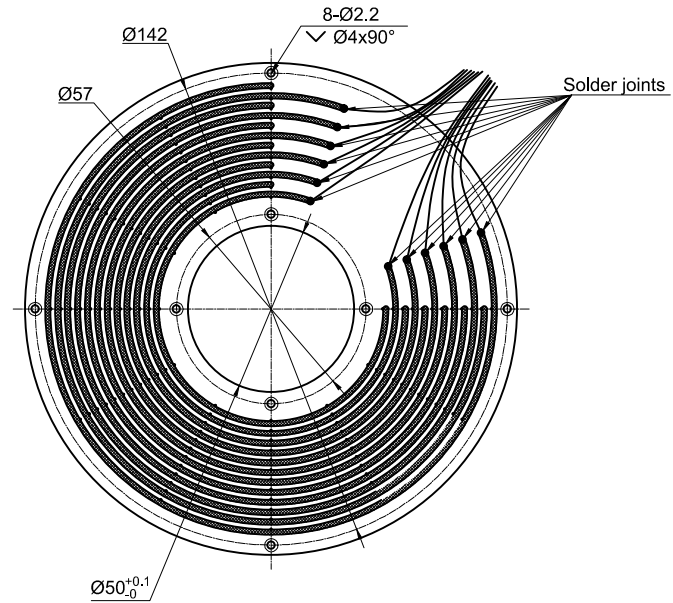


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2020 RION TECHNOLOGY

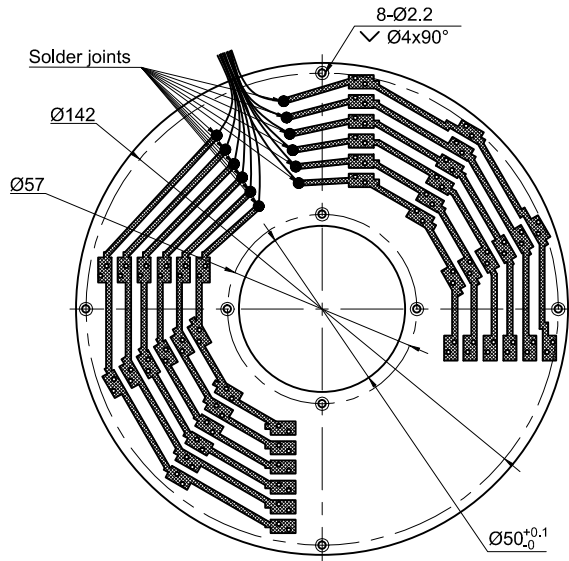

Electrical Parameter	Rating Voltage	0~300VDC/VAC
	Circuits & Current	6 rings 10A + 6 rings signal
	Dielectric Strength	≥500V@50Hz between each circuit
	Insulation Resistance	500MΩ@500VDC
	Electric Noise	Max 10mΩ@6VDC,50mA (Runing with 50rpm)
Mechanical Parameter	Inner Diameter	φ50
	Working Speed	0~250RPM
	Inner Material	PCB
Other	Contacting Material	Precious Metal
	Housing Material	PCB
Other	Protection (IP Grade)	IP40
	Working Temperature	-40°C+80°C

UNLESS OTHERWISE SPECIFIED		TOLERANCES EXCEPT AS NOTED		6 rings 10A + 6 rings signal	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		DECIMAL X±.1		MODEL RPCB050-P0610-S06	
2.MATERIAL &FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		XX±.03		SIZE A	
FILLETS R.015 FINISH ✓		XXX±.005		R E V. A / 0	
THIRD ANGLE PROJECTION		FRACTIONAL±1/16		SCALE 1:1	
ANGULAR±1°		UNIT mm		RION	