



THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2020 RION TECHNOLOGY

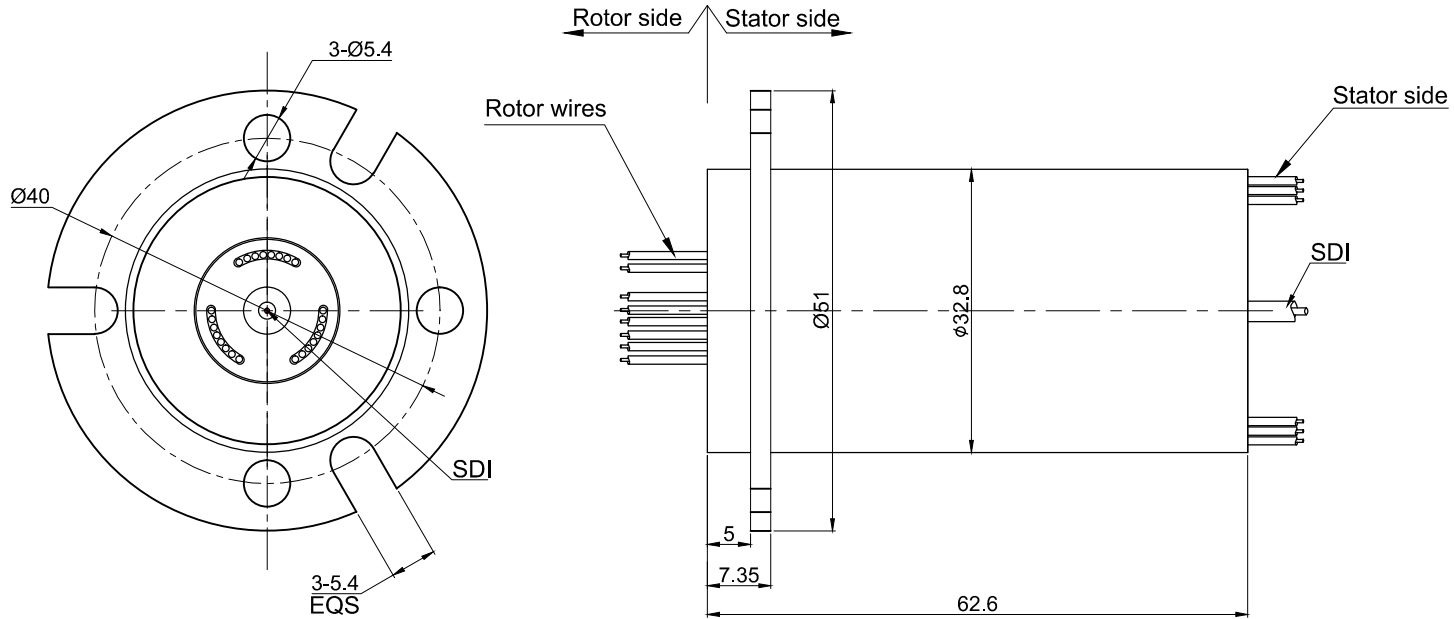

1 frequency	DC-15GHz	2 Insertion loss	0.3 dB /1GHz Max
3 Return Loss	-18 dB / 1GHz Max	4 Incorporation loss fluctuation	±0.03dB
5 Input and Output	RG-179	6 Voltage standing wave ratio	VSWR≤1.3
7 Maximum Speed	60RPM	8 Impedance	75 ohms
9 Voltage standing wave ratio fluctuation	1±0.05		
10 Rated current	Direct current MAX.1A		
11 Lead wire	Rotor:300mm Stator:300mm		

1. ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR 2. MATERIAL & FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT	TOLERANCES (EXCEPT AS NOTED)		24 rings signal	
	DECIMAL	X±.1 XX±.03 XXX±.005	MODEL	RSDI224
FILLETS R.015	FINISH		SIZE	A
THIRD ANGLE PROJECTION			R.E.V.	A / 0
		FRACTIONAL	SCALE	1:1
		ANGULAR	UNIT	mm

1 Rings	24	2 Current	Signal module:24 rings Signal ,2A
3 Voltage	0-220VDC/VAC		
4 Insulation Resistance	500MΩ@300VDC		
5 Electrical noise	Max.10mΩ;		
6 Dielectric strength	200VAC@50Hz;60S		

7 Speed	0~60RPM;	8 Torque	Max.0.2 N.M;
9 Life	Typical:10million revolutions, but strongly depends on your working conditions		

10 Working temperature	-40℃~+80℃	11 Storage temperature	-45℃~+85℃
12 humidity	85±3%(30℃+5℃)		
13 Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times		
14 IP Class	IP51		

15 Contact Material	Precious metal	16 Housing material	ALL Alloy+engineering plastic
17 Lead wire	Rotor:300mm(See wiring diagram) Stator:300mm(See wiring diagram)		