


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2023 RION TECHNOLOGY

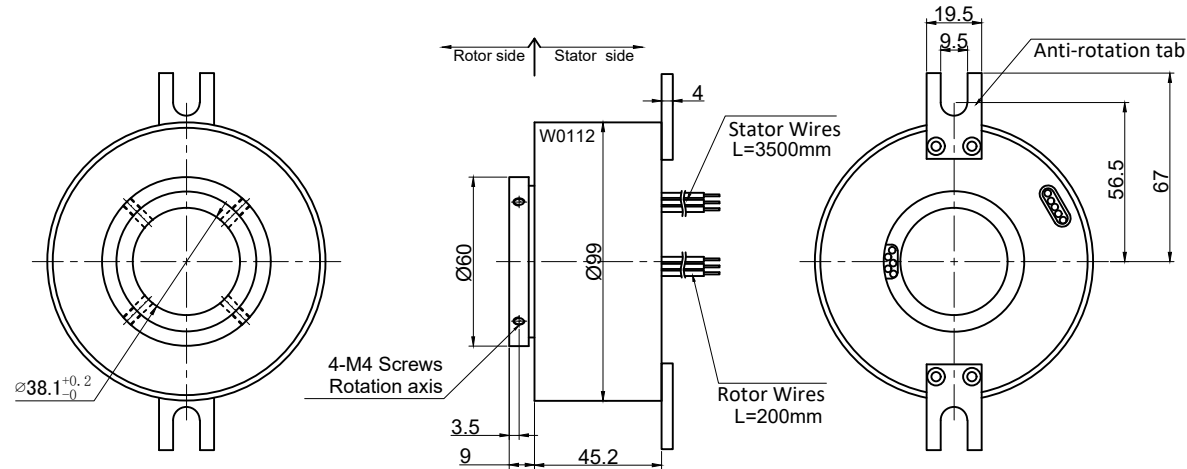

Electrical Specification

1	Rings	4	2	Current	Power module: 2 rings ,30A/ring Signal module: 2 rings Thermocouple signal
2	Voltage	0-380VAC/VDC			
3	Insulation Resistance	500MΩ@500VDC			
4	Electrical noise	Max.5mΩ;			
5	Dielectric strength	800VAC@50Hz;60S			

Mechanical Specification


6	Speed	0~250RPM;	7	Torque	Max.0.5 N.M;
---	-------	-----------	---	--------	--------------

Environmental adaptability

9	Working temperature	-30℃~+200℃	10	Storage temperature	-30 ~+200
11	humidity	85±3%(30℃+5℃)			
12	Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times			
13	IP Class	IP51			

Material/Attachment

14	Contact Material	noble metal	15	Housing material	ALL Alloy+Engineering plastics
16	Lead wire	Rotor: (See wiring diagram) Stator: (See wiring diagram)			

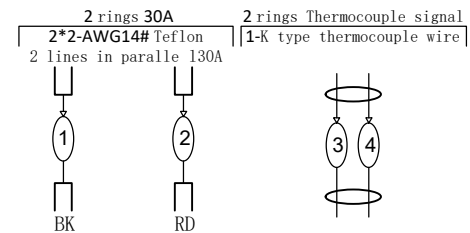

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		2 rings 30A+ 2 rings Thermocouple signal		
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		DECIMAL X±.1		MODEL	RT3899-P0230-S02-T200	
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		XX±.03			SIZE	A
FILLETS R.015		XXX±.005			R E V.	A / 0
FINISH <input checked="" type="checkbox"/>		FRACTIONAL±1/16		SCALE	1:1	
THIRD ANGLE PROJECTION		ANGULAR±1°		DWG.NO	FSD	DATE
						2022-11-09
				UNIT	mm	