



MARK	ECN NO.	Modify	Approve	DATE

THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2023 RION TECHNOLOGY

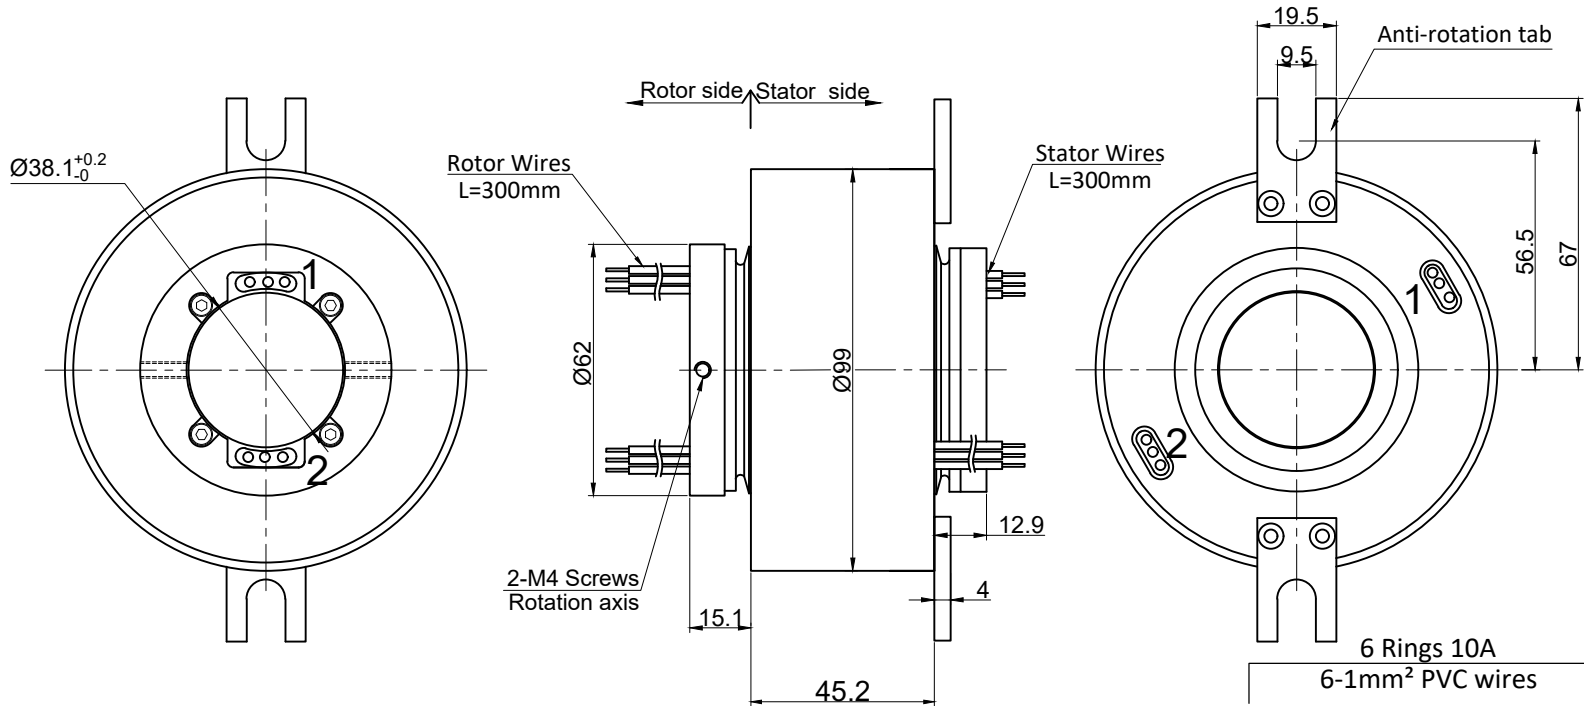

Electrical Specification						
1	Rings	6	2	Current	Power module: 6 ring 10A	
2	Voltage	0-380VDC/VAC				
3	Insulation Resistance	500MΩ@500VDC				
4	Electrical noise	Max.10mΩ;				
5	Dielectric strength	800VAC@50Hz;60S				
Mechanical Specification						
6	Speed	0~250RPM;		7	Torque	Max.2 N.M;
Environmental adaptability						
8	Working temperature	-30℃~+80℃		9	Storage temperature	-35 ~+85
10	humidity	85±3%(30 +5)				
11	Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times				
12	IP Class	IP65				
Material/Attachment						
13	Contact Material	precious metal	14	Housing material	Engineering plastic+Al Alloy	
15	Lead wire	Rotor:(See wiring diagram) Stator:(See wiring diagram)				



UNLESS OTHERWISE SPECIFIED		6 rings 10A Power	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		TOLERANCES (EXCEPT AS NOTED)	
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		MODEL	RT3899-P0610-IP65S
FILLETS R.015	FINISH \checkmark	SIZE	A
THIRD ANGLE PROJECTION		R E V.	A / 0
ANGULAR±1°		SCALE	1:1
DWG.NO	LJ	DATE	2023/05/09
UNIT	mm		