


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.  
COPY RIGHT@2023 RION TECHNOLOGY

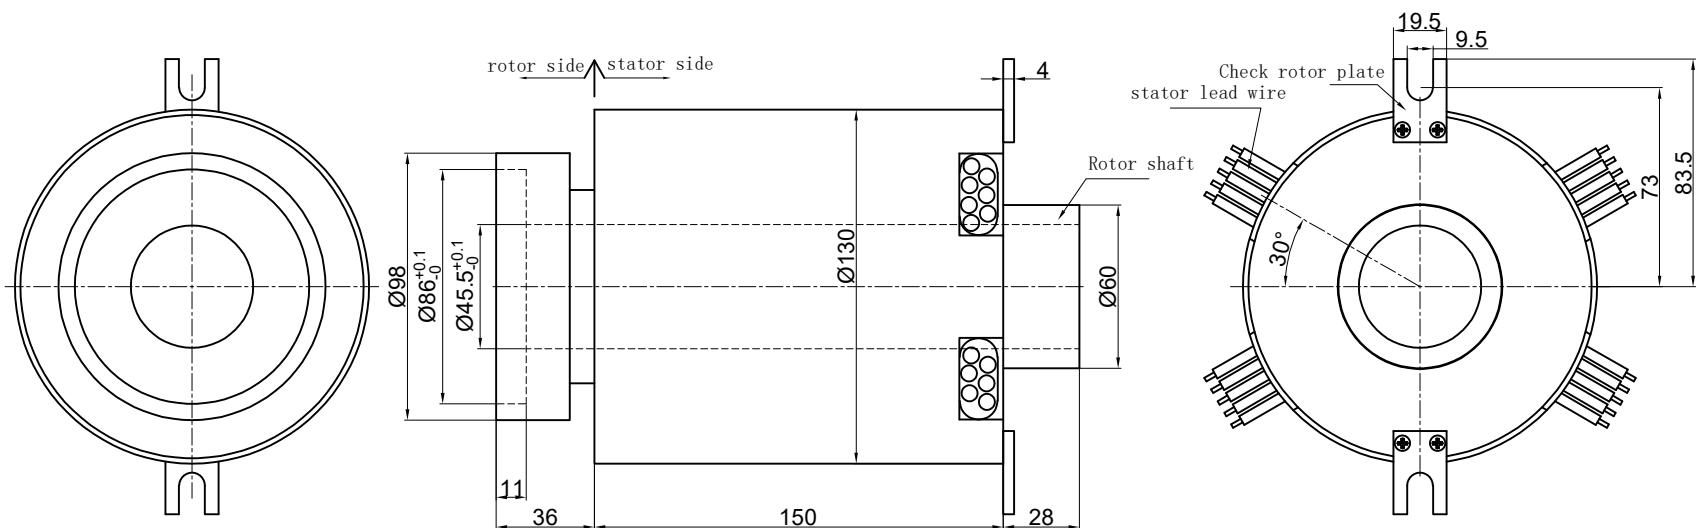

### Electrical Specification

1	Rings	1	2	Current	Power module:1 rings ,1500A/ring
2	Voltage	0-380VAC/VDC			
3	Insulation Resistance	500MΩ@500VDC			
4	Electrical noise	Max.10mΩ;			
5	Dielectric strength	500VAC@50Hz;60S			

### Mechanical Specification

6	Speed	0~250RPM;	7	Torque	Max.0.5 N.M;
---	-------	-----------	---	--------	--------------

### Environmental adaptability

9	Working temperature	-30℃~+80℃	10	Storage temperature	-30℃~+100℃
11	humidity	85±3%(30℃+5℃)			
12	Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times			
13	IP Class	IP51			

### Material/Attachment

14	Contact Material	noble matal	15	Housing material	Copper + aluminium alloy
16	Lead wire	Rotor: Rotor conductive(See wiring diagram) Stator: Stator line is 1000 mm long(See wiring diagram)			

1 ring 1500A  
26-PVC line FLRY-B-10<sup>2</sup> parallel



UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		1 RING 1500A					
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		DECIMAL X±.1		MODEL	RT45130-P011500				
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		XX±.03			SIZE	A			
FILLETS R.015		FINISH			XXX±.005	R E V.	A / 0		
THIRD ANGLE PROJECTION		FRACTIONAL±1/16			SCALE	1:1			
		ANGULAR±1°			DWG.NO	FSD	DATE	2022-11-09	UNIT