
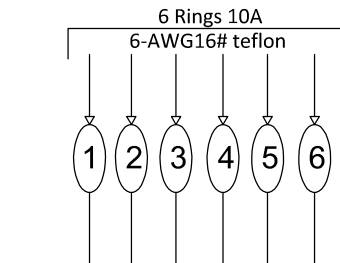


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2020 RION TECHNOLOGY

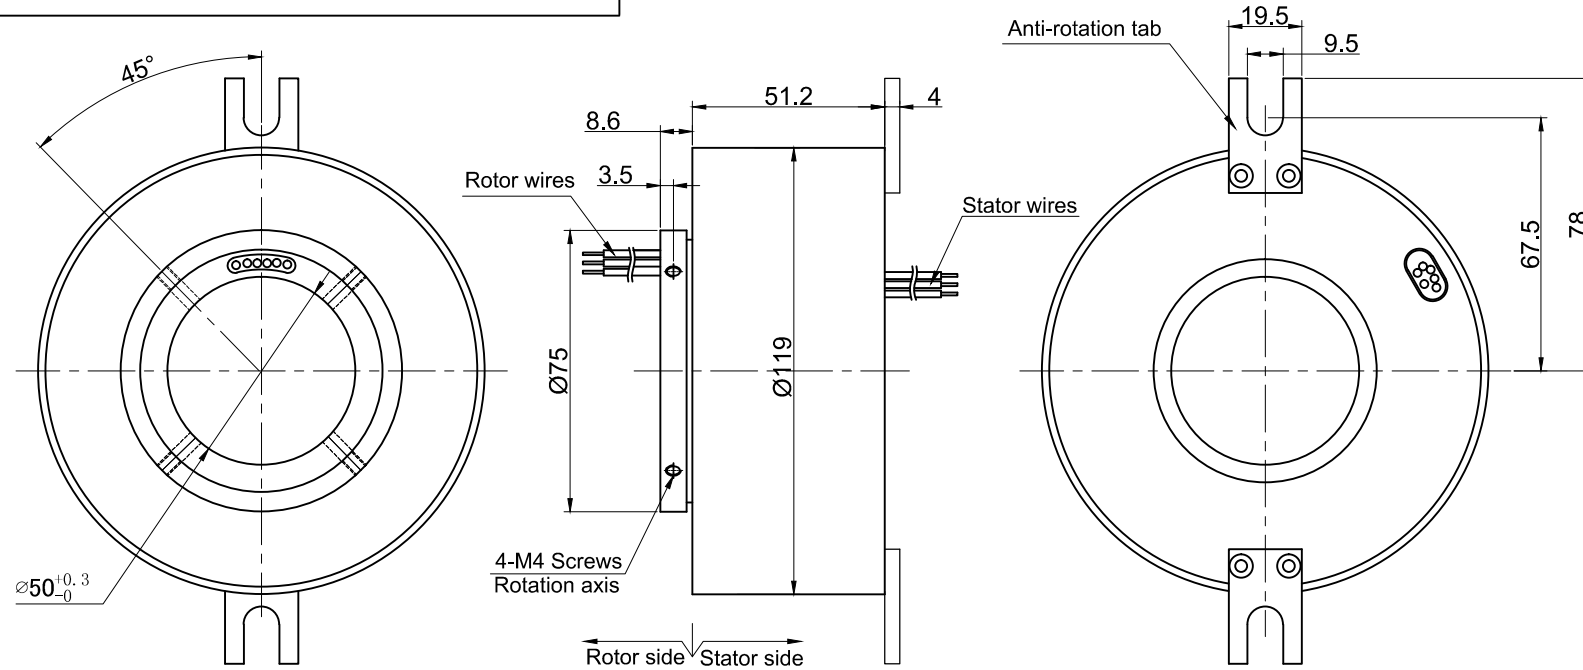

Electrical Specification

1	Rings	6	2	Current	Power module: 6 rings ,10A/ring
3	Voltage	0-380VDC/VAC			
4	Insulation Resistance	1000MΩ@500VDC			
5	Electrical noise	Max.10mΩ;			
6	Dielectric strength	1000VAC@50Hz;60S			

Mecchanical Specification

7	Speed	0~250RPM;	8	Torque	Max.0.2 N.M;
9	Life	Typical:20million revolutions, but strongly depends on your working conditions			

Environmental adaptability

10	Working temperature	-30℃~+80℃	11	Storage temperature	-35℃~+85℃
12	humidity	85±3%(30℃+5℃)			
13	Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times			
14	IP Class	IP51			

Materral/Attachment

15	Contact Material	Precious metal	16	Housing material	ALL Alloy+Engineering plastic
17	Lead wire	Rotor:300mm(See wiring diagram) Stator:500mm(See wiring diagram)			

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		6 rings 10A	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		DECIMAL X±.1		MODEL RT50119-P0610	
2.MATERIAL &FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		XX±.03		SIZE A	
FILLETS R.015		XXX±.005		R.E.V. A / 0	
THIRD ANGLE PROJECTION		FRACTIONAL±1/16		SCALE 1:1	
ANGULAR±1°		UNIT mm		RION	