



THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2020 RION TECHNOLOGY

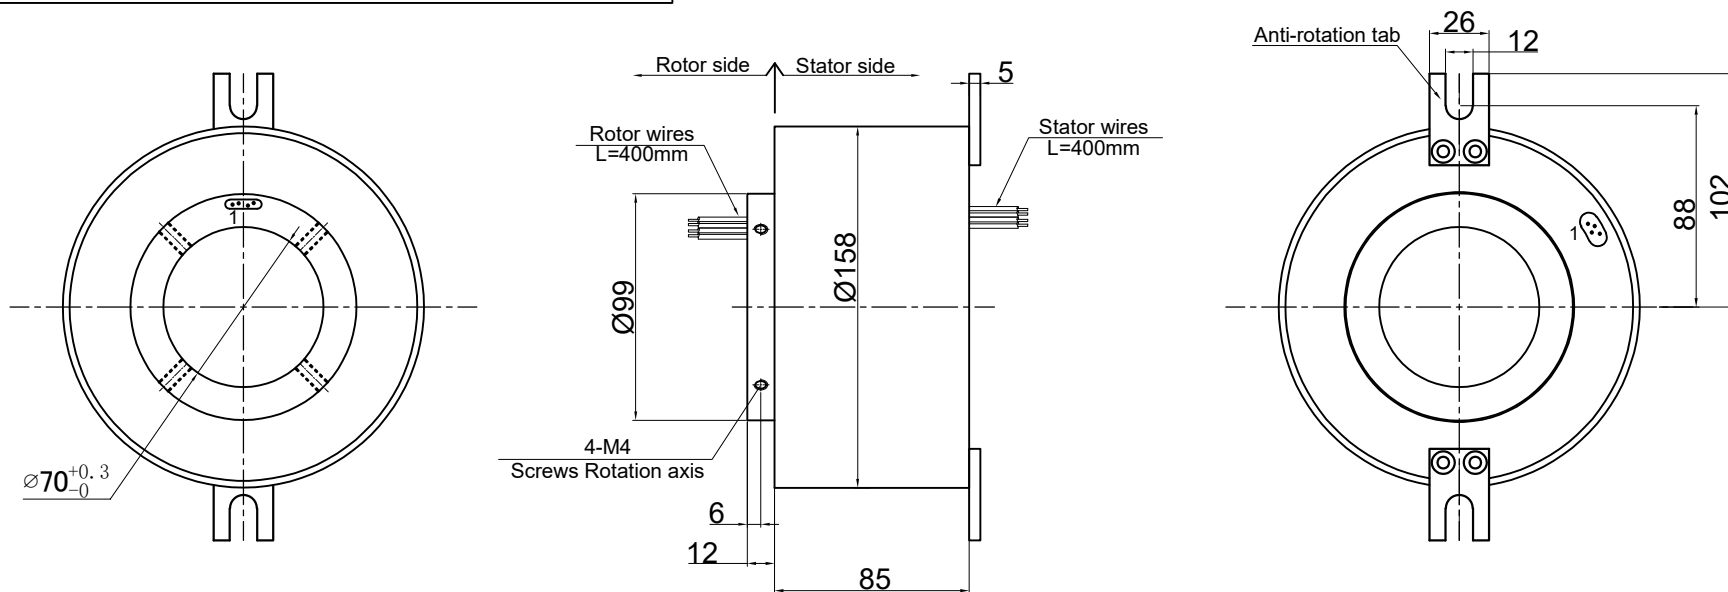

Electronic Specification					
1	Rings	4	2	Current	Signal module:4 Ring signal
3	Voltage	0-380VDC/VAC			
4	Insulation Resistance	500M Ω @500VDC			
5	Electrical noise	Max.10m Ω ;			
6	Dielectric strength	500VAC@50Hz;			
Mechanical Specification					
8	Speed	0~250RPM;	9	Torque	Max.0.1 N.M;
10	Life	Typical: 20million revolutions, but strongly depends on your working conditions			
Environmental adaptability					
11	Working temperature	-30 $^{\circ}$ C~+80 $^{\circ}$ C	12	Storage temperature	-35 $^{\circ}$ C~+85 $^{\circ}$ C
13	humidity	85 \pm 3%(30 $^{\circ}$ C+5 $^{\circ}$ C)			
14	Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times			
15	IP Class	IP65			
Materral/Attachment					
16	Contact Material	Noble metal	17	Housing material	Al Alloy
18	Lead wire	Rotor:(See wiring diagram) Stator:(See wiring diagram)			

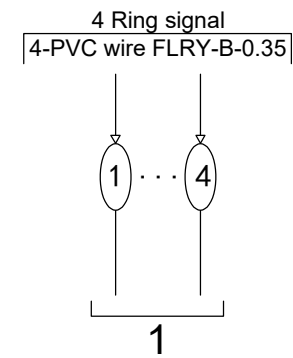

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		4 Ring signal			
1. ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR		DECIMAL X \pm .1		MODEL	RT70158-S04-IP65(N4359)		
2. MATERIAL & FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		XX \pm .03			SIZE	A	
FILLETS R.015	FINISH \checkmark	XXX \pm .005			R E V.	A / 0	
THIRD ANGLE PROJECTION		FRACTIONAL \pm 1/16		SCALE	1:1		
ANGULAR \pm 1 $^{\circ}$		DWG.NO	CJ	DATE	2022-08-25	UNIT	mm