




THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.  
COPY RIGHT@2020 RION TECHNOLOGY

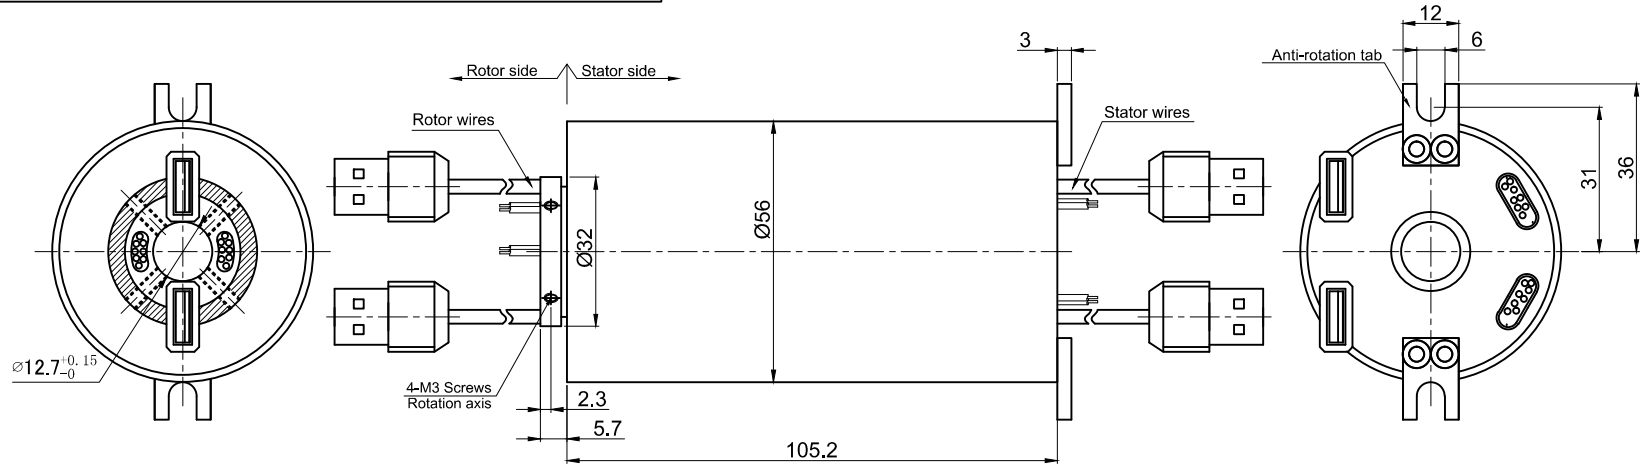

16 Rings Signal  
16-AWG22# teflon



8 Rings USB2.0 Signal+2 Ring shield  
2\*USB2.0 cable with M connector

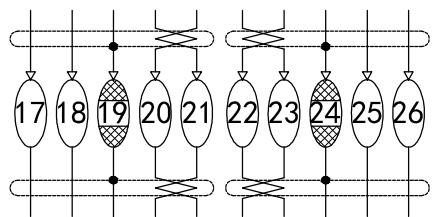

UNLESS OTHERWISE SPECIFIED		TOLERANCES EXCEPT AS NOTED		24 rings signal+2 rings shield	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		DECIMAL X±.1		MODEL MUSB2122-S16	
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		XX±.03		SIZE A	
FILLETS R.015		XXX±.005		R.E.V. A / 0	
THIRD ANGLE PROJECTION		FRACTIONAL±1/16		SCALE 1:1	
ANGULAR±1°		UNIT mm		UNIT mm	



### Electrical Specification

1 Rings	26	2 Current	Signal module:24 rings Signal +2 rings shield
3 Voltage	0-240VDC/VAC		
4 Insulation Resistance	500MΩ@500VDC		
5 Electrical noise	Max.10mΩ;		
6 Dielectric strength	500VAC@50Hz;60S		

### Mecchanical Specification

7 Speed	0~250RPM;	8 Torque	Max.0.2 N.M;
9 Life	Typical:20million revolutions, but strongly depends on your working conditions		

### Environmental adaptability

10 Working temperature	-30℃~+80℃	11 Storage temperature	-35℃~+85℃
12 humidity	85±3%(30℃+5℃)		
13 Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times		
14 IP Class	IP51		

### Materral/Attachment

15 Contact Material	Precious metal	16 Housing material	ALL Alloy+engineering plastic
17 Lead wire	Rotor:300mm(See wiring diagram) Stator:300mm(See wiring diagram)		