
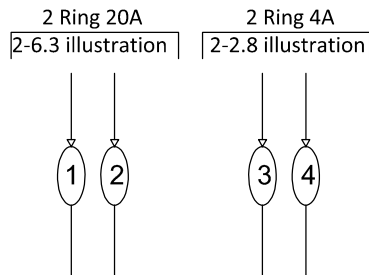


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORISED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.  
COPY RIGHT@2020 RION TECHNOLOGY

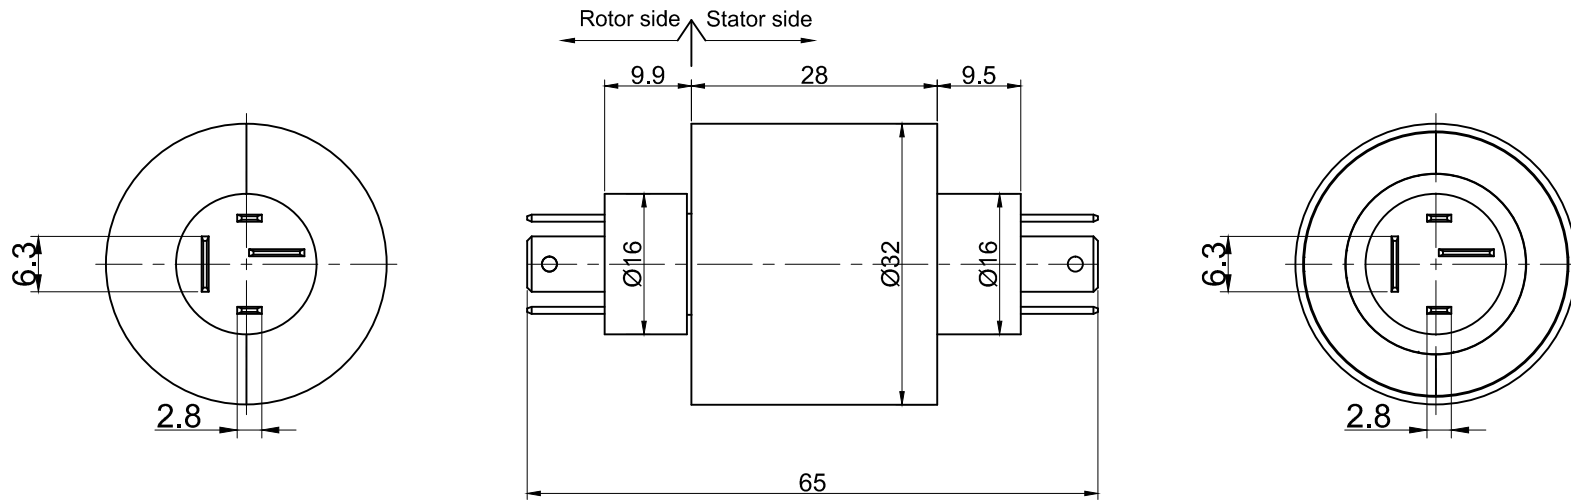

### Electrical Specification

1 Rings	4	2 Current	Power module: 2rings, 20A/ring 2rings, 4A/ring
2 Voltage	0-240VDC/VAC		
3 Insulation Resistance	500MΩ@300VDC		
4 Electrical noise	Max.10mΩ;		
5 Dielectric strength	200VAC@50Hz;60S		

### Mecchanical Specification

6 Speed	0~250RPM;	7 Torque	Max.0.2 N.M;
8 Life	Typical 10million revolutions, but strongly depends on your working conditions		

### Environmental adaptability

9 Working temperature	-40℃~+80℃	10 Storage temperature	-45℃~+85℃
11 humidity	85±3%(30℃+5℃)		
12 Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times		
13 IP Class	IP51		

### Materral/Attachment

14 Contact Material	noble metal	15 Housing material	engineering plastic
16 Lead wire	Rotor:(See wiring diagram) Stator:(See wiring diagram)		

UNLESS OTHERWISE SPECIFIED		TOLERANCES EXCEPT AS NOTED		2 rings 20A +2 rings 4A	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		MODEL		RW4032	
2.MATERIAL &FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		DECIMAL X±.1		SIZE A	
FILLETS R.015 FINISH ✓		XX±.03		R E V. A / 0	
THIRD ANGLE PROJECTION		XXX±.005		SCALE 1:1	
ANGULAR±1°		FRACTIONAL±1/16		UNIT mm	

