



THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.  
COPY RIGHT@2020 RION TECHNOLOGY

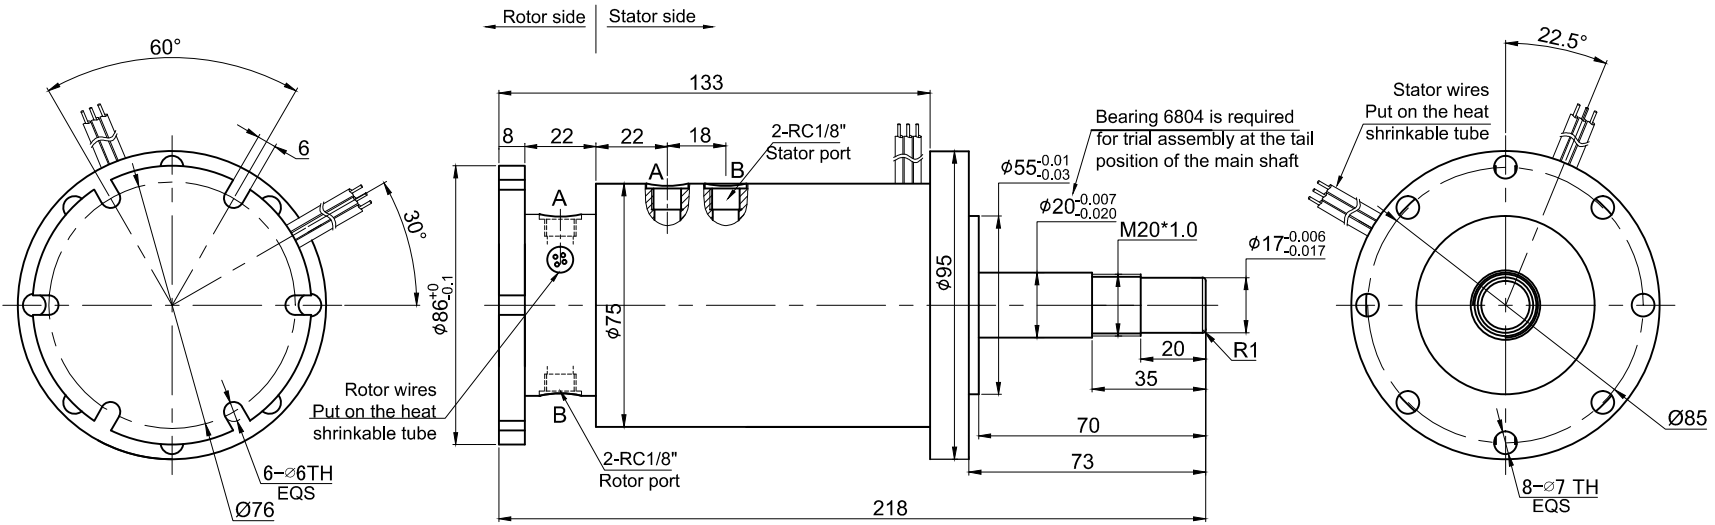

4 rings signal  
4-AWG22# teflon

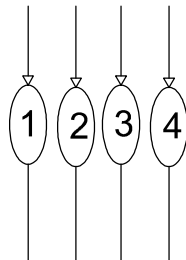

### Technical parameters of rotary joint

1	Pressure	Max 1 Mpa	2	Passage	2 passage Gas
3	Texture of materia	Aluminium alloy	4	Tracheal connector	RC1/8"
5	Media type	Compressed air			

### Electrical Specification

1	Rings	4	2	Current	Signal module: 4rings signal
3	Voltage	0-240VDC/VAC			
4	Insulation Resistance	500MΩ@500VDC			
5	Electrical noise	Max.10mΩ;			
6	Dielectric strength	500VAC@50Hz;60S			

### Mecchanical Specification

7	Speed	0~150RPM;	8	Torque	Max.4.5 N.M;
9	Life	Typical:20million revolutions;			but strongly depends on your working conditions

### Environmental adaptability

10	Working temperature	-30℃~+80℃	11	Storage temperature	-35℃~+85℃
12	humidity	85±3%(30℃+5℃)			
13	Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times			
14	IP Class	IP51			

### Materral/Attachment

15	Contact Material	Precious metal	16	Housing material	<b>ALL Alloy</b>
17	Lead wire	Rotor:300mm(See wiring diagram) Stator:300mm(See wiring diagram)			

UNLESS OTHERWISE SPECIFIED		2 passage Gas+4 rings signal	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		TOLERANCES (EXCEPT AS NOTED)	
2.MATERIAL &FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		MODEL	RX00717001
FILLETS R.015	FINISH ✓	DECIMAL	X±.1 XX±.03 XXX±.005
THIRD ANGLE PROJECTION		SIZE	A
ANGULAR±1°		R.E.V.	A / 0
		SCALE	1:1
		UNIT	mm

