
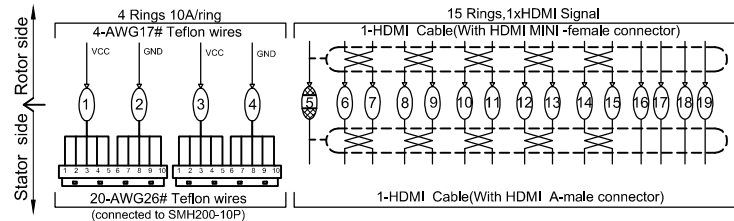


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.  
COPY RIGHT@2020 RION TECHNOLOGY

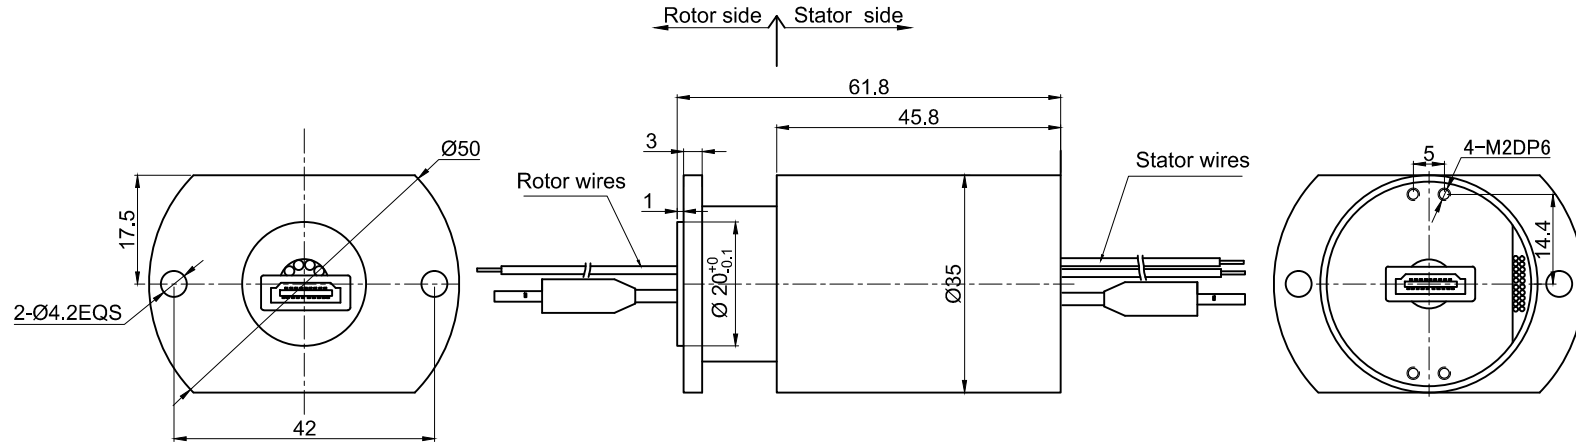

### Electrical Specification

1 Rings	19	2 Current	Power module:4rings 10A/ring Signal module:1-HDMI Signal
3 Voltage	0-300VDC/VAC		
4 Insulation Resistance	500MΩ@600VDC		
5 Electrical noise	Max.10mΩ;		
6 Dielectric strength	200VAC@50Hz;60S		

### Mechanical Specification

7 Speed	0~250RPM;	8 Torque	Max.0.2 N.M;
9 Life	Typical:60million revolutions, but strongly depends on your working conditions		

### Environmental adaptability

10 Working temperature	-30℃~+80℃	11 Storage temperature	-35℃~+85℃
12 humidity	85±3%(30℃+5℃)		
13 Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times		
14 IP Class	IP51		

### Material/Attachment

15 Contact Material	Gold-Gold	16 Housing material	ALL Alloy+engineering plastic
17 Lead wire	Rotor:300mm(See wiring diagram) Stator:300mm(See wiring diagram)		

UNLESS OTHERWISE SPECIFIED		TOLERANCES EXCEPT AS NOTED		4rings, 10A/ring+1-HDMI Signal	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		MODEL		RX00722001	
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		DECIMAL X±.1 XX±.03 XXX±.005		SIZE A	
FILLET R.015	FINISH ✓	RION		R.E.V. A/0	
THIRD ANGLE PROJECTION		FRACTIONAL 1/16		SCALE 1:1	
ANGULAR±1°		UNIT mm			