


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2020 RION TECHNOLOGY

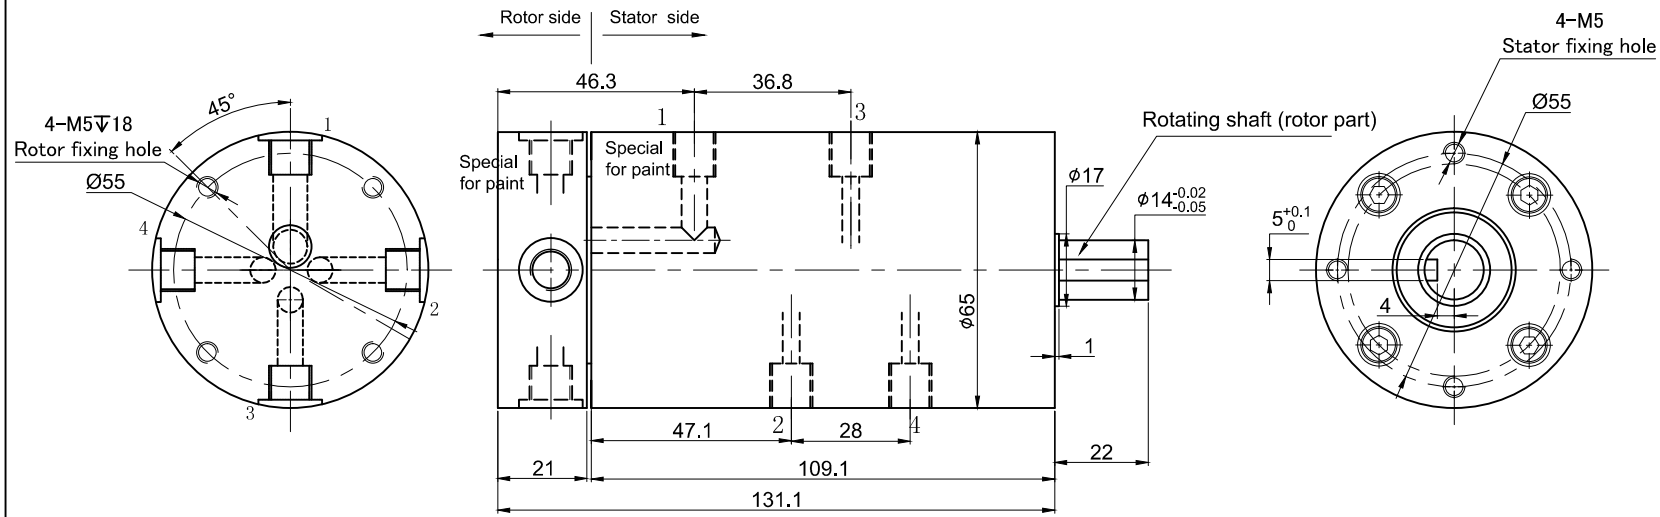

Note: special holes for paint shall be marked by laser and the font shall be clear.

passage	1	2	3	4
Media type	paint	Gas/water	Gas/water	Gas/water
Pressure	<1Mpa	<1Mpa	<1Mpa	<1Mpa
Tracheal connector	1/8"	1/8"	1/8"	1/8"
Flow Hole	φ8	φ5	φ5	φ5

UNLESS OTHERWISE SPECIFIED
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT
FILLETS R.015 FINISH \checkmark
THIRD ANGLE PROJECTION

TOLERANCES (EXCEPT AS NOTED)	3 passage Gas+1 passage paint	
MODEL	RX00724002	
DECIMAL X±.1 XX±.03 XXX±.005	SIZE	A
FRACTIONAL±1/16 ANGULAR±1°	R E V.	A / 0
	SCALE	1:1
	UNIT	mm



Technical parameters of rotary joint					
1	Pressure	Max 1 Mpa	2	Passage	4 passage
3	Torque	Max.5.5 N.M;	4	Tracheal connector	G1/8"
5	Media type	Compressed air+paint	6	Working temperature	-30℃~+130℃
7	Speed	0-400RPM	8	Storage temperature	-35℃~+135℃
9	Housing material	ALL Alloy+SS304			