

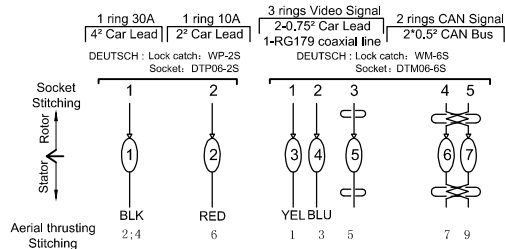
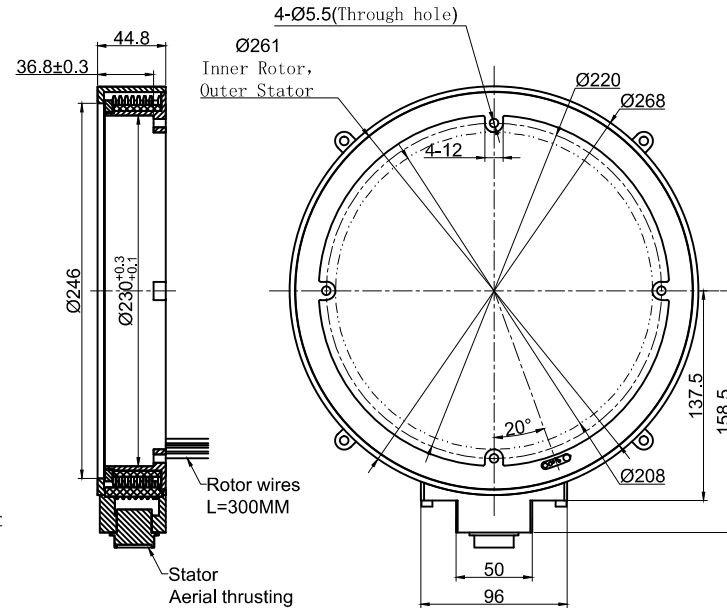


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2020 RION TECHNOLOGY

Aerial thrusting of Stator
Aerial thrusting of Slip Ring: Weifu WF24K9Z
Aerial thrusting for assigned customer: Weifu WF24J9TI
The shape is shown in the image below

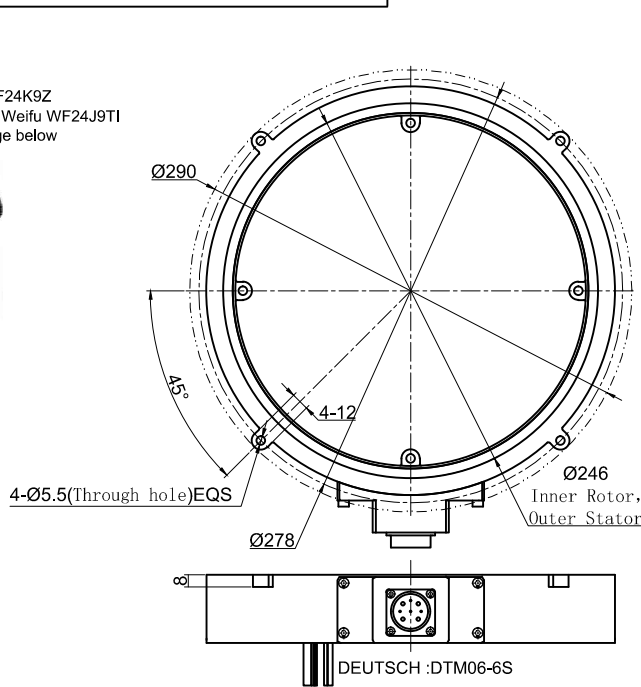

Stitching



Electrical Specification

1 Rings	7	2 Current	Power module: 1 ring, 30A/ring+ 1 ring, 10A/ring Signal module: 5 rings
2 Voltage	0-380VDC/VAC		
3 Insulation Resistance	1000MΩ@1000VDC		
4 Electrical noise	Max.5mΩ;		
5 Dielectric strength	1000VAC@50Hz;60S		

Mecchanical Specification

6 Speed	0~250RPM;	7 Torque	Max.0.2 N.M;
8 Life	Typical 10million revolutions, but strongly depends on your working conditions		

Environmental adaptability

9 Working temperature	-40℃~+80℃	10 Storage temperature	-45℃~+85℃
11 humidity	85±3%(30℃+5℃)		
12 Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times		
13 IP Class	IP51		

Materral/Attachment

14 Contact Material	noble metal	15 Housing material	engineering plastic+AL Alloy
16 Lead wire	Rotor:300mm(See wiring diagram) Stator:(See wiring diagram)		

UNLESS OTHERWISE SPECIFIED
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT

TOLERANCES EXCEPT AS NOTED
DECIMAL X±.1
XX±.03
XXX±.005

FILLETS R.015 FINISH ✓
THIRD ANGLE PROJECTION

1 rings 30A+1 rings 10A+5 rings Signal
MODEL RX00731001

SIZE A
R.E.V. A/0
SCALE 1:1
UNIT mm