

THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.

COPY RIGHT@2020 RION TECHNOLOGY

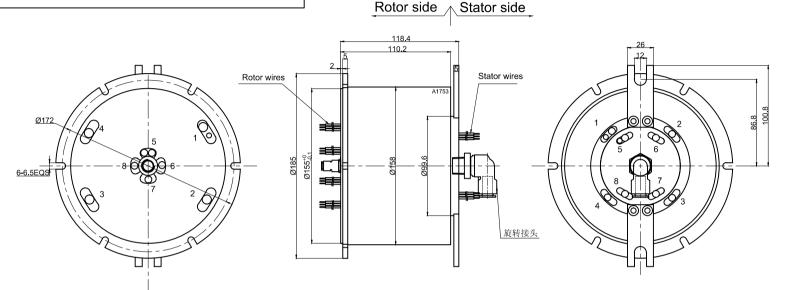

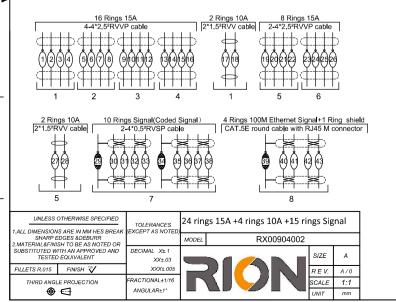

Technical parameters of rotary joint

ı	1	Pressure	Max 1 Mpa	2	Passage	1 passage Gas
	3	Texture of materia	Aluminium alloy	4	Tracheal connector	G1/4"
Ī	5	Media type	Compressed air			

Electrical Specification

	_			_		
ı	1	Rings	43	2	Current	Power module: 24 rings,15A/ring+
	2	Voltage	0-380VDC/VAC			4 rings,10A/ring
	3	Insulation Resistance	500MΩ@500VDC			Signal module: 15 rings
	4	Electrical noise	Max.10mΩ;			olginal modulor to imgo
Ī	5	Dielectric strength	500VAC@50Hz;60S			

Mechanical Specification

	6	Speed	0~250RPM;	7	Torque	Max.0.2 N.M;	_
ſ	8	Typical Life	20million revolutions, but stre		it strongly	depends on your working conditions	

Environmental adaptability

9	Working temperature	-40℃~+80℃	10	Storage temperature	-45℃~+85℃
11	humidity	85±3%(30℃+5℃)			
12	Rush	40g,11ms,Half sine wa	ve,		
		Vertical direction 3 tim	es,L	evel 3times	
13	IP Class	IP51			

Material/Attachment

14 Contact Material	noble metal	15	Housing material	AL Alloy			
16 Lead wire	Rotor:300mm(See wiring diagram) Stator:300mm(See wiring diagram)						