
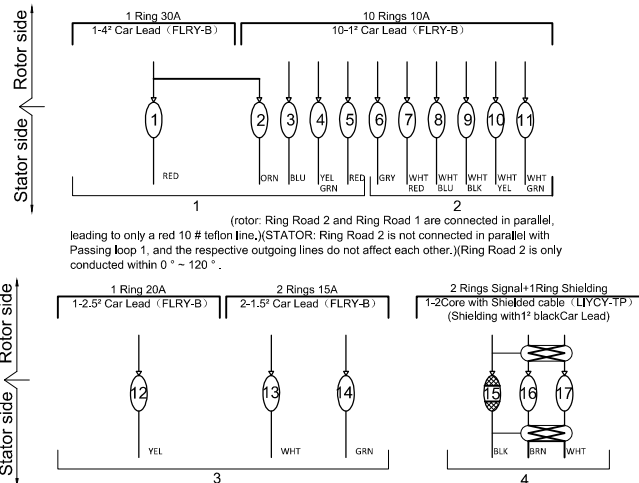


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2020 RION TECHNOLOGY

Mark only the production date and product ID

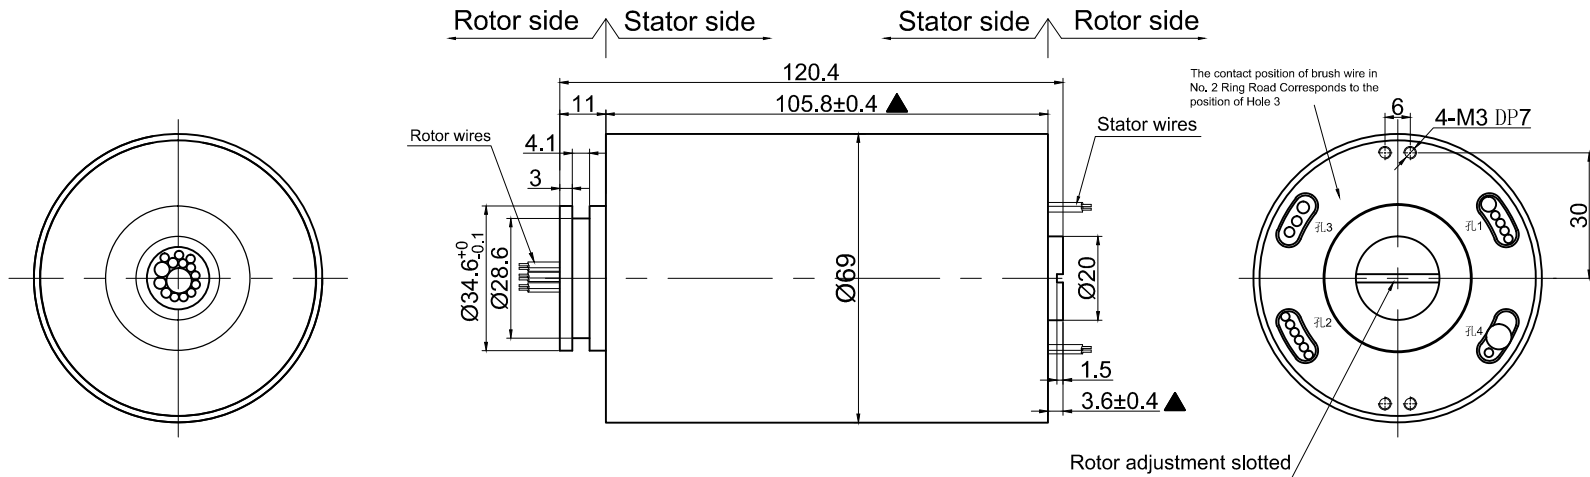

Electrical Specification

1 Rings	17	2 Current	Power module:1 Ring ,30A/ring+ 1 Ring , 20A/ring+2 Rings , 15A/ring +10 Rings, 10A/ring Signal module:2 Rings Signal+1 Ring Shielding
2 Voltage	0-300VDC/VAC		
3 Insulation Resistance	500MΩ@500VDC		
4 Electrical noise	Max.10mΩ;		
5 Dielectric strength	500VAC@50Hz;60S		

Mechanical Specification

6 Speed	0~250RPM;	7 Torque	Max.0.2 N.M;
8 Typical Life	10million revolutions, but strongly depends on your working conditions		

Environmental adaptability

9 Working temperature	-40℃~+80℃	10 Storage temperature	-45℃~+85℃
11 humidity	85±3%(30℃+5℃)		
12 Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times		
13 IP Class	IP51		

Material/Attachment

14 Contact Material	noble metal	15 Housing material	engineering plastic+AL Alloy
16 Lead wire	Rotor:300mm(See wiring diagram) Stator:300mm(See wiring diagram)		

UNLESS OTHERWISE SPECIFIED
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT

TOLERANCES (EXCEPT AS NOTED)
DECIMAL X±.1
XX±.03
XXX±.005

FILLETES R.015 FINISH
THIRD ANGLE PROJECTION

1 Rings 30A+1 Rings 20A+2 Rings 15A
+10 Rings 10A+2 Rings Signal+1 Ring Shielding

MODEL RX00904006

RION

SIZE A
R.E.V. A/0
SCALE 1:1
UNIT mm