
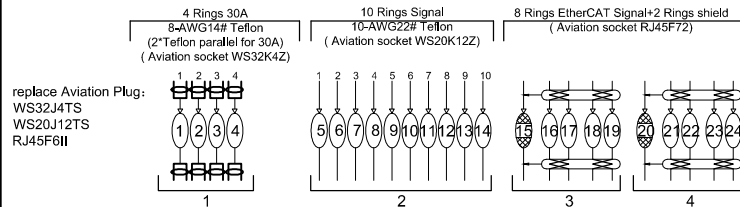


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.  
COPY RIGHT@2020 RION TECHNOLOGY

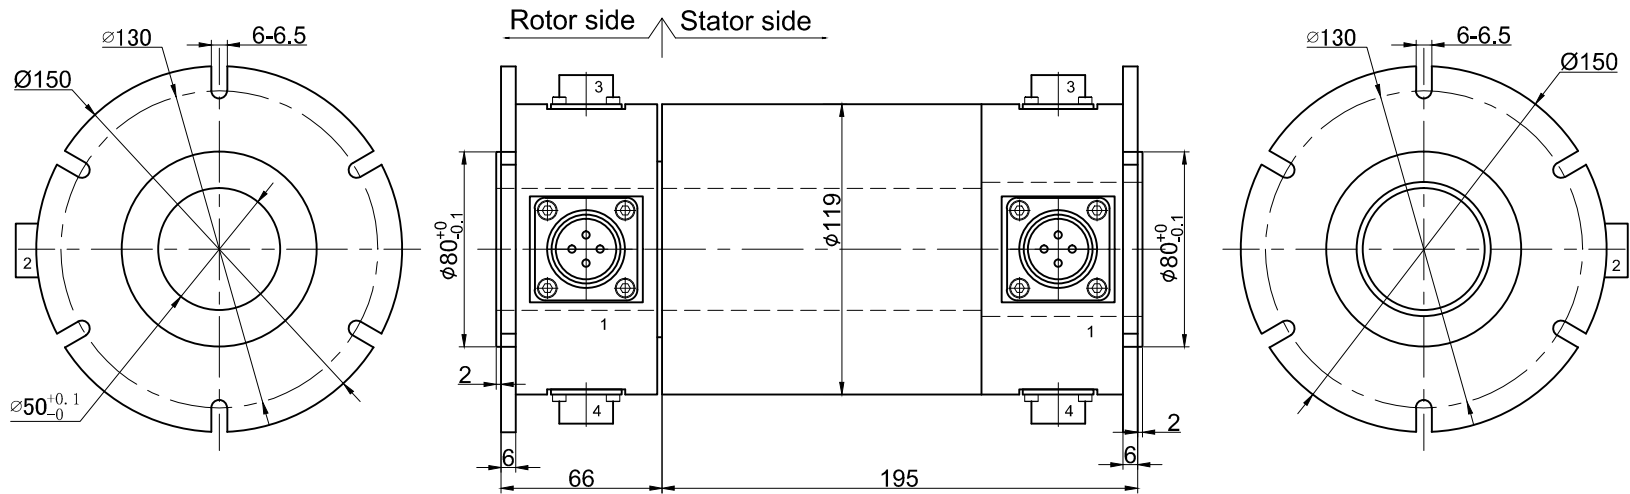

replace Aviation Plug:  
WS32J4TS  
WS20J12TS  
RJ45F6II

### Electrical Specification

1 Rings	24	2 Current	Power module: 4 Rings 30A Signal module: 10 Rings Signal+ 8 Rings EtherCAT Signal+ 2 Rings shield
2 Voltage	0-380VDC/VAC		
3 Insulation Resistance	500MΩ@500VDC		
4 Electrical noise	Max.10mΩ;		
5 Dielectric strength	500VAC@50Hz;60S		

### Mechanical Specification

6 Speed	0~250RPM;	7 Torque	Max.0.2 N.M;
8 Typical Life	10million revolutions, but strongly depends on your working conditions		

### Environmental adaptability

9 Working temperature	-40℃~+80℃	10 Storage temperature	-45℃~+85℃
11 humidity	85±3%(30℃+5℃)		
12 Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times		
13 IP Class	IP51		

### Material/Attachment

14 Contact Material	noble metal	15 Housing material	ALL Alloy
16 Lead wire	Rotor: Aviation socket Stator: Aviation socket		

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		MODEL RX00908001	
2.MATERIAL &FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		DECIMAL X±.1 XX±.03 XXX±.005	
FILLETS R.015	FINISH ✓		
THIRD ANGLE PROJECTION			
ANGULAR±1°		R.E.V. A/0	
		SCALE 1:1	
		UNIT mm	