


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORISED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2020 RION TECHNOLOGY

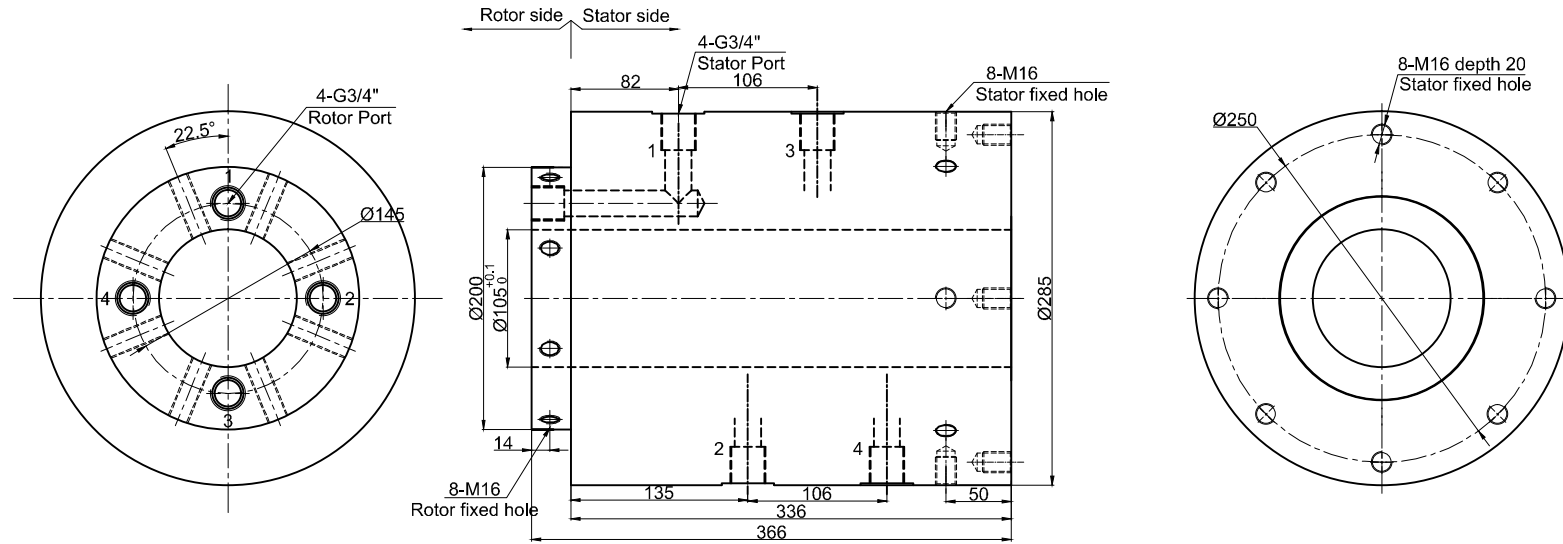

rotary joints specifications

| | |
|---------------------|--|
| Passage | 4 passage hydraulic oil |
| Channel pressure | ≤ 300 Bar |
| Working speed | 0-10RPM |
| Torque | ≤ 80 N.M |
| IP Class | IP54 |
| Working Temperature | -40°C - 80°C |
| Housing Material | Special stainless steel |

| | | | | | |
|--|---------------------|-----------------------------|--|-------------------------|------------|
| UNLESS OTHERWISE SPECIFIED | | TOLERANCES EXCEPT AS NOTED: | | 4 passage hydraulic oil | |
| 1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR | | DECIMAL X±.1 | | MODEL | RX01016001 |
| 2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT | | XX±.03 | | SIZE | A |
| FILLETS R.015 | FINISH \checkmark | XXX±.005 | | R.E.V. | A / 0 |
| THIRD ANGLE PROJECTION | | FRACTIONAL±1/16 | | SCALE | 1:1 |
| \oplus \triangleleft | | ANGULAR±1° | | UNIT | mm |
| | | | | | |