



THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2020 RION TECHNOLOGY

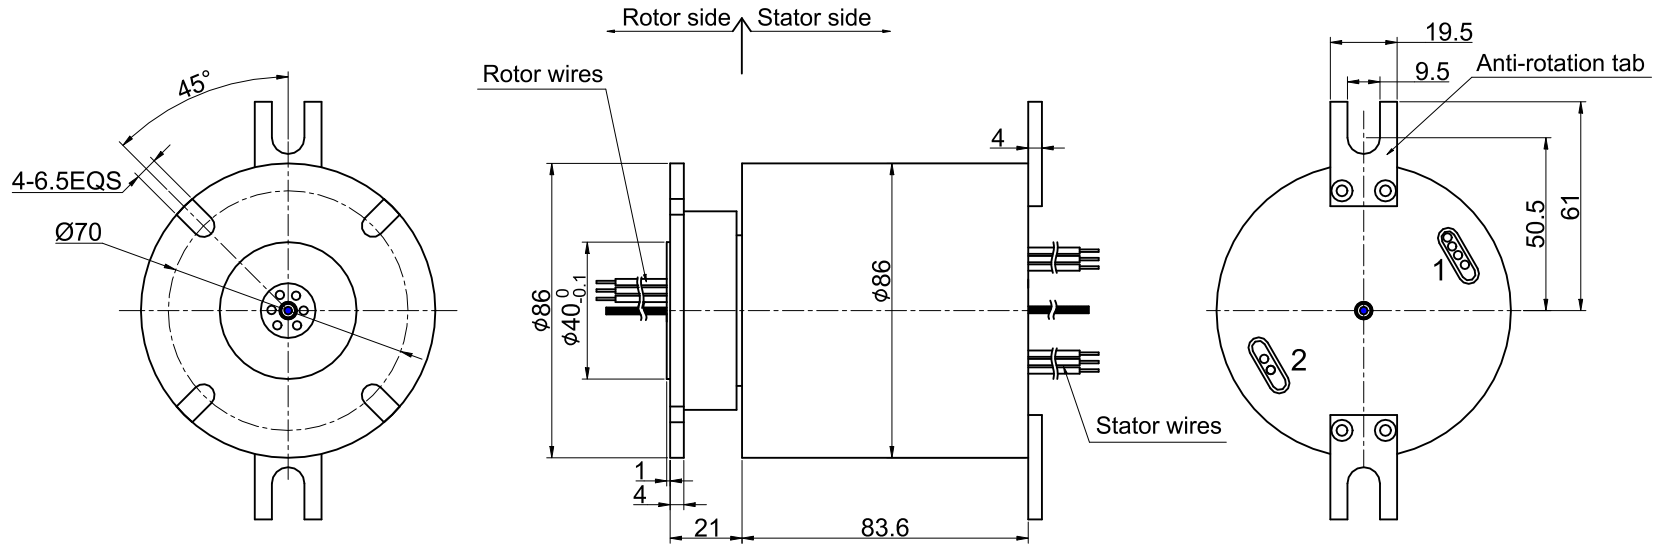

3 rings 40A
6-AWG 14 #teflon
(2*teflon parallel for 40A)



Optical fiber:	
1.SMF optical fiber(9/125um)	2.Wavelength: 1310nm~1550nm
3.Insertion loss (23°): <4 dB	4.Type: FC
5.Return loss: >50dB	6.Lead wire: Rotor:1000mm Stator:1000mm

Electrical Specification			
1 Rings	3	2 Current	Power module:3 rings:40A/ring
3 Voltage	0-380VDC		
4 Insulation Resistance	500MQ@500VDC		
5 Electrical noise	Max.10mΩ;		
6 Dielectric strength	500VDC;60S		

Mechanical Specification			
7 Speed	0~250RPM;	8 Torque	Max.0.2 N.M;
9 Typical Life	10million revolutions, but strongly depends on your working conditions		

Environmental adaptability			
10 Working temperature	-40℃~+80℃	11 Storage temperature	-45℃~+85℃
12 humidity	85±3%(30℃+5℃)		
13 Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times		
14 IP Class	IP51		

Material/Attachment			
15 Contact Material	noble metal	16 Housing material	ALL Alloy
17 Lead wire	Rotor:300mm(See wiring diagram) Stator:30mm(See wiring diagram)		

UNLESS OTHERWISE SPECIFIED		1 channel single mode fiber+3 rings 40A	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		TOLERANCES (EXCEPT AS NOTED)	MODEL RX01230003
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		DECIMAL X±.1 XX±.03 XXX±.005	SIZE A
FILLET R.015	FINISH	RION	R.E.V. A/0
THIRD ANGLE PROJECTION		FRACTIONAL±1/16 ANGULAR±1°	SCALE 1:1
			UNIT mm