
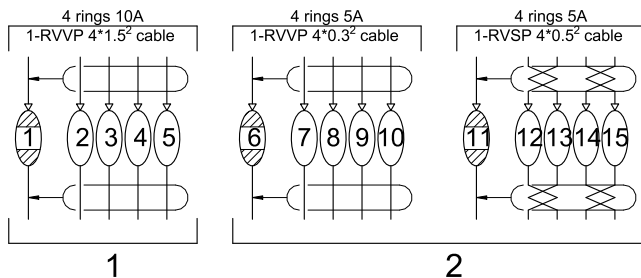


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2020 RION TECHNOLOGY

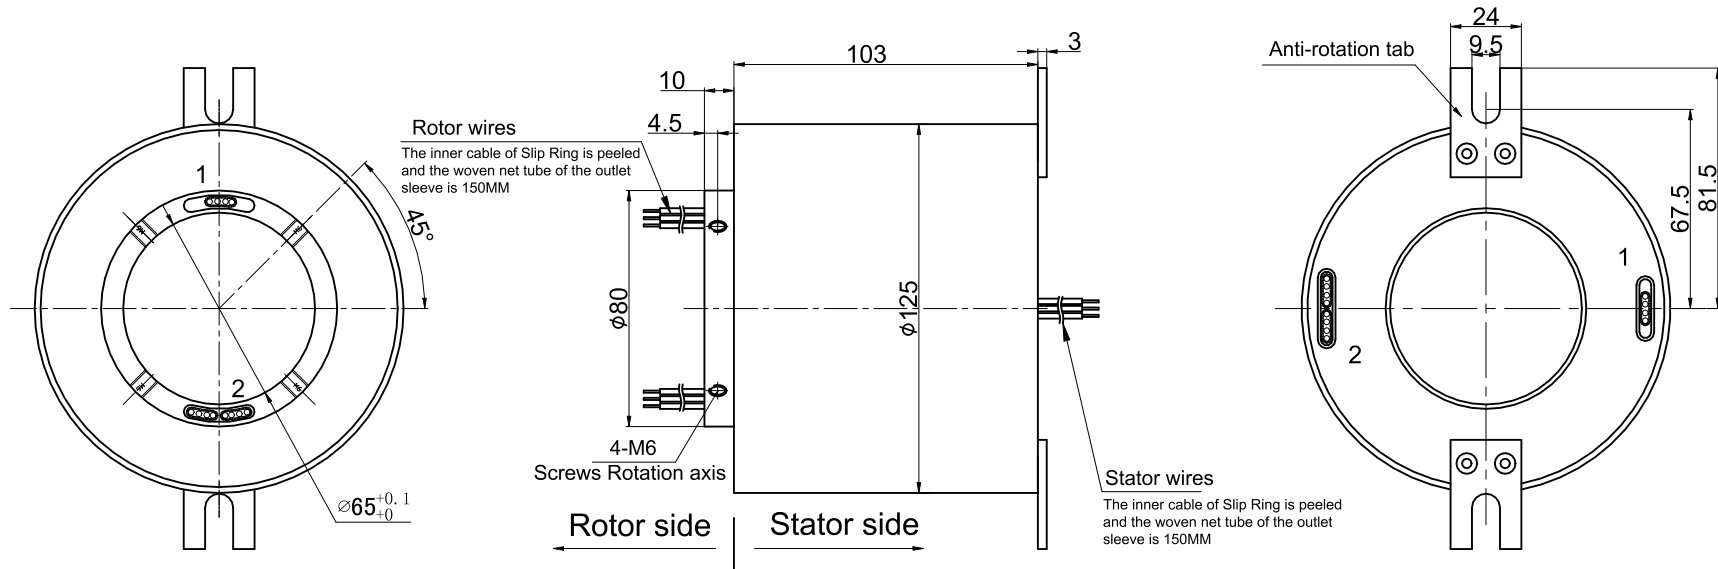

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		4 rings 10A+ 8 rings 5A+3 rings Shielding	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		DECIMAL Xx.1		MODEL RX01231006	
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		XXx.03		SIZE A	
FILLETS R.015		XXXx.005		R.E.V. A/1.0	
THIRD ANGLE PROJECTION		FRACTIONAL±1/16		SCALE 1:1	
ANGULAR±1°		ANGULAR±1°		UNIT mm	
				SIZE A	
				UNIT mm	

Electrical Specification

1 Rings	15	2 Current	Signal module: 4rings, 10A/ring
2 Voltage	0-380VDC/VAC		8rings, 5A/ring
3 Insulation Resistance	800MΩ@3000VDC		Signal module: 3 rings Shielding
4 Electrical noise	Max.10mΩ;		
5 Dielectric strength	1000VAC@50Hz;60S		

Mechanical Specification

6 Speed	0~250RPM;	7 Torque	Max.1 N.M;
8 Typical Life	10million revolutions, but strongly depends on your working conditions		

Environmental adaptability

9 Working temperature	-40℃~+80℃	10 Storage temperature	-45℃~+85℃
11 humidity	85±3%(30℃+5℃)		
12 Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times		
13 IP Class	IP65		

Material/Attachment

14 Contact Material	noble metal	15 Housing material	All Alloy
16 Lead wire	Rotor:5000mm(See wiring diagram) Stator:5000mm(See wiring diagram)		