
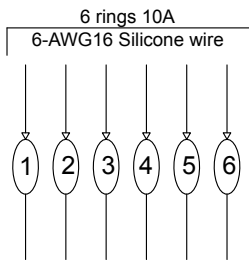


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.  
COPY RIGHT@2020 RION TECHNOLOGY

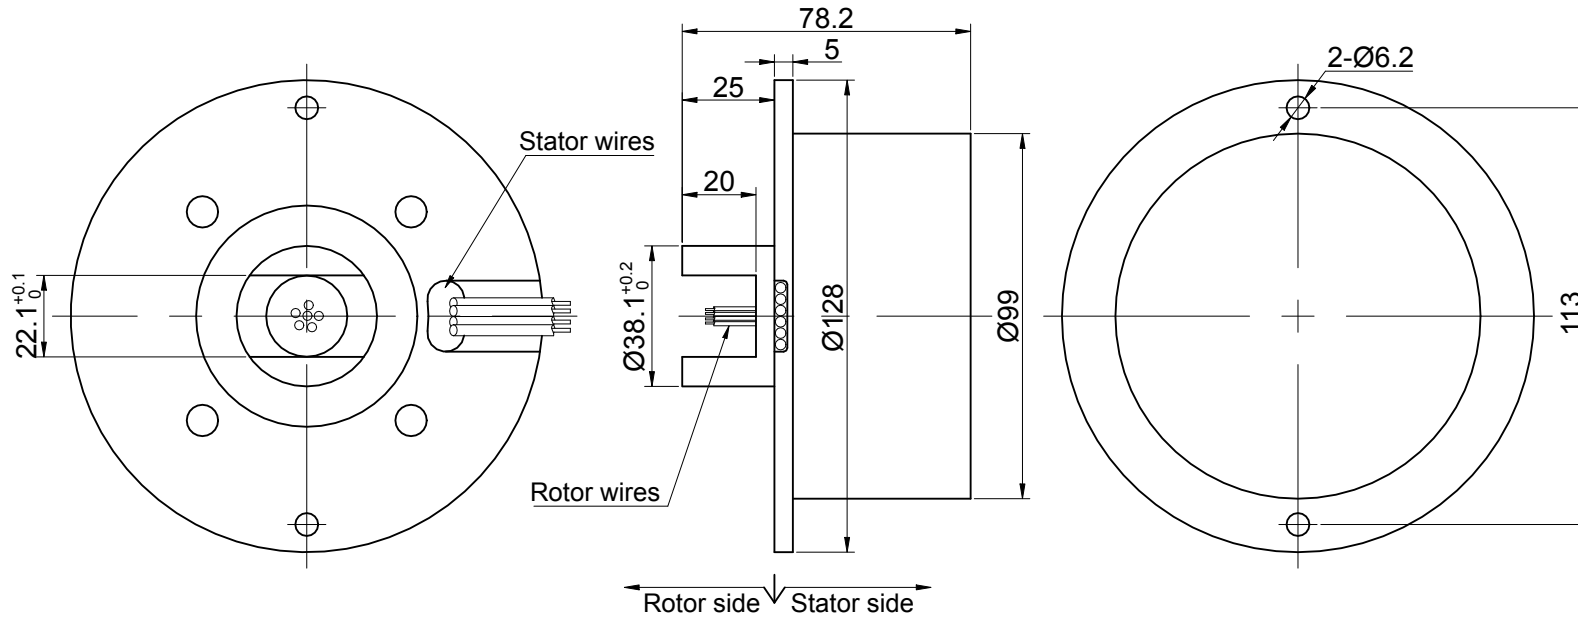

UNLESS OTHERWISE SPECIFIED		6 rings 10A	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		TOLERANCES (EXCEPT AS NOTED)	MODEL RX01231007
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		DECIMAL Xs.1 XXs.03 XXXs.005	SIZE A
FILLET R.015	FINISH ✓		R.E.V. A/0
THIRD ANGLE PROJECTION			SCALE 1:1
		FRACTIONAL±1/16 ANGULAR±1°	UNIT mm

Electrical Specification			
1 Rings	6	2 Current	Power module:6 rings, 10A/ring
2 Voltage	0-380VDC/VAC		
3 Insulation Resistance	1000MΩ@500VDC		
4 Electrical noise	Max.10mΩ;		
5 Dielectric strength	1000VAC@50Hz;60S		
Mechanical Specification			
6 Speed	0~250RPM;	7 Torque	Max.1.5 N.M;
8 Typical Life	10million revolutions, but strongly depends on your working conditions		
Environmental adaptability			
9 Working temperature	-40℃~+80℃	10 Storage temperature	-45℃~+85℃
11 humidity	85±3%(30℃+5℃)		
12 Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times		
13 IP Class	IP65		
Material/Attachment			
14 Contact Material	noble metal	15 Housing material	All Alloy
16 Lead wire	Rotor:550mm(See wiring diagram) Stator:1300mm(See wiring diagram)		