
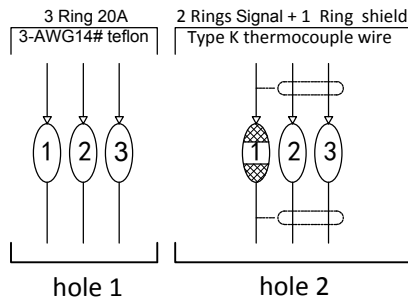


MARK	ECN NO.	Modify	Approve	DATE

THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

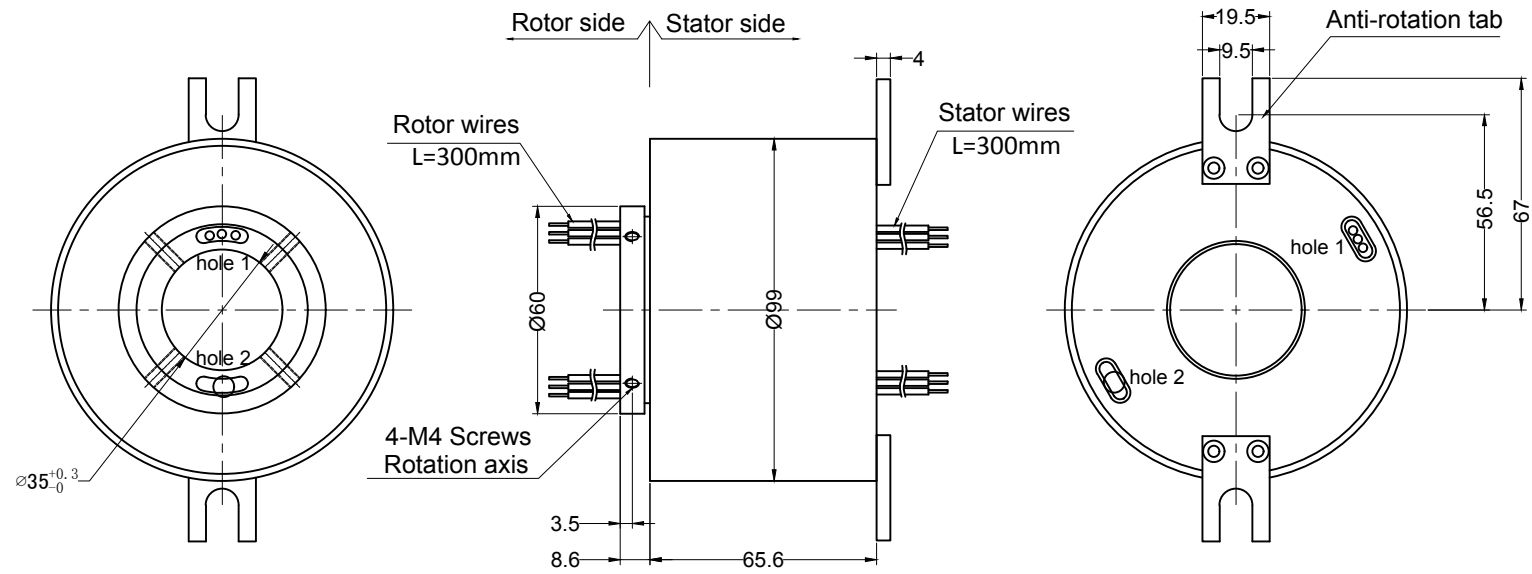

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		3 Ring 20A 2 Rings Signal + 1 Ring shield		
1. ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR.		SIZE RANGE TOLERANCE		MODEL	RX26060801	
2. MATERIAL/FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT.		X < 6	±0.1		SIZE	A
		6 ≤ X < 30	±0.2		REV.	A / 0
		30 ≤ X < 120	±0.3		SCALE	1:1
		120 ≤ X < 400	±0.5		UNIT	mm
		400 ≤ X < 1000	±0.8			
		1000 ≤ X	±1.2			
FILLETS R.015	FINISH 	FRACTIONAL ±1/16 ANGULAR ±1°				
THIRD ANGLE PROJECTION 						

Electrical Specifications

1	Rings	5	2	Current	Signal module: 3 Ring 20A 2 Rings Signal + 1 Ring shield
3	Voltage	0-240VDC/VAC			
4	Insulation Resistance	≥500MΩ@500VDC			
5	Electrical noise	MAX 10 mΩ			
6	Dielectric strength	500VAC@50Hz;60s			

Mechanical Specification

7 Speed	0~250 rpm	8 Torque	MAX 0.2 N·m
---------	-----------	----------	-------------

Environmental adaptability

9 Working temperature	-30℃~+80℃	10 Storage temperature	-35℃~+85℃
11 Humidity	85±3%RH(30℃+5℃)		
12 Shock	40g,11ms,Half sine wave, Vertical 3 times,Horizontal 3 times		
13 IP rating	IP51		

Material/Attachment

14 Contact Material	Noble metal	15 Housing material	Engineering plastic+Al Alloy
16 Lead wire	Rotor:300mm(See wiring diagram) Stator:300mm(See wiring diagram)		