


MARK	ECN NO.	Modify	Approve	DATE

THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

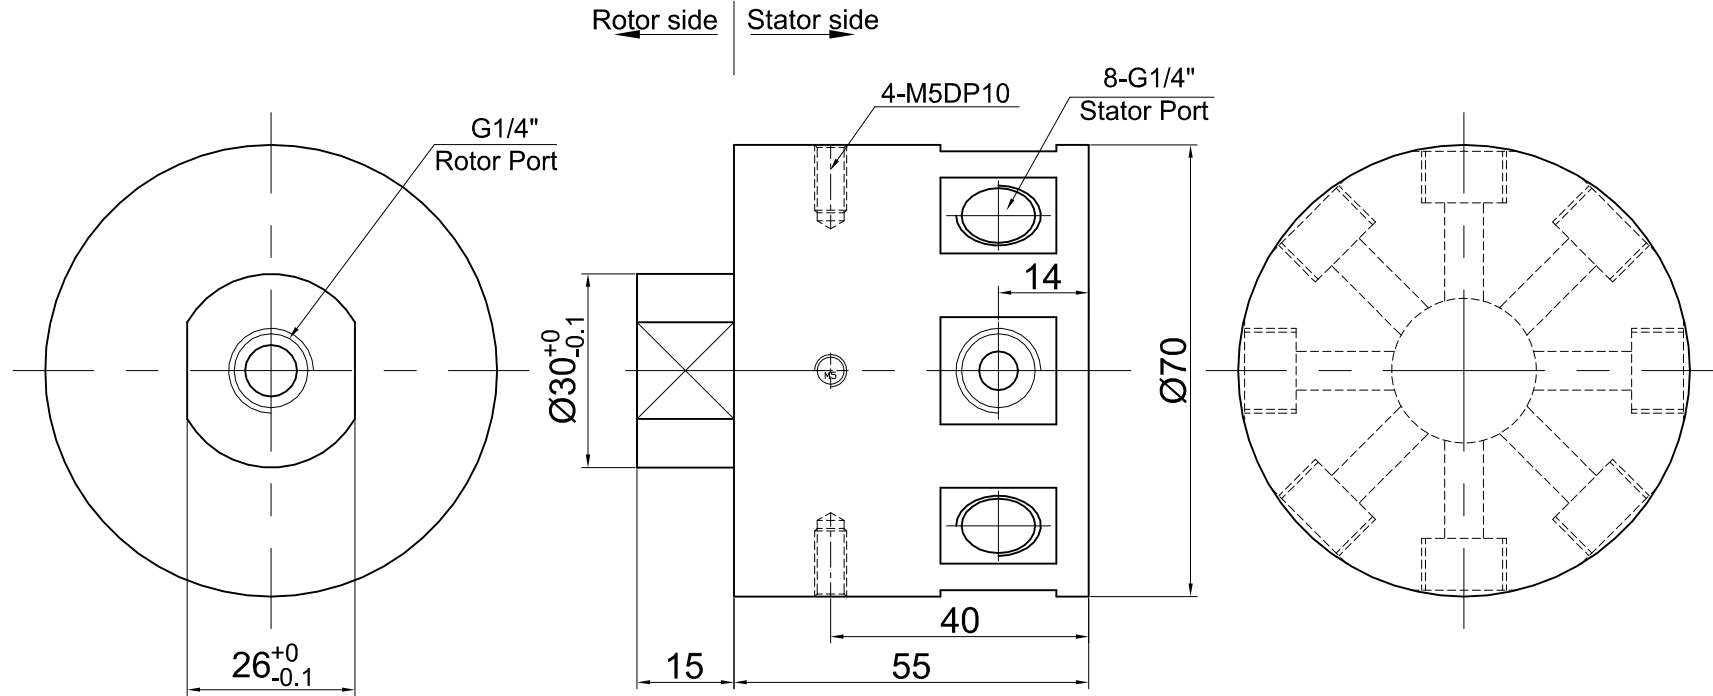

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		1 passage in;8 passage out	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR.		SIZE RANGE	TOLERANCE	MODEL	RX26061001
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT.		X < 6	±0.1	SIZE	A
FILLETS R.015		6 ≤ X < 30	±0.2	R E V.	A / 0
FINISH \checkmark	THIRD ANGLE PROJECTION	30 ≤ X < 120	±0.3	SCALE	1:1
		120 ≤ X < 400	±0.5	UNIT	mm
		400 ≤ X < 1000	±0.8		
		1000 ≤ X	±1.2		
		FRACTIONAL ± ANGULAR ±1° (3.3)			

Technical parameters of rotary joint					
1	Pressure	Max 1Mpa	2	Passage	1 passage in; 8 passage out
3	Torque	Max.3 N.M;	4	Tracheal connector	G1/4"
5	Media type	Compressed air	6	Working temperature	-30℃~+80℃
7	Speed	0-100RPM	8	Storage temperature	-35℃~+85℃
9	Texture of materia	Main shaft SS304 + Al Alloy Shell			