MARK	ECN NO.	Modify	Approve	DATE

THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

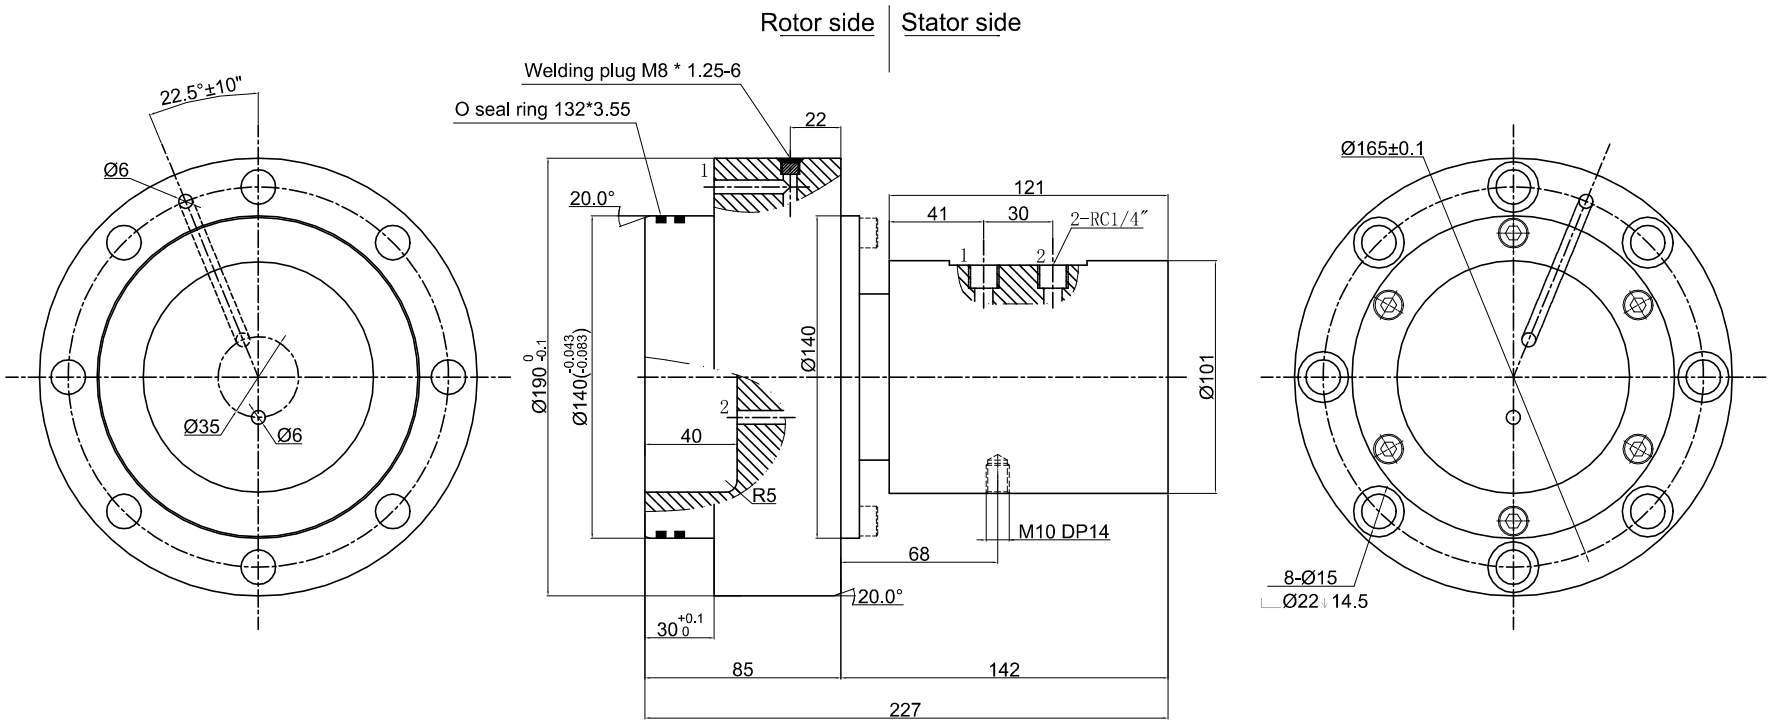

UNLESS OTHERWISE SPECIFIED

1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR.

2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT.

FILLETS R.015 | FINISH 125

THIRD ANGLE PROJECTION

TOLERANCES (EXCEPT AS NOTED)

SIZE RANGE	TOLERANCE
X < 6	±0.1
6 ≤ X < 30	±0.2
30 ≤ X < 120	±0.3
120 ≤ X < 400	±0.5
400 ≤ X < 1000	±0.8
1000 ≤ X	±1.2

FRACTIONAL±1/16
ANGULAR±1°
(5,5)

2 Passage

MODEL RX26061004

RION

SIZE	A
REV.	A / 0
SCALE	1:1
UNIT	mm

Technical parameters of rotary joint

1	Pressure	Max 20 Mpa;	2	Passage	2 Passage
3	Torque	Max 20 N.M;	4	Tracheal connector	RC1/4"
5	Media type	Hydraulic oil	6	Working temperature	-30℃~+80℃
7	Speed	0-100RPM	8	Storage temperature	-35℃~+85℃
9	Texture of materia	Carbon steel (hardened and tempered HB220-250 and rust-proof)			