


MARK	ECN NO.	Modify	Approve	DATE

THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

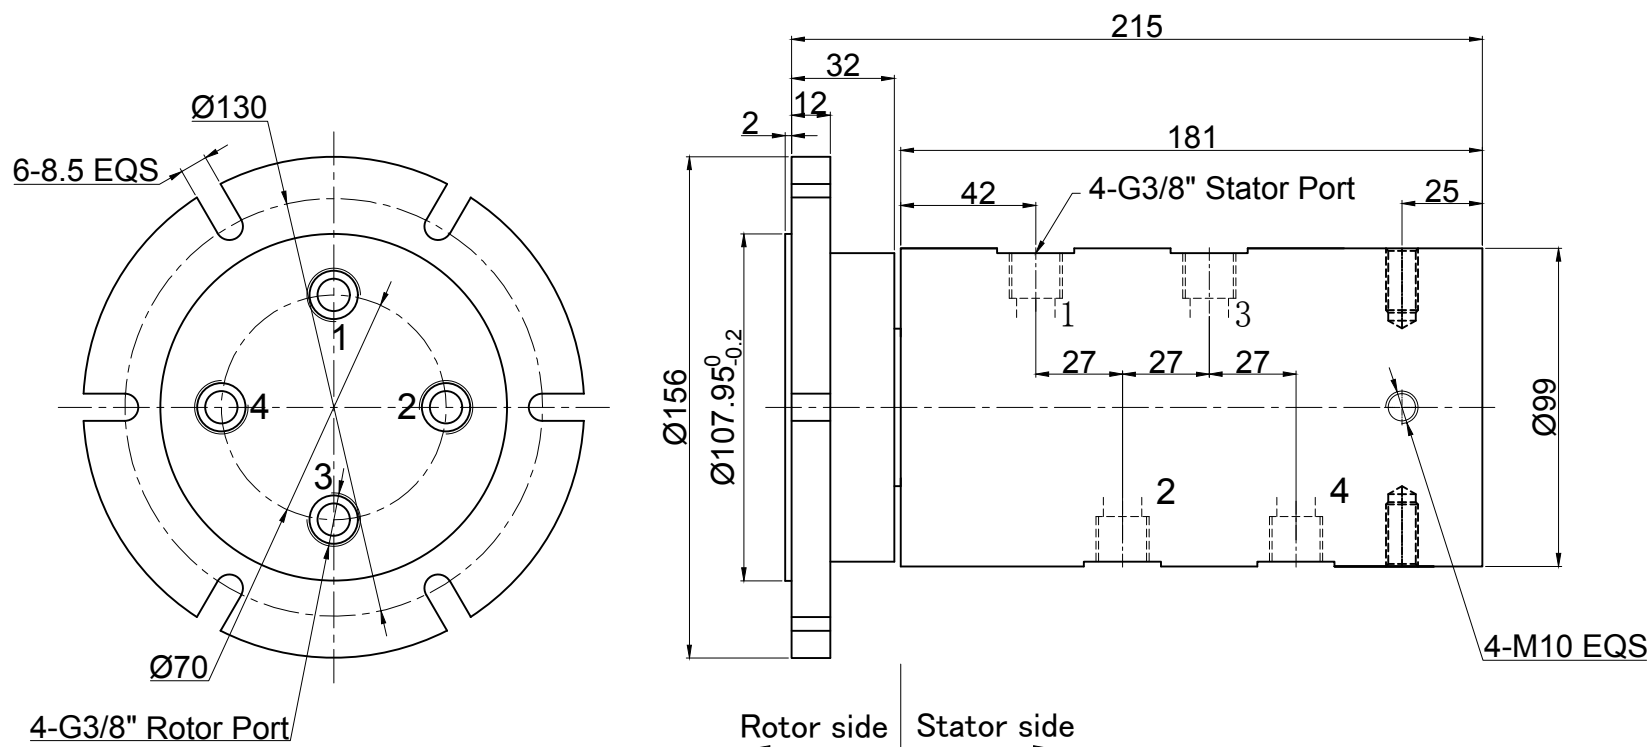

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		4 Passages Hydraulic oil			
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR.		SIZE RANGE TOLERANCE		MODEL		RX26061503	
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT.		X < 6 ±0.1 6 ≤ X < 30 ±0.2 30 ≤ X < 120 ±0.3 120 ≤ X < 400 ±0.5 400 ≤ X < 1000 ±0.8 1000 ≤ X ±1.2				SIZE	A
FILLETS R.015 FINISH ✓		THIRD ANGLE PROJECTION				REV.	A / 0
		FRACTIONAL±1/16 ANGULAR±1° (3.3)				SCALE	1:1
						UNIT	mm

Technical parameters of rotary joint					
1	Pressure	10 MPa	2	Passage	4 passage
3	Torque	Max. 25 N·m;	4	Tracheal connector	G3/8"
5	Media type	Hydraulic oil	6	Working temperature	-30℃~+80℃
7	Speed	0~250 rpm	8	Storage temperature	-35℃~+85℃
9	Texture of materia	Special carbon steel			