



MARK	ECN NO.	Modify	Approve	DATE

THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

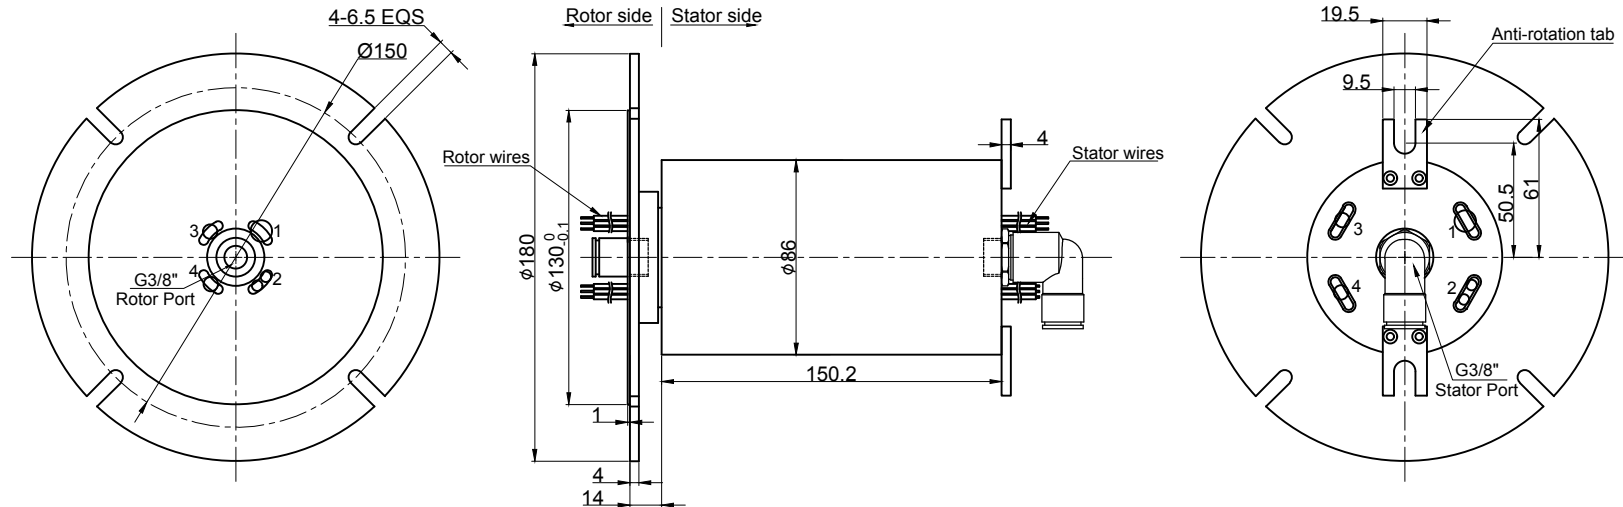

Cable length w/o connectors

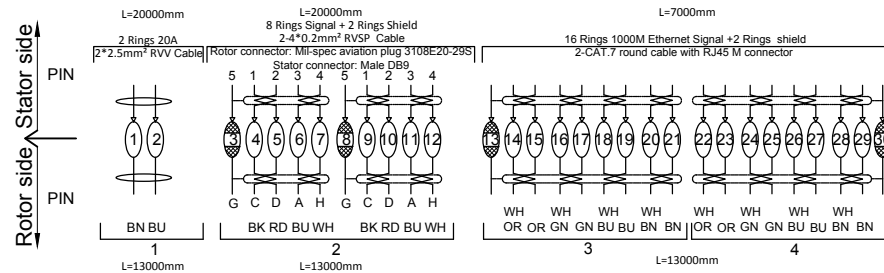

Electrical Specifications

1 Rings	30	2 Current	Power module: 2 Rings 20A
3 Voltage	0~380VAC / VDC(other) 0~100VAC / VDC(Signal)		Signal module: 8 Rings Signal + 16 Rings 1000M Ethernet Signal +4 Rings shield
4 Insulation Resistance	≥500MΩ@500VDC(other) ≥500MΩ@300VDC(Signal)		
5 Dielectric strength	500VAC@50HZ;60S(other) 200VAC@50HZ;60S(Signal)		
6 Contact resistance variation	≤70mΩ(other) ≤10mΩ(Signal)		

Mechanical Specification

7 Speed	0~100 rpm	8 Torque	MAX 2 N·m
---------	-----------	----------	-----------

Environmental adaptability

9 Working temperature	-30℃~+80℃	10 Storage temperature	-35℃~+80℃
11 Humidity	85±3%RH(30℃+5℃)		
12 Shock	Axial acceleration 50g,11ms,Half sine wave, Vertical 3 times,Horizontal 3 times		
13 IP rating	IP51		

Material/Attachment

14 Contact Material	Noble metal	15 Housing material	Al Alloy
16 Lead wire	Rotor:(See wiring diagram) Stator:(See wiring diagram)		

Technical parameters of rotary joint

1 Pressure	<1 MPa	2 Passage	1 passage
3 Torque	Max. 2 N·m;	4 Tracheal connector	G3/8"
5 Media type	Compressed Air	6 Air tube size	12mm
7 Speed	0-100 rpm	8 Working temperature	-30 ~+80
9 Texture of materia	Al Alloy	10 Storage temperature	-35 ~+85
UNLESS OTHERWISE SPECIFIED 1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR. 2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT. FILLETS R.015 FINISH ✓ THIRD ANGLE PROJECTION			
TOLERANCES (EXCEPT AS NOTED) SIZE RANGE TOLERANCE X < 6 ±0.1 6 ≤ X < 30 ±0.2 30 ≤ X < 120 ±0.3 120 ≤ X < 400 ±0.5 400 ≤ X < 1000 ±0.8 1000 ≤ X ±1.2		2 Rings 20A +8 Rings Signal + 16 Rings 1000M Ethernet Signal+4 Rings shield MODEL RX26061509	
RION		SIZE	A
		REV.	A / 0
		SCALE	1:1
		UNIT	mm