
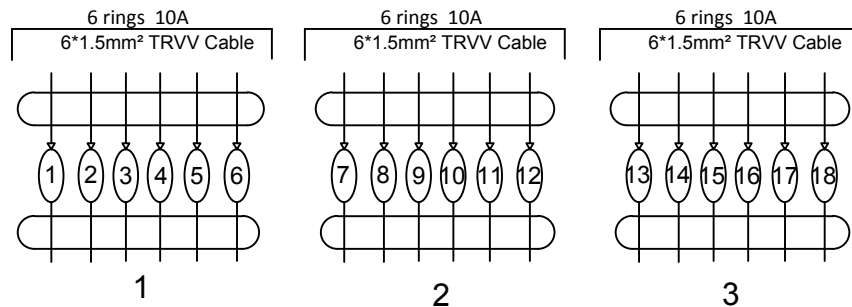


MARK	ECN NO.	Modify	Approve	DATE

THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

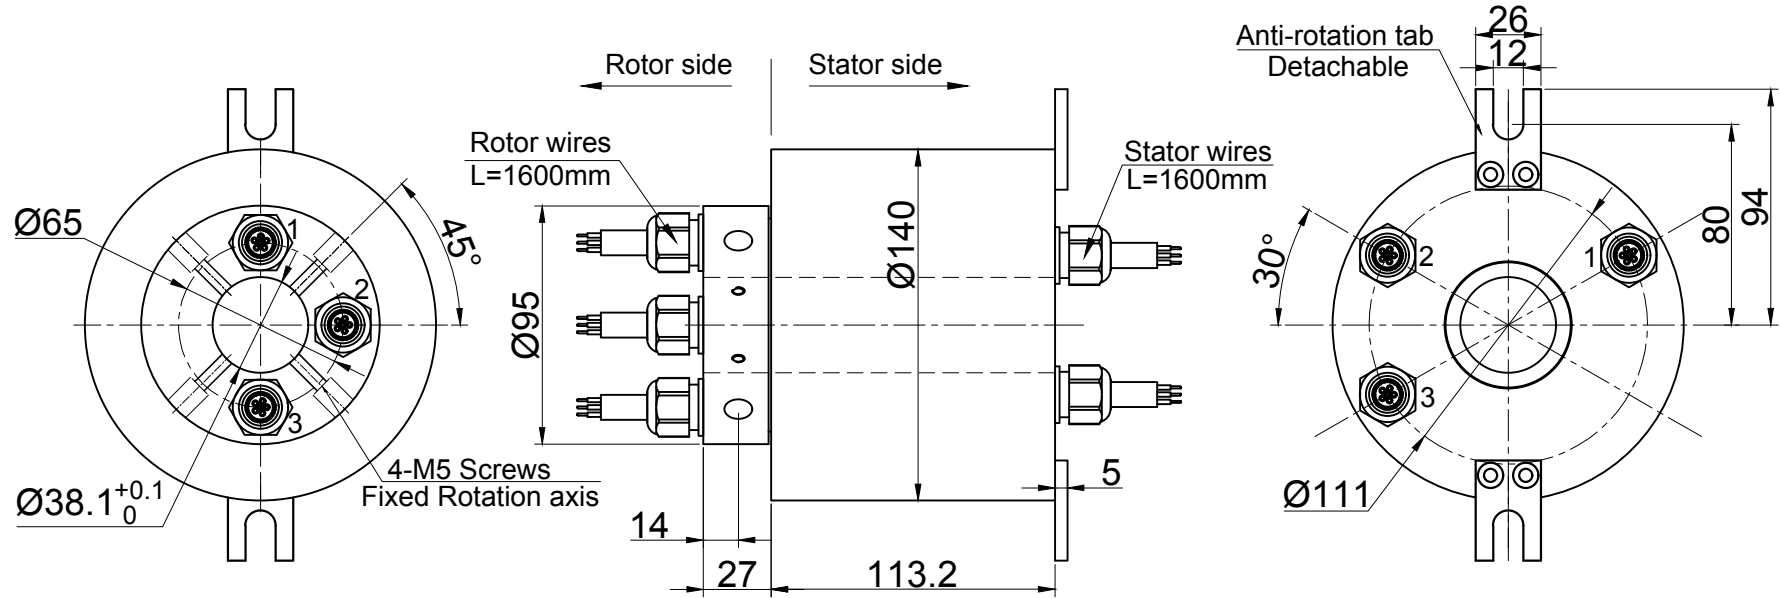

Electrical Specifications			
1 Rings	18	2 Current	Power module: 18 Rings 10A ;
3 Voltage	0~440 VAC/ VDC		
4 Insulation Resistance	$\geq 500\text{M}\Omega @ 500\text{VAC}$		
5 Electrical noise	MAX 10 m Ω		
6 Dielectric strength	500VAC@50Hz;60s		
Mechanical Specification			
7 Speed	0~250 rpm	8 Torque	MAX 30 N·m
Environmental adaptability			
9 Working temperature	-30 $^\circ\text{C}$ ~+100 $^\circ\text{C}$	10 Storage temperature	-35 $^\circ\text{C}$ ~+100 $^\circ\text{C}$
11 Humidity	85 \pm 3%RH(30 $^\circ\text{C}$ +5 $^\circ\text{C}$)		
12 Shock	40g,11ms,Half sine wave, Vertical 3 times,Horizontal 3 times		
13 IP rating	EX-DII-BT4		
Material/Attachment			
14 Contact Material	Noble metal	15 Housing material	Al Alloy + SUS304
16 Lead wire	Rotor:(See wiring diagram) Stator:(See wiring diagram)		

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		18 Rings 10A	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR.		SIZE RANGE	TOLERANCE	MODEL	RX26062301
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT.		X < 6	± 0.1	SIZE	A
		6 \leq X < 30	± 0.2	RE V.	A / 0
		30 \leq X < 120	± 0.3	SCALE	1:1
		120 \leq X < 400	± 0.5	UNIT	mm
		400 \leq X < 1000	± 0.8		
		1000 \leq X	± 1.2		
FILLET'S R.015	FINISH \checkmark	FRACTIONAL $\pm 1/16$			
THIRD ANGLE PROJECTION		ANGULAR $\pm 1^\circ$			
		(8.7)			