



MARK	ECN NO.	Modify	Approve	DATE

THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

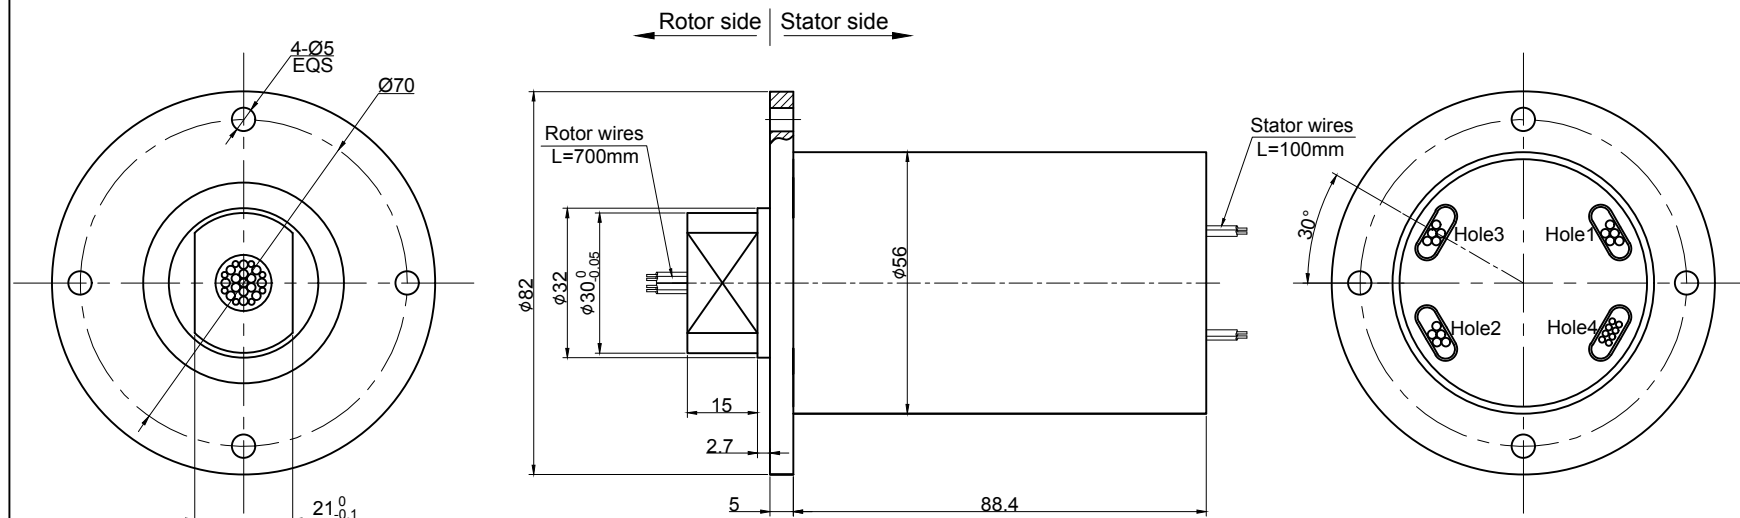

No potting for housing locking screws.
Wire core color and wiring sequence strictly comply with scheme.

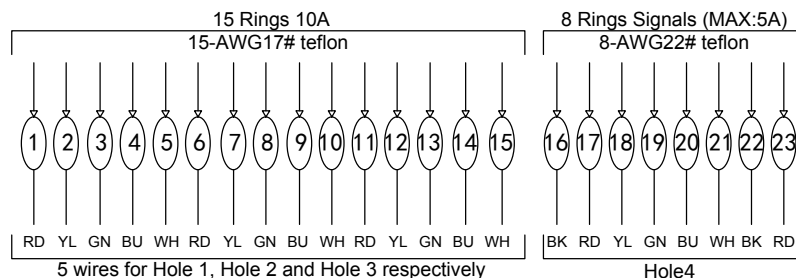

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		15 Rings 10A + 8 Rings Signals	
1. ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR.		SIZE RANGE		TOLERANCE	
2. MATERIAL & FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT.		X < 6		±0.1	
		6 ≤ X < 30		±0.2	
		30 ≤ X < 120		±0.3	
		120 ≤ X < 400		±0.5	
		400 ≤ X < 1000		±0.8	
		1000 ≤ X		±1.2	
FILLETS R.015	FINISH ✓	FRACTIONAL ±1/16		ANGULAR R±1°	
THIRD ANGLE PROJECTION		(0,0)			
		MODEL		RX26062701	
		SIZE		A	
		REV.		A / 0	
		SCALE		1:1	
		UNIT		mm	

Electrical Specifications

1 Rings	23	2 Current	Power module: 15 Rings 10A
3 Voltage	0~240VAC / VDC		
4 Insulation Resistance	≥500MΩ@500VDC		
5 Electrical noise	Max.5mΩ		Signal module: 8 Rings Signals
6 Dielectric strength	500VAC@50Hz;60s		

Mechanical Specification

7 Speed	0~150 rpm	8 Torque	MAX 2 N·m
---------	-----------	----------	-----------

Environmental adaptability

9 Working temperature	-30℃~+80℃	10 Storage temperature	-35℃~+85℃
11 Humidity	85±3%RH(30℃+5℃)		
12 Shock	40g,11ms,Half sine wave, Vertical 3 times,Horizontal 3 times		
13 IP rating	IP51		

Material/Attachment

14 Contact Material	Noble metal	15 Housing material	Al alloy + Engineering plastics
16 Lead wire	Rotor:(See wiring diagram)		
	Stator:(See wiring diagram)		