
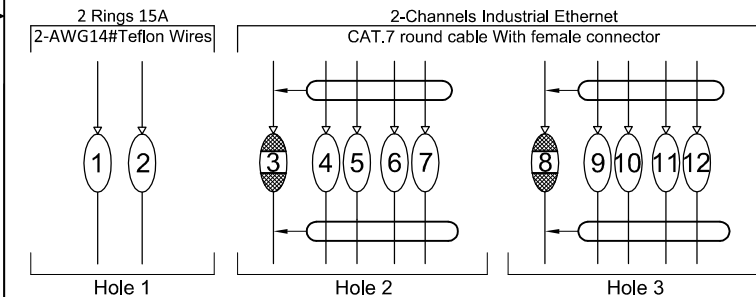


MARK	ECN NO.	Modify	Approve	DATE

THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

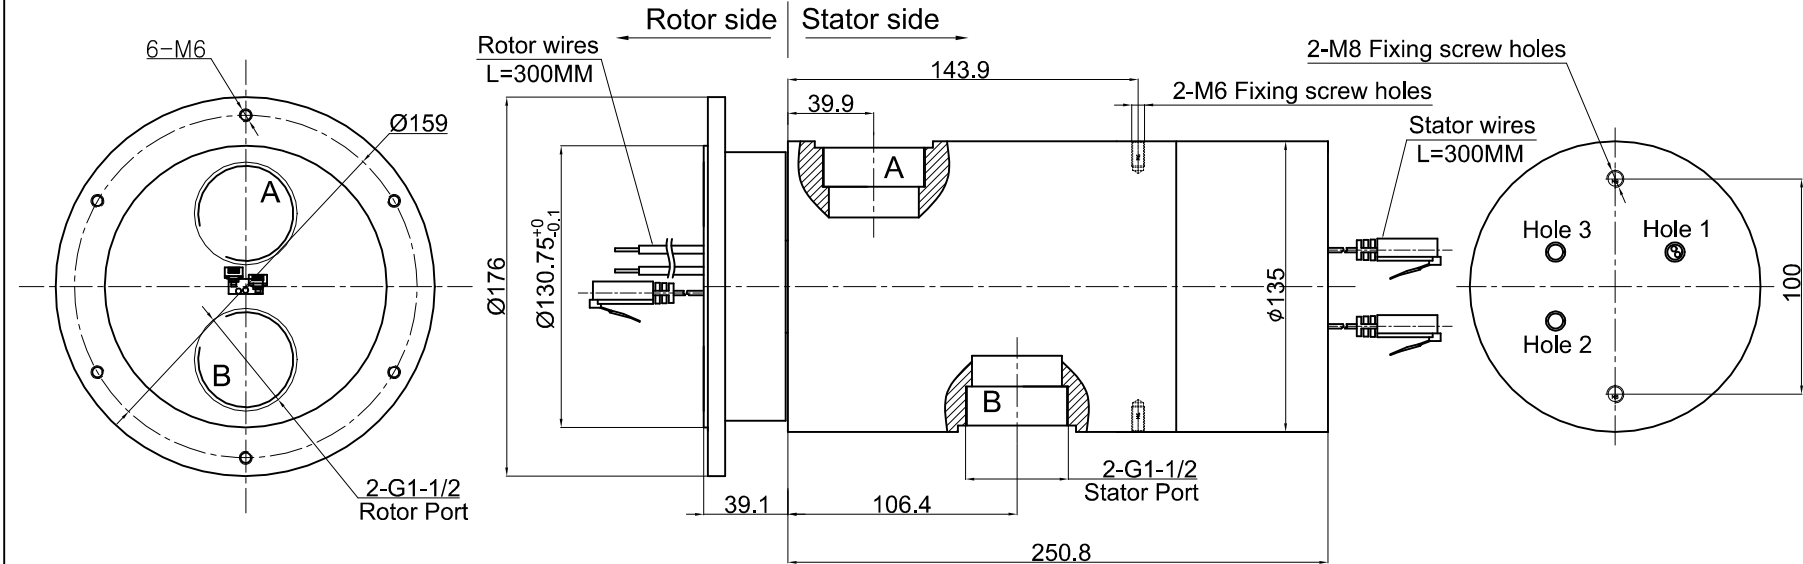

Technical parameters of rotary joint					
1	Pressure	≤ 1 MPa	2	Passage	2 Passages
3	Torque	Max. 2 N·m	4	Tracheal connector	G1-1/2
5	Media type	Compressed Air	6	Tracheal size	Ø25.4mm
7	Speed	0~150 rpm	8	Working temperature	-30℃~+80℃
9	Texture of materia	Al alloy	10	Storage temperature	-35℃~+85℃
UNLESS OTHERWISE SPECIFIED		2 Rings 15A + 2-Channels Industrial Ethernet			
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR.		MODEL RX26070904			
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT.		SIZE A			
FILLETS R.015		FINISH		SCALE 1:1	
THIRD ANGLE PROJECTION		FRACTIONAL±1/16		UNIT mm	
		ANGULAR±1°			
		(9,9)			

Electrical Specifications

1 Rings	12	2 Current	Power module: 2 Rings 15A Signal module: 2-Channels Industrial Ethernet
3 Voltage	0~380VAC / VDC		
4 Insulation Resistance	≥500MΩ@1000VDC		
5 Electrical noise	Max.5mΩ		
6 Dielectric strength	1000VAC@50Hz;60s		

Mechanical Specification

7 Speed	0~150 rpm	8 Torque	MAX 2 N·m
---------	-----------	----------	-----------

Environmental adaptability

9 Working temperature	-30℃~+80℃	10 Storage temperature	-35℃~+85℃
11 Humidity	85±3%RH(30℃+5℃)		
12 Shock	40g,11ms,Half sine wave, Vertical 3 times,Horizontal 3 times		
13 IP rating	IP51		

Material/Attachment

14 Contact Material	Noble metal	15 Housing material	Al alloy
16 Lead wire	Rotor:(See wiring diagram) Stator:(See wiring diagram)		