


MARK	ECN NO.	Modify	Approve	DATE

THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

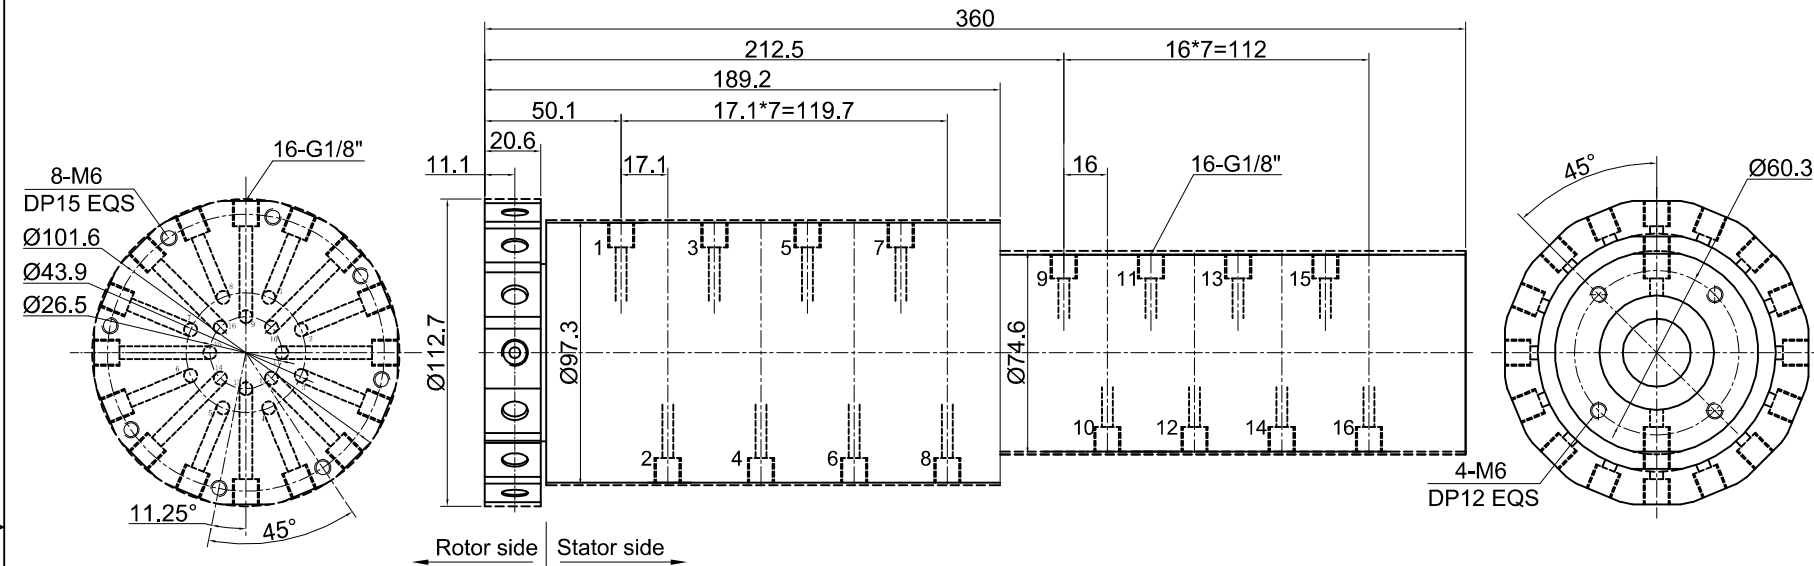

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		16 Passage Hydraulic oil	
1. ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR.		SIZE RANGE TOLERANCE		MODEL RX26071503	
2. MATERIAL & FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT.		X < 6	±0.1	RIONSR	SIZE A
FILLETS R.015	FINISH ✓	6 ≤ X < 30	±0.2		R.E.V. A / 0
THIRD ANGLE PROJECTION		30 ≤ X < 120	±0.3		SCALE 1:1
		120 ≤ X < 400	±0.5		UNIT mm
		400 ≤ X < 1000	±0.8		
		1000 ≤ X	±1.2		
		FRACTIONAL ±1/16 ANGULAR ±1° (8, 8)			

Technical parameters of rotary joint

1 Pressure	≤ 15 MPa	2 Passage	16 Passages
3 Torque	Max. 20 N·m	4 Tracheal connector	G1/8"
5 Media type	Hydraulic oil	6 Working temperature	-30℃~+80℃
7 Speed	0~50 rpm	8 Storage temperature	-35℃~+85℃
9 Texture of materia	Spindle special steel + wear-resistant coating treatment		